

OVERVIEW

Solo 20 Tunable White delivers ultimate flexibility in lighting design, offering control over colour temperature independently of brightness to suit a wide range of applications. Two distinct colour ranges are available: a super-warm to neutral option (1,800K to 3,000K), ideal for hospitality and residential settings, and a warm to cool option (2,700K to 5,000K), designed for tonal adjustments for artworks or human-centric lighting applications.

PERFORMANCE SUMMARY

	1800 - 3000K				2700 - 5000K			
	Narrow	Medium	Wide	V. Wide	Narrow	Medium	Wide	V. Wide
FWHM	20°	27°	38°	57°	21°	28°	38°	57°
Luminous Flux*	1,554 lm	1,400 lm	1,406 lm	1,471 lm	1,820 lm	1,682 lm	1,568 lm	1,768 lm
Peak Intensity	25,452 Cd	14,047 Cd	6,230 Cd	3,074 Cd	10,971 Cd	6,418 Cd	3,942 Cd	2,157 Cd
CCT Tuning Range	1800 - 3000K				2700 - 5000K			
CRI Min.	CRI 90 (R9: 75)				CRI 90 (R9: 75)			
Typ. Current	605 mA				700 mA			
Nom. Voltage	36 V				36 V			
Max. Wattage	26.0 W				26.3 W			
Max. Efficacy	75.1 lm/W				74.6 lm/W			
Driver Type	Constant Current Remote				Constant Current Remote			
Class	SELV Class III				SELV Class III			

* Luminous Flux @ 3000K as delivered

ORDERING CODES

Luminaire:

Base Code		Type		Output		CCT		Beam Angle		Finish
SOL20	-	SP	Surface Plate	TWSO	Tunable White	18K30K	1800K - 3000K	NR	Narrow	WH White
						27K50K	2700K - 5000K	ME	Medium	BK Black
								WD	Wide	AL Brushed Aluminium
								VW	Very Wide	RBZ Rubbed Bronze
								BR	Brushed Brass	PB Polished Brass

Driver:


Region Code		Type		Fixture Code		Driver*
PSCC	230VAC	RM	Remote	1120T01	Solo 20 Tunable White 1800 - 3000K	01D DALI DT6 50W
				1120T02	Solo 20 Tunable White 2700 - 5000K	01E DALI DT8 50W
						01C Casambi 50W

* See Driver Selection page for more details



TUNABLE WHITE TECHNOLOGY

Precision's Tunable White technology allows users to adjust the correlated colour temperature (CCT) of their fixture on demand, with options for analogue, digital, or wireless control. Two tuning ranges are available to suit a range of applications. Ultra-warm 1800K to 3000K is perfectly suited to mood-setting in residential and hospitality applications. Alternatively, 2700K to 5000K allows tuning between warm and cool light to support human-centric applications, or tonal adjustments when lighting artworks. By default, our tunable white fixtures are biased towards maximising the total lumen output across the tuning range, but it is possible to configure the fixture to maintain light output instead. Speak to your sales rep for more details.

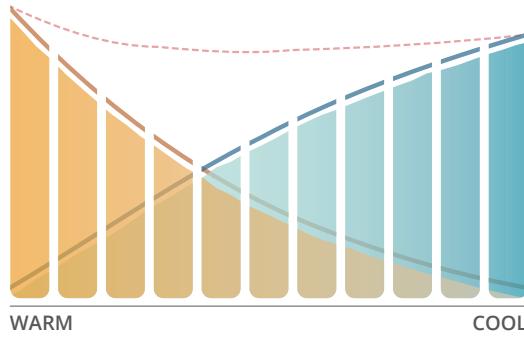

LIFETIME + ENVIRONMENTAL

At Precision, we design and engineer our products with longevity in mind. Many of the components that make up our light fixtures are both modular, and re-usable, making it possible to service and repair them throughout their life in service. Once our products reach the end of their useful life, it is possible to re-work and renew them into a new product. We prioritise the use of recyclable materials in both our products and packaging, and encourage our customers to engage responsibly in the correct disposal of any materials we supply.

tunable/**WHITE**

UK PART L

Part L1A / L1B (Dwellings)

Part L2A (General)

Part L2A (Display)

CIBSE TM65


28.023 Kg/CO2e

CIBSE TM66

2.4



DIMENSIONS

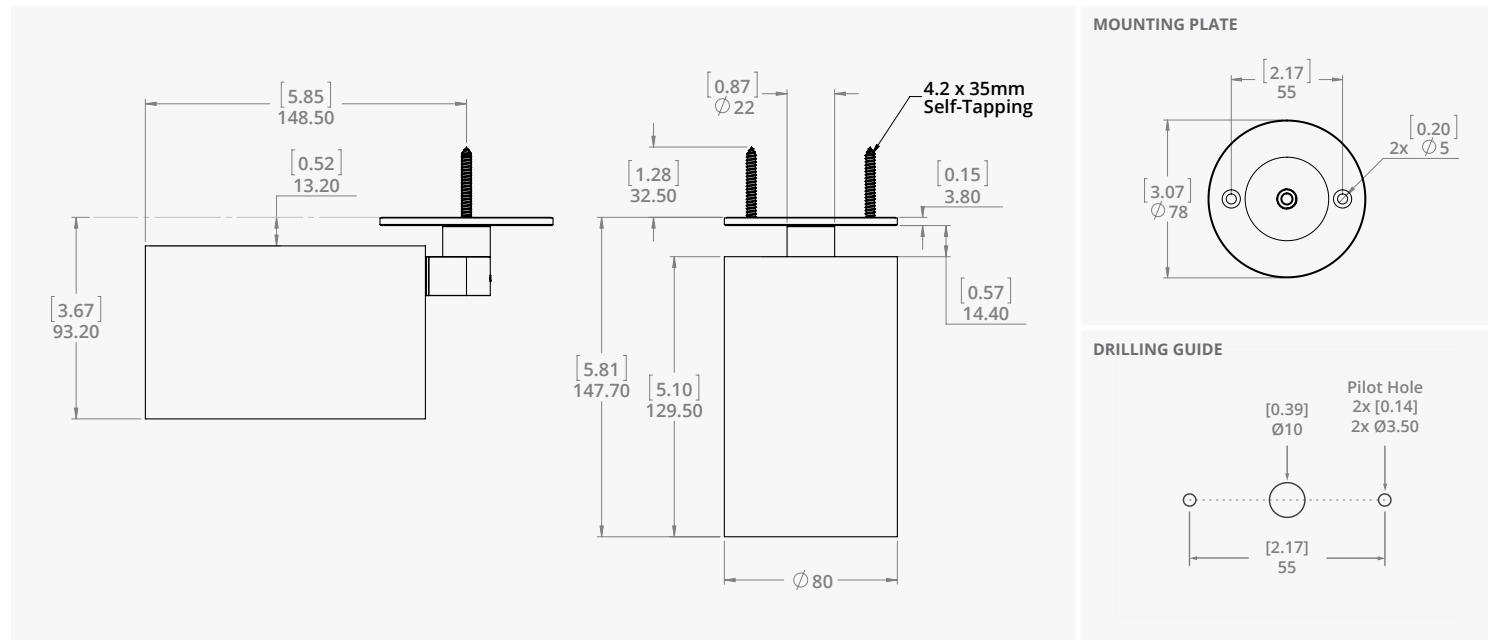

MECHANICAL

Location	IP20 Indoor Dry Location Only
Mounting	Surface plate with decorative cover
Adjustability	360° Lockable Pan 90° Tilt
Material	Aluminium 6063 or Brass H59
Weight	0.80 Kg [1.76 lbs] or 1.38 Kg [3.04 lbs]

CABLE

Gauge	22 AWG 0.32 mm ²
Std. Length	600 mm (23.60 in) as flying lead
Material	FEP (Outer), FEP (Inner)
Cable ID	Red (+), Black (-)

FINISHES





DRIVER SELECTION | 230V REGIONS

Remote | 50W | DALI DT6

Input Voltage	230 VAC 50/60 Hz
Driver Type	Constant Current Remote
Location	IP20 Indoor Dry Location Only
Dimming Control	DALI (Device Type 6)
Min. Dim Level	0.1%
Flicker	IEEE P1789 Compatible No Observable Effect
Hotplug Protection	Yes

Wiring Distances

16 AWG 1.30mm ²	Max. 36 m (115 ft)
18 AWG 0.75mm ²	Max. 22 m (70 ft)

1800K / 3000K 2700K / 5000K

Compatibility	●	●
Max. Fixtures	1	1
Order Code	PSCC-RM-1120T01-01D	PSCC-RM-1120T02-01D

Remote | 50W | DALI DT8


Input Voltage	230 VAC 50/60 Hz
Driver Type	Constant Current Remote
Location	IP20 Indoor Dry Location Only
Dimming Control	DALI (Device Type 8)
Min. Dim Level	0.1%
Flicker	IEEE P1789 Compatible No Observable Effect
Hotplug Protection	Yes

Wiring Distances


16 AWG 1.30mm ²	Max. 36 m (115 ft)
18 AWG 0.75mm ²	Max. 22 m (70 ft)

1800K / 3000K 2700K / 5000K

Compatibility	●	●
Max. Fixtures	1	1
Order Code	PSCC-RM-1120T01-01E	PSCC-RM-1120T02-01E

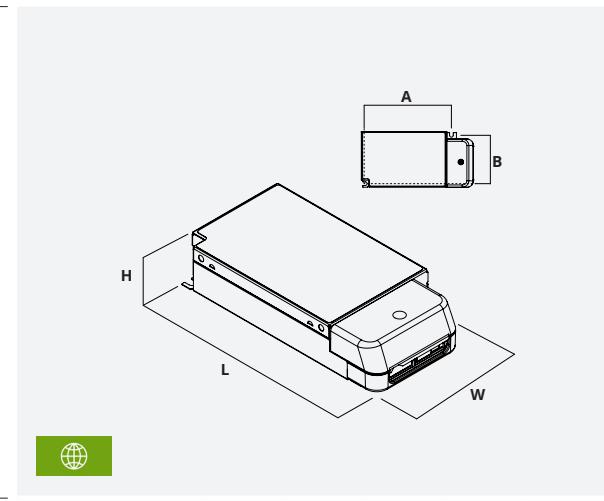

	L	W	H	A	B
mm	153	76.2	30.5	118	66.2
in	6.0	3.0	1.2	4.65	2.6

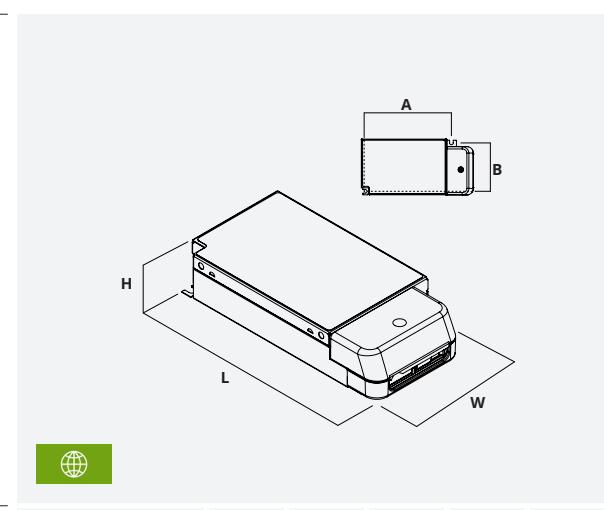

	L	W	H	A	B
mm	153	76.2	30.5	118	66.2
in	6.0	3.0	1.2	4.65	2.6




DRIVER SELECTION | 230V REGIONS

Remote | 50W | Casambi

Input Voltage	230 VAC 50/60 Hz
Driver Type	Constant Current Remote
Location	IP20 Indoor Dry Location Only
Dimming Control	Casambi Bluetooth Mesh App Required ↗
Min. Dim Level	0.1%
Flicker	IEEE P1789 Compatible No Observable Effect
Hotplug Protection	Yes

Wiring Distances

16 AWG 1.30mm ²	Max. 36 m (115 ft)
18 AWG 0.75mm ²	Max. 22 m (70 ft)

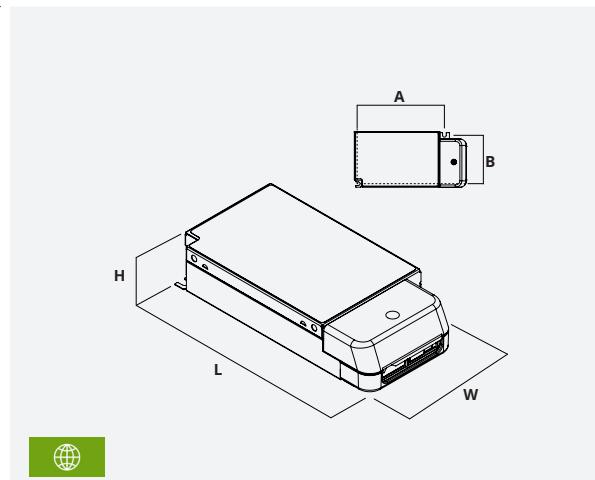

1800K / 3000K

2700K / 5000K

Compatibility



Max. Fixtures

1

1

Order Code

PSCC-RM-1120T01-01C

PSCC-RM-1120T02-01C

	<i>L</i>	<i>W</i>	<i>H</i>	<i>A</i>	<i>B</i>
mm	153	76.2	30.5	118	66.2
in	6.0	3.0	1.2	4.65	2.6





1800K / 3000K

PHOTOMETRY DIAGRAMS



Narrow | 20° Beam

FWHM	20°
Delivered Flux	1,554 lm
Peak Intensity	25,452 Cd
UGR	8.7 UGR

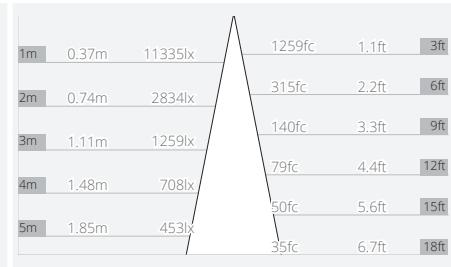




Medium | 27° Beam

FWHM	27°
Delivered Flux	1,400 lm
Peak Intensity	14,047 Cd
UGR	11.5 UGR

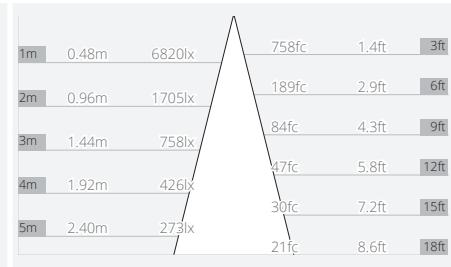




Wide | 38° Beam

FWHM	38°
Delivered Flux	1,406 lm
Peak Intensity	6,230 Cd
UGR	12.1 UGR

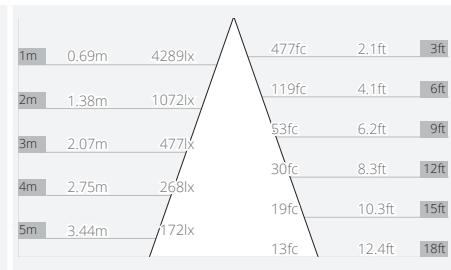

Very Wide | 57° Beam

FWHM	57°
Delivered Flux	1,471 lm
Peak Intensity	3,074 Cd
UGR	19.1 UGR

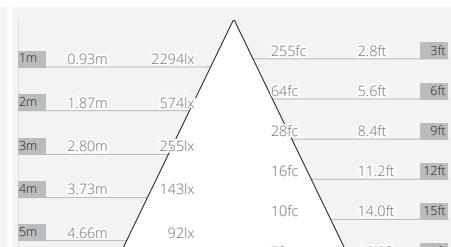

All diagrams and data as measured @ 3000K

PERFORMANCE SCALING BY CCT

CCT	Output Multiplier	Colour Consistency
1800K	x0.57	5 SDCM
2000K	x0.71	
2400K	x0.96	
2700K	x0.99	
3000K	x1.00	3 SDCM



Digital photometric files available as .LDT format.
Contact your sales rep or visit www.luminii.com for more information.







2700K / 5000K

PHOTOMETRY DIAGRAMS



Narrow | 21° Beam

FWHM	21°
Delivered Flux	1,554 lm
Peak Intensity	25,452 Cd
UGR	9.2 UGR

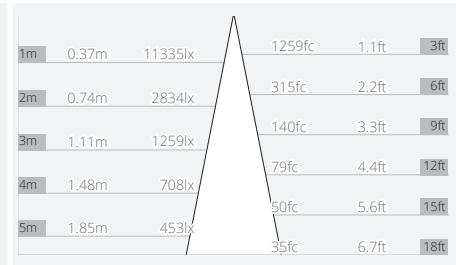




Medium | 28° Beam

FWHM	28°
Delivered Flux	1,400 lm
Peak Intensity	14,047 Cd
UGR	12.7 UGR

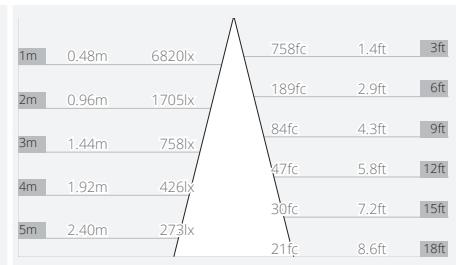




Wide | 38° Beam

FWHM	38°
Delivered Flux	1,406 lm
Peak Intensity	6,230 Cd
UGR	12.9 UGR

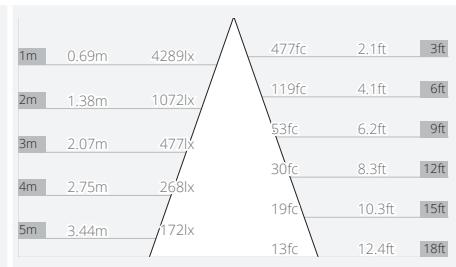

Very Wide | 57° Beam

FWHM	57°
Delivered Flux	1,471 lm
Peak Intensity	3,074 Cd
UGR	20 UGR

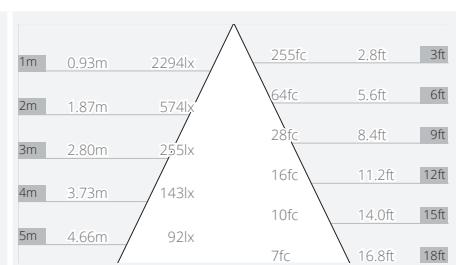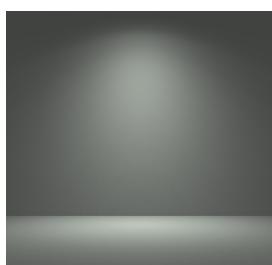

All diagrams and data as measured @ 3000K

PERFORMANCE SCALING BY CCT

CCT	Output Multiplier	Colour Consistency
2700K	x0.87	3 SDCM
3000K	x1.00	
3500K	x1.04	
4000K	x1.09	
4500K	x1.11	
5000K	x1.10	3 SDCM



Digital photometric files available as .LDT format.
Contact your sales rep or visit www.luminii.com for more information.




PRODUCT ANATOMY



*Optical accessories ordered separately

- 1 High Output COB Light Engine with Tunable White technology
- 2 Interchangeable Colour Mixing TIR Optic
- 3 Integral Double Accessory Holder
- 4 Range of Optical Accessories
- 5 Accessory Retention Clip

INTEGRATED ACCESSORY HOLDERS

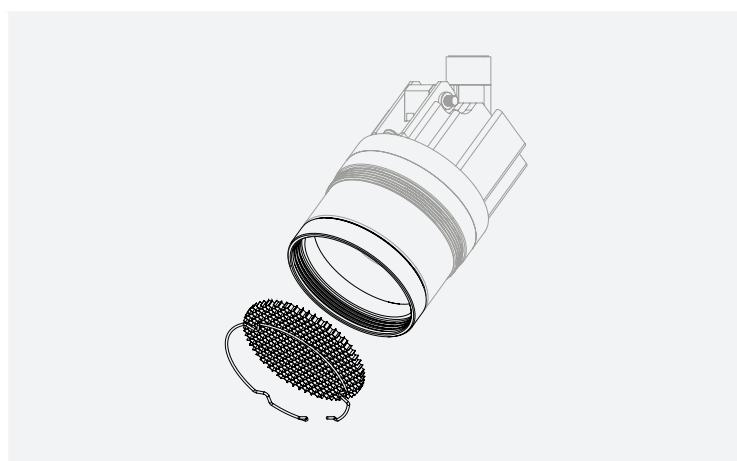

Double Accessory Holder


Built-in to Solo 20 Tunable White

Accessory Dia. Ø68mm | Ø2.68"

Capacity 5.0mm | 0.2" Max Thickness



GLARE GUARD ACCESSORY HOLDER

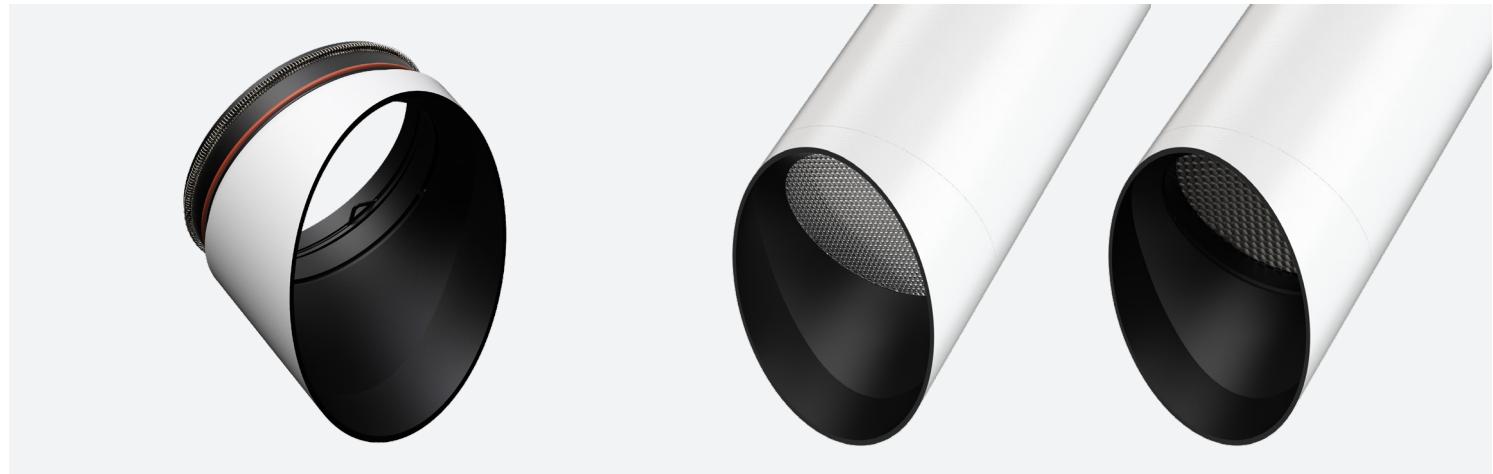


The Glare Guard Accessory Holder is an angled, snap-in snoot extension capable of holding a range of optical accessories, including honeycombs, gels, and beam shaping optics such as Wallwash and Linear Spread Lenses. The holder comprises of two halves, a front compartment and a rear compartment. The rear compartment is capable of holding a single accessory, whilst the front compartment is used to hold orientation dependent beam shaping optics such as the Wallwash and Linear Spread lens.

	a. Front Compartment	b. Rear Compartment
Accessory Diameter	Ø66 mm 2.60"	Ø68 mm 2.67"
Capacity	1.2mm 0.05" Max. Thickness	3.2mm 0.125" Max. Thickness
Orientation Indexing	Yes - Alignment Notches	No
Weight	Aluminium: 114g Brass: 287g	

Ordering Codes*

	Black	1120-GLR-01-BK		Polished Brass	1120-GLR-02-PB
	Traffic White	1120-GLR-01-TW		Brushed Brass	1120-GLR-02-SB
	Brushed Aluminium	1120-GLR-01-AL		Rubbed Bronze	1120-GLR-02-RB

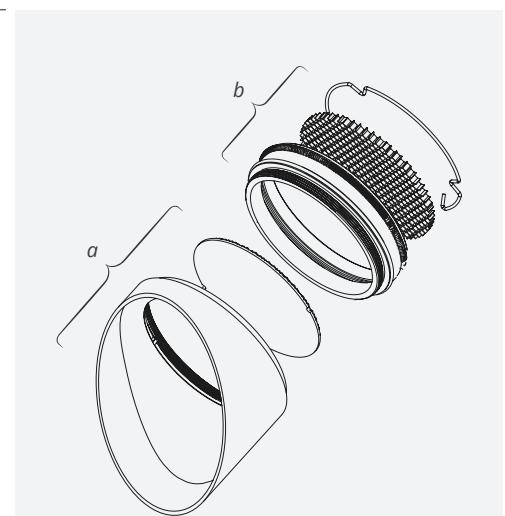


*Optical accessories ordered separately




Orientation Indexing

For optical accessories that require a specific orientation, use their alignment notches to position them correctly within the Glare Guard Accessory Holder.

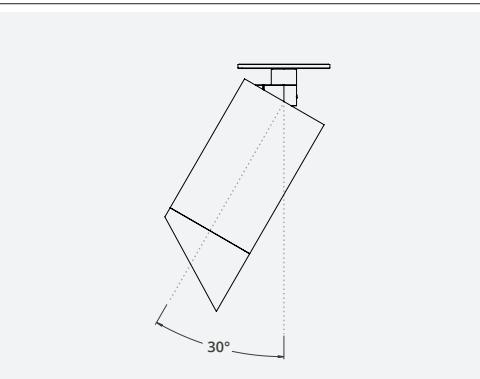

Wallwash Fixture Angle

For optimum performance, the fixture should be angled at approx. 30° from the vertical plane.

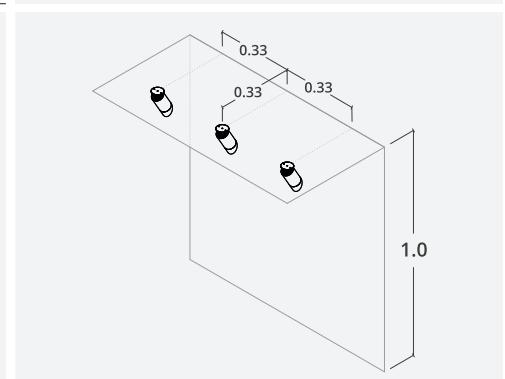


Wallwash Positioning and Pitch

Wallwash fixtures should be positioned one-third of the ceiling height away from the wall and spaced apart by the same distance.



SNOOT ACCESSORY HOLDER

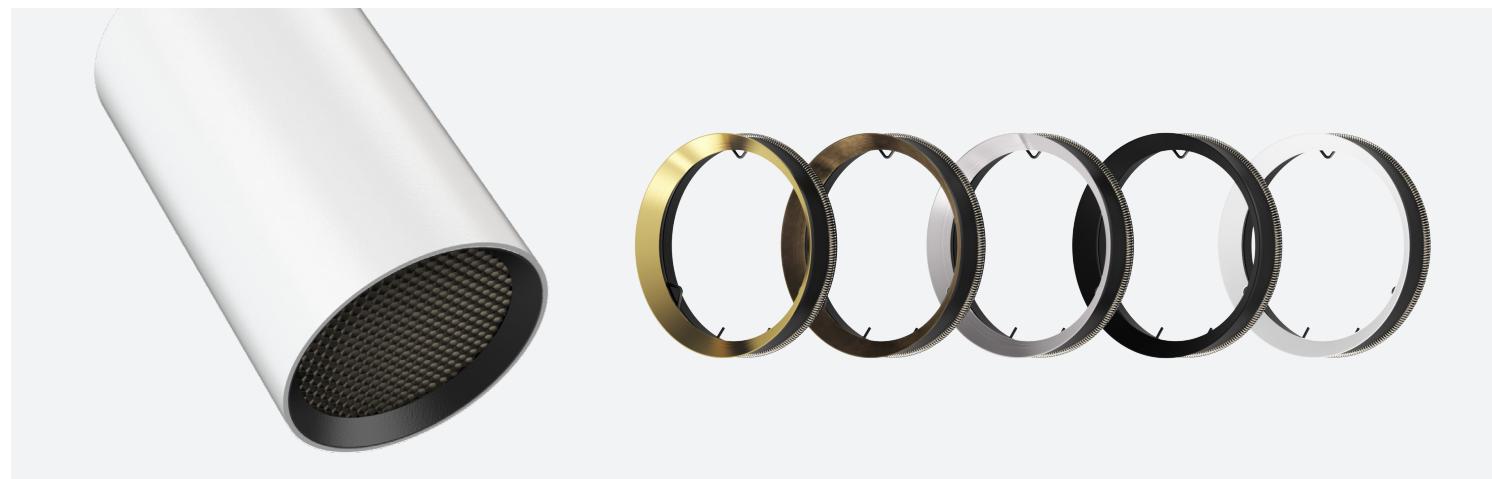

The Snoot Accessory Holder (sold separately) enhances the Solo 20's optical accessory capacity while adding decorative trim in a variety of complementary finishes. Its snap-in, snap-out mechanism is completely tool-free, making on-site adjustments simple and ensuring the holder fits flush with the snoot's front edge.

Accessory Diameter	Ø68 mm 2.67"
Capacity	3.2mm 0.125" Max. Thickness
Orientation Index	No
Weight	Aluminum 31g Brass 91g

Ordering Codes*

	Black	1120-HOL-01-BK		Polished Brass	1120-HOL-02-PB
	Traffic White	1120-HOL-01-TW		Brushed Brass	1120-HOL-02-SB
	Brushed Aluminium	1120-HOL-01-AL		Rubbed Bronze	1120-HOL-02-RB



*Optical accessories ordered separately



OPTICAL ACCESSORIES

SPARE OPTICS



Narrow TIR Optic

For Solo 20 Tunable White

HKRG-68-15-PC



Medium TIR Optic

For Solo 20 Tunable White

HKRG-68-24-PC



Wide TIR Optic

For Solo 20 Tunable White

HKRG-68-36-PC




Very Wide TIR Optic

For Solo 20 Tunable White

HKRG-68-50-PC

GLARE CONTROL



Ø68 Honeycomb Louvre

Ø68 x 3.2mm | Ø2.67 x 0.125"

Fits all accessory holders

995-68-BK

BEAM MODIFIERS




Ø68 Linear Spread Lens

Ø68 x 3.0mm | Ø2.67 x 0.12"

Fits all accessory holders

HKFD-68-LIN




Ø66 Linear Spread Lens

Ø66 x 1.2mm | Ø2.60 x 0.05"

For Glare Guard Accessory only

HKFD-68-LIN-1



Ø66 Wallwash Lens

Ø66 x 1.2mm | Ø2.60 x 0.05"

For Glare Guard Accessory only

HKFD-68-WAS-1