

# ASTERIA 1

RECESSED WALL WASHING LED DOWNLIGHT



 **senso**  
by luminii

**Asteria 1 - Recessed Wall Washing LED Downlight.** The true brilliance of a cutting-edge wall-washing recessed fixture comes from the depth of the aperture design. Balancing the angle and depth of the light source is critical for glare control and light projection. The Asteria 1 achieves this balance, creating amazing light on the area of play.

## Ordering Code

Fixture	<b>801</b>						
	1	2	3	4	5	6	7
Driver		<b>801</b>			--	--	
	1	2	3	4	5	6	

## Product Specifications

**SAMPLE:** Fixture 801 - A90 - 618 - 27 - 07 - 00 - 01 | Driver 910 - 801 - STD - 120 - A90 - 07

1 - Model	2 - CRI/LED	3 - Reflector	4 - CCT	5 - Lumen	6 - Accessory	7 - Finish
<b>801</b> · Asteria 1	<b>A90</b> · 93+ CRI Accuracy	<b>618</b> · Wall Wash	<b>25</b> · 2500K <b>27</b> · 2700K <b>30</b> · 3000K <b>35</b> · 3500K <b>40</b> · 4000K <b>65</b> · 6500K	<b>07</b> · 700 (7.5W) <b>10</b> · 1000 (10.2W) <b>13</b> · 1300 (13.3W) <b>20</b> · 2000 (22.0W) <b>30</b> · 3000 (30.5W)	<b>00</b> · No Accessory <b>FL</b> · Frosted Lens	<b>01</b> · White <b>02</b> · Black <b>08</b> · Silver <b>XX</b> · Custom

1 - Housing Style	2 - Model	3 - Driver	Dim Level	Dim Level	4 - Line Voltage	
<b>910</b> · Remote <b>915</b> · New Construction	<b>801</b> · Asteria 1	<b>STD</b> · Non Dimming <b>LCS</b> · 0 - 10 Volt Protocol <b>DIM</b> · Phase <sup>1</sup> <b>ELDOLC</b> · EldoLED 0 - 10 Volt <sup>2</sup> <b>DALI</b> · DALI Protocol <sup>2</sup>	N/A 1% 1% 0.1% 0.1%	<b>LUTES</b> · Hilume Ecodigital <sup>2</sup> <b>LUT2W</b> · 2 Wire for phase <sup>1/2</sup> <b>DMX</b> · SENSO <sup>2</sup> <b>EMG</b> · Emergency Driver <sup>2/4</sup> <b>CSMB</b> · Casambi Wireless Control <sup>3/4</sup>	1% 1% 1% 1% 1%	<b>120</b> · 120V <b>277</b> · 277V <b>347</b> · 347V <sup>5</sup>

5 - LED	6 - Lumen	Project :
Same as Fixture	Same as Fixture	Quantity : Type : Notes :

\*1 120V only  
\*2 Requires **910** - Remote  
\*3 Specified separately  
\*4 Second driver required  
\*5 Not available with ELDOL, Lutron or DMX

# ASTERIA 1

RECESSED WALL WASHING LED DOWNLIGHT

 **senso**  
by luminii


## Installation

- For new and retrofit installations
- Holds in place with three friction fit spring clips
- Simple connection between fixture and driver via quick connect
- Fixed tilt angle of 18° with 10° fine tuning adjustment

## Construction / Finish

- Custom finishes are available
- Cast aluminum trim
- Rated for damp location
- Made in Canada


## Dimensions

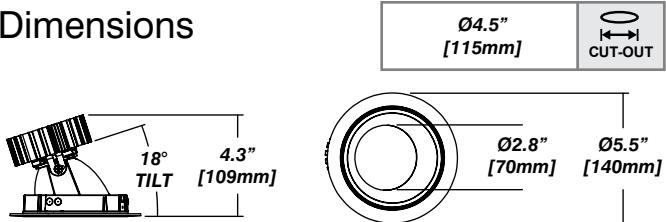

## Reflector

### Faceted Reflector

Senso metal spun reflectors for function, low glare and efficiency

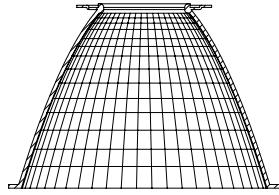

## Photometrics

Senso's in-house photometric testing ensures that our lighting design can match your needs precisely. Our Goniophotometer and testing lab produces on-demand photometry files based on any specified fixture, including LM-79 Test reports, IES Files, and CRI/CCT measurements. See [Sensolighting.com](http://Sensolighting.com) for more information.

\*Full photometric Reports and IES files available for every configuration

## Color Metrics

### TM 30-15

Our clients deserve the best information possible about their lighting choices. That's why Senso has invested in the Illuminating Engineering Society (IES) TM 30-15, a new system that measures an LED light source's color rendering properties. Using Senso's state-of-the-art goniophotometer, this method identifies the optimal light source for your project and helps evaluate the trade-offs between efficacy and color rendering. Senso can provide TM 30-15 data for all of our products.

\*Full Color Metric Info Available at [Sensolighting.com](http://Sensolighting.com)

## LED Module Performance

**Output:** Up to 100 lumen/Watt

**Efficacy:** Color consistency within a 3-MacAdam Ellipse

**CCT:** 2500K - 6500K

**Color Rendering:** 93+ CRI

**Min. R Values:** R<sup>g</sup>- 60 R<sup>f</sup>- 90 R<sup>g</sup>- 100

## Driver and Power Consumption

**Dimming:** 1% dimming standard with 0.1% option

Casambi wireless control available

**Ripple:** Industry leading Low ripple

**Efficiency:** Power Factor >0.9

Efficiency over 85%


Class 2 output for safety

**Installation:** Remote mounted


Lumen Option	700lm	1000lm	1300lm	2000lm	3000lm
Fixture Wattage	7.5W	10.2W	13.3W	22W	30.5W
Delivered Lumen	746lm	1024lm	1309lm	2040lm	2953lm

### Housing Options

#### Standard Senso Housing - 910

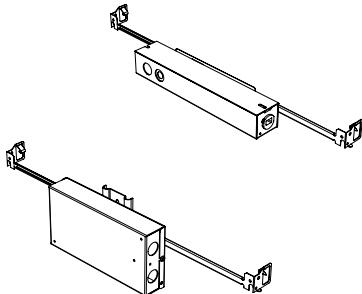

#### Dimension

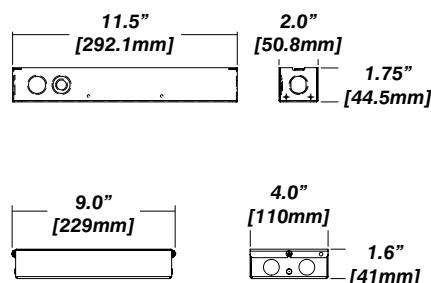

#### Included

Unless specified otherwise, this is provided as standard

##### Bar hanger

- Length: from 14-3/16" to 26"

##### Driver with enclosure

- Galvanized steel enclosure


##### Security wire

- Flexible aircraft cable, 12" long
- Easy to clip snap body included


\* driver can be installed either:

- (A) laying on top of ceiling.
- (B) mounted to the bar hanger and fixed to the ceiling.
- (C) remote from the fixture, with the bar hanger still used if desired to secure the fixture

#### New Construction - 915

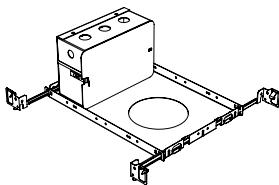

#### Dimension

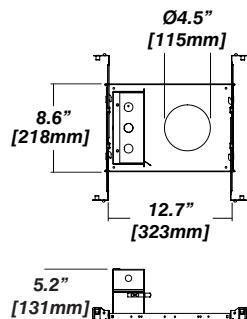

#### Included

##### Plaster Frame

- Galvanized steel construction with precise cut-out

##### Bar hanger

- Length: from 14-3/16" to 26"

##### Security wire

- Flexible aircraft cable, 12" long
- Easy to clip snap body included