RO Channel - Installation Instructions

PLENUM FOR SUCH USE IN ACCORDANCE WITH UL2043


REV0.2
02162026

luminii
7777 Merrimac Ave
Niles, IL 60714
T 224.333.6033
F 224.757.7557
info@luminii.com
www.luminii.com

Please read all instructions prior to installation and keep for future reference!


1. Product should be installed by a qualified electrician.
2. Prior to installation ensure power is off at fuse box to prevent electrical shock.

1

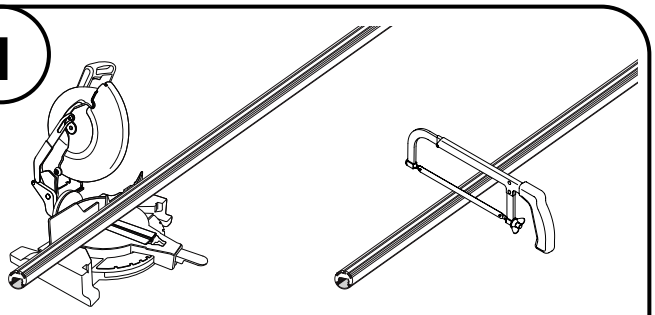


If required for installation cut down the RO aluminum extrusion to desired length with hacksaw or miter saw that has an appropriate blade for cutting aluminum. Always wear safety goggles when cutting. Then cut down accompanying lens to fit the new length.

2

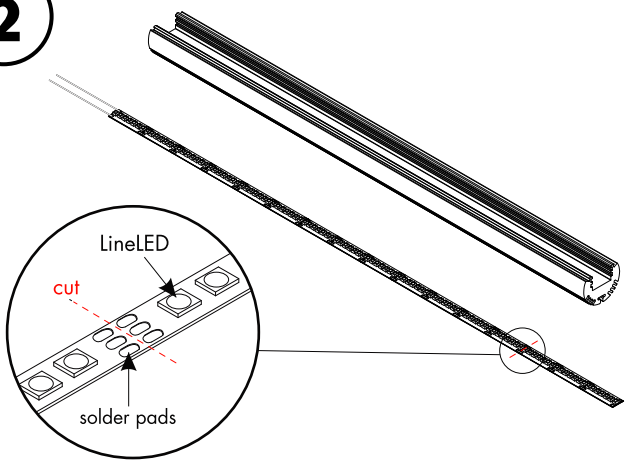

If required to fit the new RO extrusion length, cut down the Line LED strip in between two rows of solder pads. Always cut LineLED from end without connector / lead wires. Ensure that Line LED strip fits **completely** inside the extrusion and the solder pads do not touch the metal end caps to avoid shorting of circuit.

3

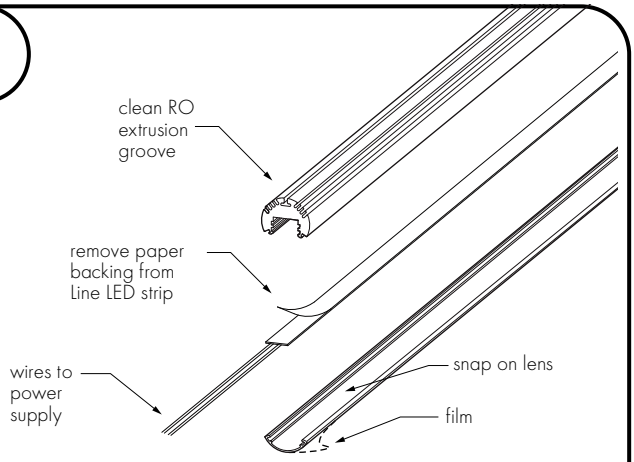

After cutting extrusion and lens, clean both thoroughly with a wet rag and ensure they are completely dry before installing LED strip. Gently press Line LED inside extrusion and then snap on the lens.

Remove the protective film from the lens.

*LUMINII RESERVES THE RIGHTS TO CHANGE SPECIFICATION & INSTRUCTION WITHOUT NOTICE

RO Channel - Installation Instructions

PLENUM FOR SUCH USE IN ACCORDANCE WITH UL2043


REV0.2
02162026

luminii
7777 Merrimac Ave
Niles, IL 60714
T 224.333.6033
F 224.757.7557
info@luminii.com
www.luminii.com

Please read all instructions prior to installation and keep for future reference!

1. Product should be installed by a qualified electrician.
2. Prior to installation ensure power is off at fuse box to prevent electrical shock.


End Mounting Install

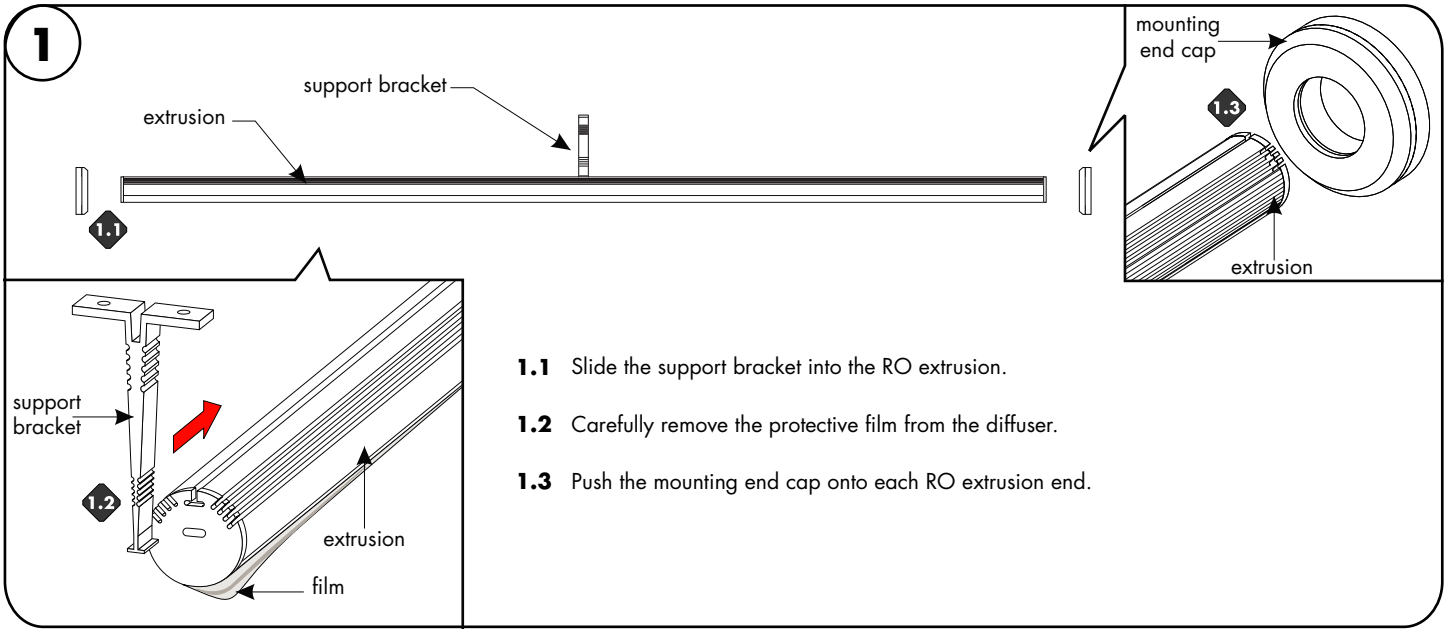

1.1 Slide the support bracket into the RO extrusion.

1.2 Carefully remove the protective film from the diffuser.

1.3 Push the mounting end cap onto each RO extrusion end.

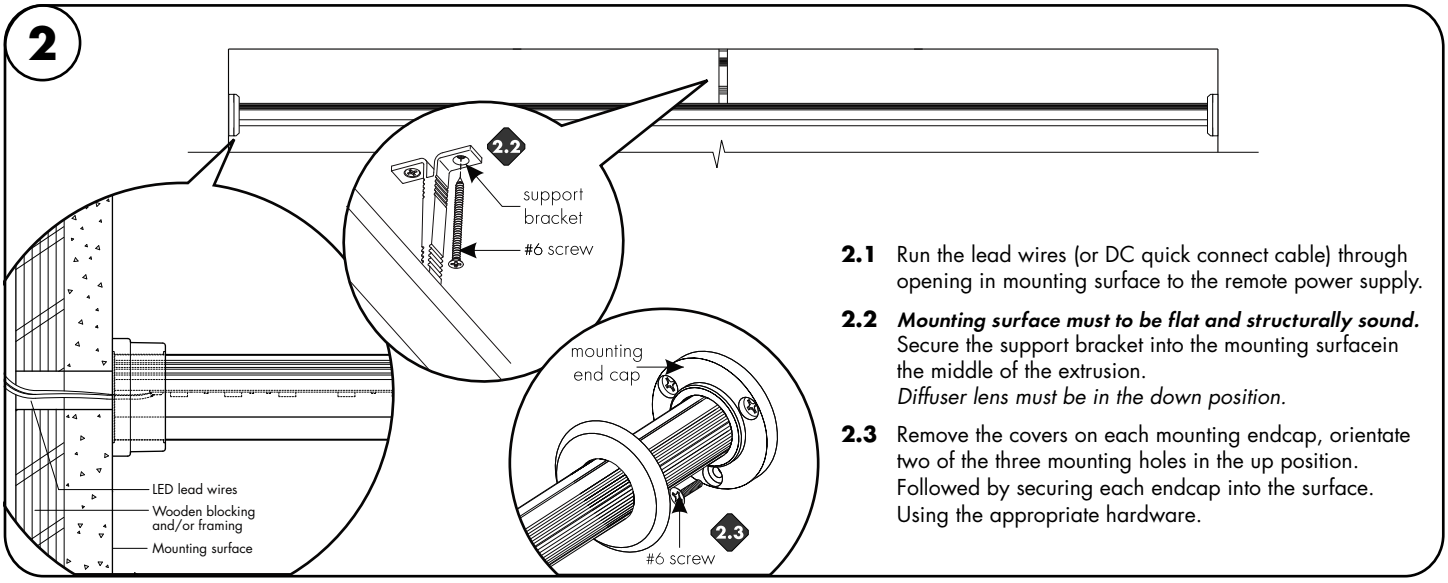

2.1 Run the lead wires (or DC quick connect cable) through opening in mounting surface to the remote power supply.

2.2 ***Mounting surface must to be flat and structurally sound.*** Secure the support bracket into the mounting surfacein the middle of the extrusion.
Diffuser lens must be in the down position.

2.3 Remove the covers on each mounting endcap, orientate two of the three mounting holes in the up position. Followed by securing each endcap into the surface. Using the appropriate hardware.

*LUMINII RESERVES THE RIGHTS TO CHANGE SPECIFICATION & INSTRUCTION WITHOUT NOTICE

RO Channel - Installation Instructions

PLENUM FOR SUCH USE IN ACCORDANCE WITH UL2043

REV0.2
02162026


luminii
7777 Merrimac Ave
Niles, IL 60714
T 224.333.6033
F 224.757.7557
info@luminii.com
www.luminii.com

Please read all instructions prior to installation and keep for future reference!

1. Product should be installed by a qualified electrician.
2. Prior to installation ensure power is off at fuse box to prevent electrical shock.

Stem Mounting Install


1

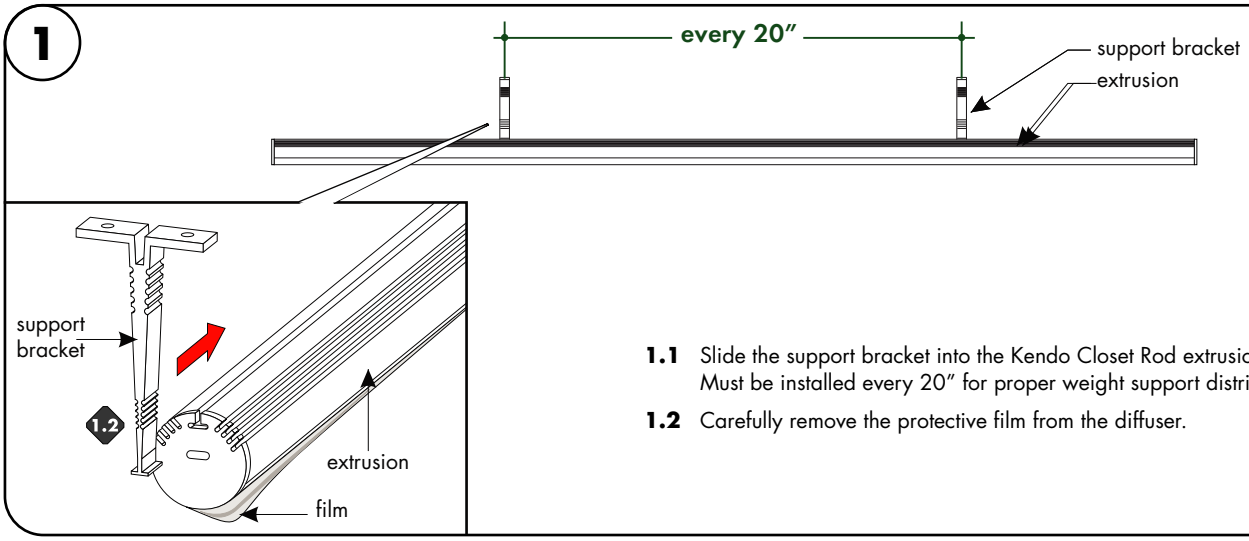

1.1 Slide the support bracket into the Kendo Closet Rod extrusion. Must be installed every 20" for proper weight support distribution.

1.2 Carefully remove the protective film from the diffuser.

2

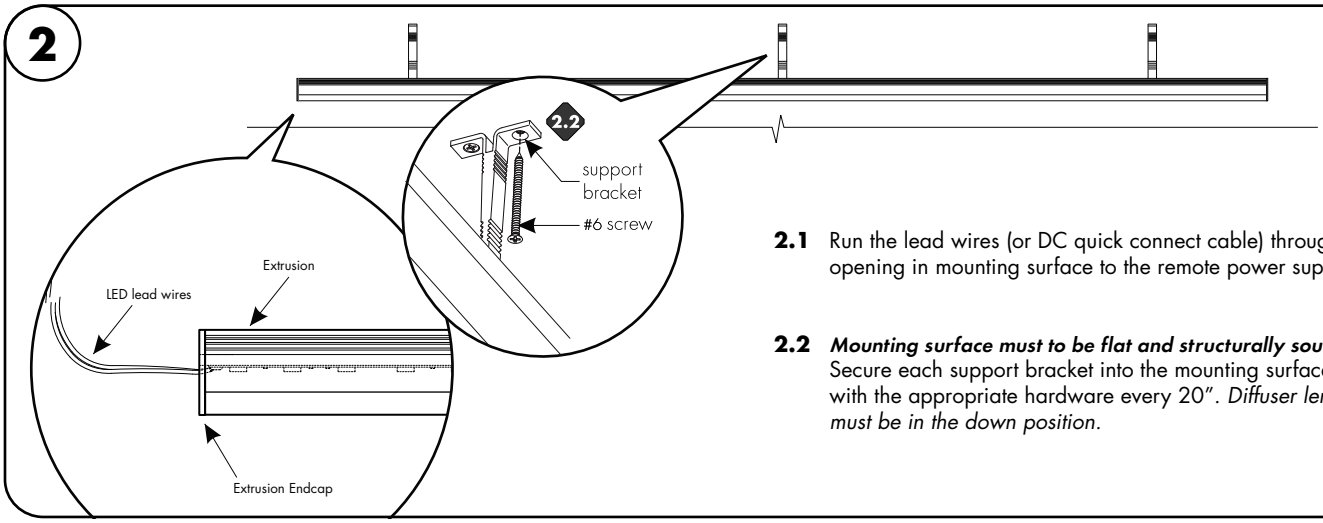

2.1 Run the lead wires (or DC quick connect cable) through opening in mounting surface to the remote power supply.


2.2 ***Mounting surface must to be flat and structurally sound.*** Secure each support bracket into the mounting surface with the appropriate hardware every 20". *Diffuser lens must be in the down position.*

Power Supply

1

Ensure power is off to power supply!

Once the RO extrusion is assembled with all parts and accessories, connect wires from Line LED to appropriate power supply. For more information please refer to power supply and Line LED wiring instructions.

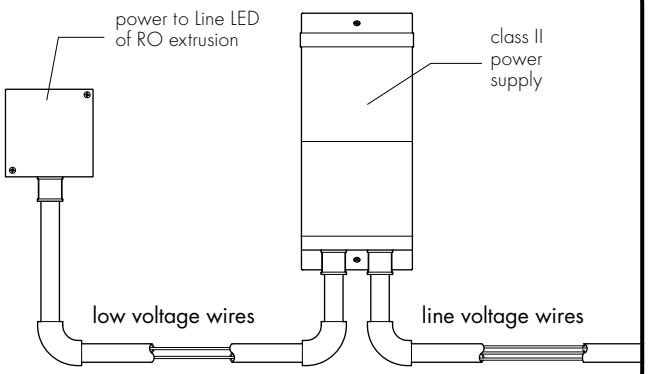

*LUMINII RESERVES THE RIGHTS TO CHANGE SPECIFICATION & INSTRUCTION WITHOUT NOTICE