

ATTO T JACK

PRODUCT OVERVIEW

STANDARD LIGHT ENGINE



KEY FEATURES

- Beam Options: 16 | 23 | 45 | 90
- Light Engine Performance: 94lm | 1.12W
- Movement: 360 Pan | 180 Tilt
- Micro-optics
- Tool-less field changeable optics
- UK Part L1 / L2 (Display) Compliant



OVERVIEW

Atto T Jack is a Constant Current single source LED spotlight that is machined from aerospace grade aluminium 6063-T6 and comes as standard in white, black and brushed aluminium along with three premium brass finishes. It has four site-changeable optics for flexible beam distribution and is fully adjustable with lockable 360° pan and 180° tilt. Our 94lm | 1.12W light engine has a max peak intensity of 794cd. The luminaire is compatible with our Minipoint system that enables a plug and play setup where luminaires can be swapped to suit changing lighting requirements.

PERFORMANCE

	Standard			
	Narrow	Medium	Flood	W. Flood
FWHM	16°	23°	45°	90°
Luminous Flux	94 lm	92 lm	93 lm	69 lm
Peak Intensity	794 cd	359 cd	109 cd	26 cd
CCT	2700K 3000K			
CRI Min.	95 95			
LED Current	0.350 A			
Voltage	3.2 V			
Input Wattage	1.12 W			
Efficacy	83.9 lm/W			
Driver Type	Constant Current Remote			
Class	SELV Class III			

ORDER CODE

Model	Type	Output	CCT	Beam Angle	Finish
ATTT Atto T	MI Minipoint Jack ¹	SO Standard Output	27K 2700K	NR Narrow 16°	WH White
	NMI w/Node Minipoint		30K 3000K	ME Medium 23°	BKA Black Anodised
	SMI w/Surface Minipoint			WD Wide 45°	AL Br. Aluminium
				UW Ultra Wide 90°	RBZ Rubbed Bronze
					BR Br. Brass
					PB Polished Brass

Example code: ATTT-MI-SO-30K-NR-AL

¹ MI type requires separate minipoint mounting point to be ordered
See Drivers, Power Supplies and Accessories sections for further order codes

LIGHT ENGINE SELECTION

This product is available with a single static white light engine option outlined below.

STANDARD
OUTPUT

Our standard output light engines embody Precision's commitment to excellence, delivering high CRI, efficient performance, and clean, well-defined beams.

- High CRI
- Crisp clean beams

LIFETIME & ENVIRONMENTAL

At Precision, we design and engineer our products with longevity in mind. Many of the components that make up our light fixtures are both modular and re-usable, making it possible to service and repair them throughout their life in service. Once our products reach the end of their useful life, it is possible to re-work and renew them in to a new product. We prioritise the use of recyclable materials in both our products and packaging, and encourage our customers to engage responsibly in the correct disposal of any materials we supply.

CIBSE TM65	6.31 Kg/CO2e
CIBSE TM66	2.4
RoHS Compliance	Yes
REACH Compliance	Yes
WEEE Compliance	Yes - Registered Producer
Declare	LBC Red List Approved
Lifetime	L90B10 100,000hrs
Warranty	5 Years

UK PART L	
Part L1A / L1B (Dwellings)	Compliant 164 lm/W ≥75 lm/W source lumens Source lm (184 lm) / Source W (1.12 W)
Part L2A (General)	- ≥95lm/W delivered lumens
Part L2A (Display)	Compliant 164 lm/W ≥80 lm/W source lumens Source lm (184 lm) / Source W (1.12 W)

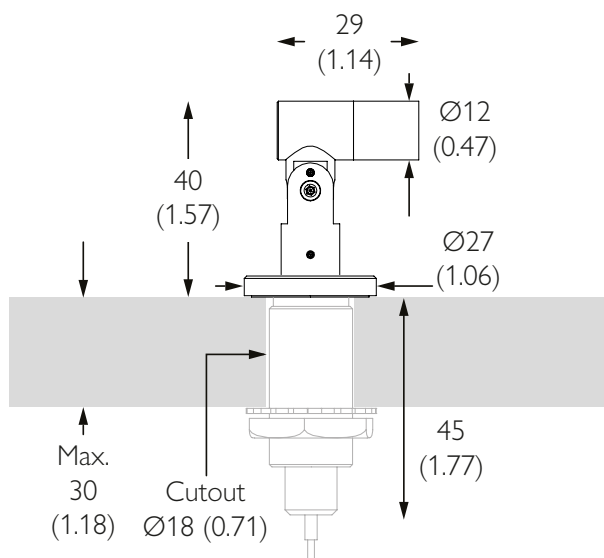
ATTO T JACK

precision
by luminii

DIMENSIONS & FINISHES

STANDARD LIGHT ENGINE

DIMENSIONS



MECHANICAL

Location	IP20 Indoor Dry Location Only	Cutout	ø18mm (0.71") minipoint
Mounting	Minipoints	Ceiling Thickness	30mm (1.18") max
Adjustability	360 Pan 180 Tilt	Product Class	SELV Class III
Lockable	Pan & Tilt	Material	Machined AL 6063-T6 Machined Brass
Accessories	Snoots	Weight	18g 0.04lb

FINISHES



20W | 0-10V | Remote | Constant Current

Input Voltage	230VAC 50/60 Hz
Driver Type	Remote Constant Current
Location	IP20 Indoor Location Only
Dimming Control	0-10V
Min. Dim Level	0.1%
Flicker	IEEE P1789 Compatible No Observable Effect
Wiring Distance	16 AWG - 36m (118') 18 AWG 22m (72')



	All CCT's		L	W	H
Max. Lights	1 to 12 in series	mm	160	41	30
Order Code	PSCC-20-350-A-EL	in	6.3	1.61	1.18

20W | DALI-2 | Remote | Constant Current

Input Voltage	230VAC 50/60 Hz
Driver Type	Remote Constant Current
Location	IP20 Indoor Location Only
Dimming Control	DALI-2
Min. Dim Level	0.1%
Flicker	IEEE P1789 Compatible No Observable Effect
Wiring Distance	16 AWG - 36m (118') 18 AWG 22m (72')



	All CCT's		L	W	H
Max. Lights	1 to 12 in series	mm	160	41	30
Order Code	PSCC-20-350-D-EL	in	6.3	1.61	1.18

30W | 0-10V | Remote | Constant Current

Input Voltage	120-277V 50/60 Hz
Driver Type	Remote Constant Current
Location	IP20 Indoor Location Only
Dimming Control	0-10V
Min. Dim Level	0.1%
Flicker	IEEE P1789 Compatible No Observable Effect
Wiring Distance	16 AWG - 36m (118') 18 AWG 22m (72')



	All CCT's		L	W	H
Max. Lights	1 to 16 in series	mm	348	65	47
Order Code	USCC-30-350-A-EL-ENC	in	13.7	2.56	1.85

30W | DALI-2 | Remote | Constant Current

Input Voltage	120-277V 50/60 Hz
Driver Type	Remote Constant Current
Location	IP20 Indoor Location Only
Dimming Control	DALI-2
Min. Dim Level	0.1%
Flicker	IEEE P1789 Compatible No Observable Effect
Wiring Distance	16 AWG - 36m (118') 18 AWG 22m (72')










	All CCT's		L	W	H
Max. Lights	1 to 16 in series	mm	348	65	47
Order Code	USCC-30-350-D-EL-ENC	in	13.7	2.56	1.85

OUTPUT SCALING

CCT	Output Multiplier	CRI	R9 Typ.	TM-30: Rf	TM-30: Rg	Max Lm
2400K	-	-	-	-	-	-
2700K	1.00	95	65	90	98	94
3000K	1.00	95	65	90	99	94
3500K	-	-	-	-	-	-
4000K	-	-	-	-	-	-

Colour Consistency: 3 SDCM

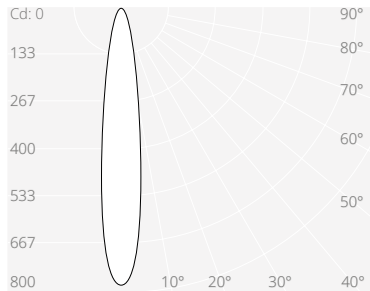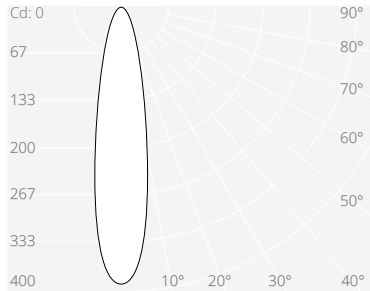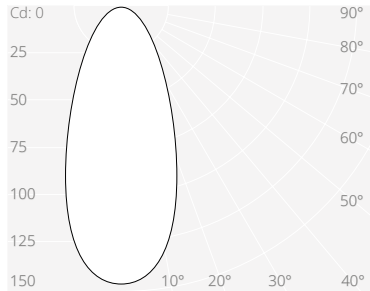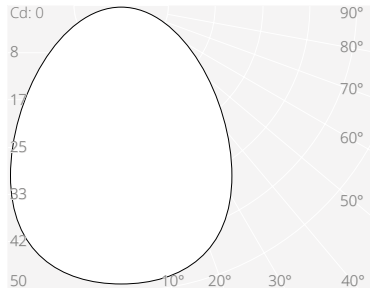PHOTOMETRY

NARROW				<table><tr><td>0.28m</td><td>794lx</td><td>88fc</td><td>0.8'</td></tr><tr><td>1m</td><td></td><td></td><td>3'</td></tr><tr><td>0.56m</td><td>199lx</td><td>22fc</td><td>1.7'</td></tr><tr><td>2m</td><td></td><td></td><td>6'</td></tr><tr><td>0.84m</td><td>88lx</td><td>10fc</td><td>2.5'</td></tr><tr><td>3m</td><td></td><td></td><td>9'</td></tr><tr><td>1.12m</td><td>50lx</td><td>6fc</td><td>3.4'</td></tr><tr><td>4m</td><td></td><td></td><td>12'</td></tr><tr><td>1.41m</td><td>32lx</td><td>4fc</td><td>4.2'</td></tr><tr><td>5m</td><td></td><td></td><td>15'</td></tr><tr><td></td><td></td><td>2fc</td><td>5.1'</td></tr><tr><td></td><td></td><td></td><td>18'</td></tr></table>	0.28m	794lx	88fc	0.8'	1m			3'	0.56m	199lx	22fc	1.7'	2m			6'	0.84m	88lx	10fc	2.5'	3m			9'	1.12m	50lx	6fc	3.4'	4m			12'	1.41m	32lx	4fc	4.2'	5m			15'			2fc	5.1'				18'
0.28m	794lx	88fc	0.8'																																																	
1m			3'																																																	
0.56m	199lx	22fc	1.7'																																																	
2m			6'																																																	
0.84m	88lx	10fc	2.5'																																																	
3m			9'																																																	
1.12m	50lx	6fc	3.4'																																																	
4m			12'																																																	
1.41m	32lx	4fc	4.2'																																																	
5m			15'																																																	
		2fc	5.1'																																																	
			18'																																																	
MEDIUM				<table><tr><td>0.41m</td><td>359lx</td><td>40fc</td><td>1.2'</td></tr><tr><td>1m</td><td></td><td></td><td>3'</td></tr><tr><td>0.81m</td><td>90lx</td><td>10fc</td><td>2.4'</td></tr><tr><td>2m</td><td></td><td></td><td>6'</td></tr><tr><td>1.22m</td><td>40lx</td><td>4fc</td><td>3.7'</td></tr><tr><td>3m</td><td></td><td></td><td>9'</td></tr><tr><td>1.63m</td><td>22lx</td><td>2fc</td><td>4.9'</td></tr><tr><td>4m</td><td></td><td></td><td>12'</td></tr><tr><td>2.03m</td><td>14lx</td><td>2fc</td><td>6.1'</td></tr><tr><td>5m</td><td></td><td></td><td>15'</td></tr><tr><td></td><td></td><td>1fc</td><td>7.3'</td></tr><tr><td></td><td></td><td></td><td>18'</td></tr></table>	0.41m	359lx	40fc	1.2'	1m			3'	0.81m	90lx	10fc	2.4'	2m			6'	1.22m	40lx	4fc	3.7'	3m			9'	1.63m	22lx	2fc	4.9'	4m			12'	2.03m	14lx	2fc	6.1'	5m			15'			1fc	7.3'				18'
0.41m	359lx	40fc	1.2'																																																	
1m			3'																																																	
0.81m	90lx	10fc	2.4'																																																	
2m			6'																																																	
1.22m	40lx	4fc	3.7'																																																	
3m			9'																																																	
1.63m	22lx	2fc	4.9'																																																	
4m			12'																																																	
2.03m	14lx	2fc	6.1'																																																	
5m			15'																																																	
		1fc	7.3'																																																	
			18'																																																	
FLOOD				<table><tr><td>0.83m</td><td>109lx</td><td>12fc</td><td>2.5'</td></tr><tr><td>1m</td><td></td><td></td><td>3'</td></tr><tr><td>1.66m</td><td>27lx</td><td>3fc</td><td>5.0'</td></tr><tr><td>2m</td><td></td><td></td><td>6'</td></tr><tr><td>2.49m</td><td>12lx</td><td>1fc</td><td>7.5'</td></tr><tr><td>3m</td><td></td><td></td><td>9'</td></tr><tr><td>3.31m</td><td>7lx</td><td>1fc</td><td>9.9'</td></tr><tr><td>4m</td><td></td><td></td><td>12'</td></tr><tr><td>4.14m</td><td>4lx</td><td>0fc</td><td>12.4'</td></tr><tr><td>5m</td><td></td><td></td><td>15'</td></tr><tr><td></td><td></td><td>0fc</td><td>14.9'</td></tr><tr><td></td><td></td><td></td><td>18'</td></tr></table>	0.83m	109lx	12fc	2.5'	1m			3'	1.66m	27lx	3fc	5.0'	2m			6'	2.49m	12lx	1fc	7.5'	3m			9'	3.31m	7lx	1fc	9.9'	4m			12'	4.14m	4lx	0fc	12.4'	5m			15'			0fc	14.9'				18'
0.83m	109lx	12fc	2.5'																																																	
1m			3'																																																	
1.66m	27lx	3fc	5.0'																																																	
2m			6'																																																	
2.49m	12lx	1fc	7.5'																																																	
3m			9'																																																	
3.31m	7lx	1fc	9.9'																																																	
4m			12'																																																	
4.14m	4lx	0fc	12.4'																																																	
5m			15'																																																	
		0fc	14.9'																																																	
			18'																																																	
WIDE FLOOD				<table><tr><td>2.00m</td><td>26lx</td><td>3fc</td><td>6.0'</td></tr><tr><td>1m</td><td></td><td></td><td>3'</td></tr><tr><td>4.00m</td><td>7lx</td><td>1fc</td><td>12.0'</td></tr><tr><td>2m</td><td></td><td></td><td>6'</td></tr><tr><td>6.00m</td><td>3lx</td><td>0fc</td><td>18.0'</td></tr><tr><td>3m</td><td></td><td></td><td>9'</td></tr><tr><td>8.00m</td><td>2lx</td><td>0fc</td><td>24.0'</td></tr><tr><td>4m</td><td></td><td></td><td>30.0'</td></tr><tr><td>10.00m</td><td>1lx</td><td>0fc</td><td>36.0'</td></tr><tr><td>5m</td><td></td><td></td><td></td></tr></table>	2.00m	26lx	3fc	6.0'	1m			3'	4.00m	7lx	1fc	12.0'	2m			6'	6.00m	3lx	0fc	18.0'	3m			9'	8.00m	2lx	0fc	24.0'	4m			30.0'	10.00m	1lx	0fc	36.0'	5m											
2.00m	26lx	3fc	6.0'																																																	
1m			3'																																																	
4.00m	7lx	1fc	12.0'																																																	
2m			6'																																																	
6.00m	3lx	0fc	18.0'																																																	
3m			9'																																																	
8.00m	2lx	0fc	24.0'																																																	
4m			30.0'																																																	
10.00m	1lx	0fc	36.0'																																																	
5m																																																				

OPTICS

There are 4 interchangeable optics

Optic	Optic	Optic	Optic
			
Narrow TIR Optic FWHM 16 deg Order Code 760-16	Medium TIR Optic FWHM 23 deg Order Code 760-23	Wide TIR Optic FWHM 45 deg Order Code 760-45	Ultra Wide TIR Optic FWHM 90 deg Order Code 760-90

ACCESSORIES

This product does not have a standard accessory holder, if required please contact us for modification opportunities.

MINIPOINT JACK SYSTEM


MOUNTING OPTIONS

MOUNTING OPTIONS

NODE MINIPOINT

For mounting into cabinetry

MINIPOINT CODE	FINISH
770-M-A-DC-AL	Brushed Aluminium
770-M-A-DC-WH	White RAL 9010
770-M-A-DC-EBA	Black RAL 9005
770-M-A-DC-AL	Rubbed Bronze
770-M-A-DC-AL	Polished Brass
770-M-A-DC-AL	Brushed Brass

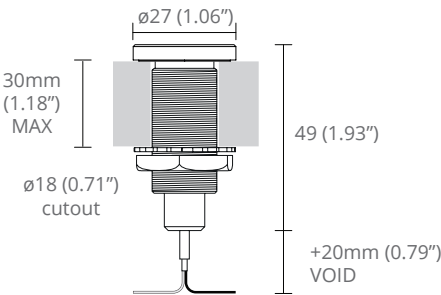

MINIPOINT PLUG

For closing an open circuit / unused minipoint

MINIPOINT CODE	FINISH
770-BPA-AL	Brushed Aluminium
770-BPA-WH	White RAL 9010
770-BPA-EBA	Black RAL 9005
770-BPA-RB	Rubbed Bronze
770-BPA-PB	Polished Brass
770-BPA-SB	Brushed Brass

