# EVO S16

PRODUCT OVERVIEW SHORT SNOOT | GLARE GUARD | LONG SNOOT

INTENSE LIGHT ENGINE



## KEY FEATURES

Beam Options: 6 | 10 | 16 | 30 | 50
Light Engine Performance: 653lm | 8.40W
Movement: 360 Pan | 180 Tilt
Tool-less field changeable optics
Ultra narrow high intensity beams
Interchangeable accessories
UK Part L1 / L2 (Display) Compliant

## OVERVIEW

Evo S16 is a Constant Voltage single source LED spotlight that is machined from aerospace grade aluminium 6063-T6 and comes as standard in white, black and brushed aluminium finishes. It has five site-changeable optics for flexible beam distribution and fully lockable bearing aided pan and tilt. Our 653lm | 8.40W light engine has a max peak intensity of 28223cd. There are 3 snoot options, Short, Glare Guard and Long. An accessory holder is available separately that can accommodate 55mm (2.16") lenses and louvers. The Jack Plug is compatible with Precision Lighting's 24V Jack systems. The onboard 24V DC driver ensures overcurrent protection and is not polarity sensitive. An external AC to 24V DC power supply is required.

## PERFORMANCE

| | Intense | | | | |
|---|---|---|---|---|---|
| | U. Narrow | Narrow | Medium | Flood | W. Flood |
| FWHM | 6° | 10° | 16° | 30° | 50° |
| Luminous Flux | 650 lm | 653 lm | 623 lm | 637 lm | 605 lm |
| Peak Intensity | 28223 cd | 15476 cd | 5671 cd | 1652 cd | 633 cd |
| CCT | 2700K \| 3000K \| 3500K \| 4000K | | | | |
| CRI Min. | 92 \| 92 \| 92 \| 90 | | | | |
| LED Current | 0.700 A | | | | |
| Voltage | 24 V | | | | |
| Input Wattage | 9 W | | | | |
| Efficacy | 77.7 lm/W | | | | |
| Driver Type | Constant Voltage \| Remote AC to 24VDC | | | | |
| Class | SELV \| Class III | | | | |

## ORDER CODE

| Model | Type | Shape | Output | CCT | Beam Angle | Finish |
|---|---|---|---|---|---|---|
| **EVOS16** *Evo S16* | **MJ** *No mounting* [2] | **SN** *Short Snoot* | **IO** *Intense Output* | **27K** *2700K* | **UN** *Ultra Narrow 6°* | **WH** *White* |
| | **FMJ** *Flat Monopoint* | **LN** *Long Snoot* | | **30K** *3000K* | **NR** *Narrow 10°* | **BK** *Black* |
| | **SMJ** *Surface Monopoint* | **GL** *Glare Guard* | | **35K** *3500K* | **ME** *Medium 16°* | **AL** *Br. Aluminium* |
| | **NMJ** *Node Monopoint* | | | **40K** *4000K* | **FL** *Flood 30°* | |
| | **TMJ** *Trimless Monopoint* | | | | **WF** *Wide Flood 50°* | |
| | **BT** *Basis Track* [1] | | | | | |
| | **BTW** *Basis Track Wall* [1] | | | | | |

**Example code:** EVOS16-MJ-SN-IO-27K-UN-WH

*[1] BT and BTW are available for AL and RBZ only [2] MJ requires the specification of a separate mounting point. [3] Evo S is not available in RBZ, BR or PB finishes*

*See Drivers, Power Supplies and Accessories sections for further order codes*



RCLPLLSALES@LUMINII.COM
LUMINII.COM | PRECISIONLIGHTING.CO.UK

# EVO S16



## LIGHT ENGINE SELECTION

This product is available with our Intense static white light engine option outlined below.

▸ intense ◂

Precisions signature intense light engines offer tight, surgical beams combined with the highest peak intensity values available.

- Ultra-tight beams
- High Peak Cd

## LIFETIME & ENVIRONMENTAL

At Precision, we design and engineer our products with longevity in mind. Many of the components that make up our light fixtures are both modular and re-usable, making it possible to service and repair them throughout their life in service. Once our products reach the end of their useful life, it is possible to re-work and renew them in to a new product. We prioritise the use of recyclable materials in both our products and packaging, and encourage our customers to engage responsibly in the correct disposal of any materials we supply.

| | |
|---|---|
| **CIBSE TM65** | 17.43 Kg/CO2e |
| **CIBSE TM66** | 2.4 |
| **RoHS Compliance** | Yes |
| **REACH Compliance** | Yes |
| **WEEE Compliance** | Yes - Registered Producer |
| **Declare** | Declared |
| **Lifetime** | L90B10 100,000hrs |
| **Warranty** | 5 Years |

| **UK PART L** | |
|---|---|
| **Part L1A / L1B (Dwellings)**<br>*≥75 lm/W source lumens* | *Compliant 105 lm/W*<br>*Source lm (882 lm) / Source W (8.40 W)* |
| **Part L2A (General)**<br>*≥95lm/W delivered lumens* | - |
| **Part L2A (Display)**<br>*≥80 lm/W source lumens* | *Compliant 105 lm/W*<br>*Source lm (882 lm) / Source W (8.40 W)* |




RCLPLLSALES@LUMINII.COM
LUMINII.COM | PRECISIONLIGHTING.CO.UK


# EVO S16




## DIMENSIONS

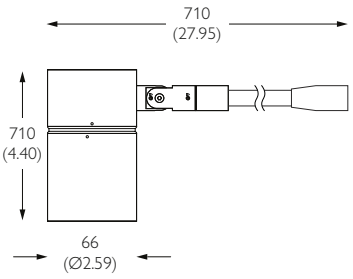


EVO 16
SHORT SNOOT

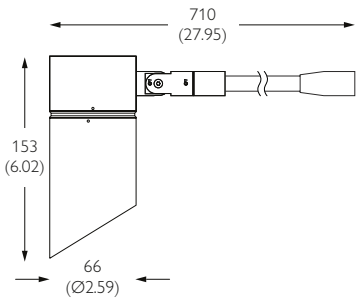


EVO 16
GLARE GUARD




EVO 16
LONG SNOOT

## MECHANICAL

| | | | |
|---|---|---|---|
| **Location** | IP20 \| Indoor Dry Location Only | **Cutout** | N/A |
| **Mounting** | Basis Track \| 24V Monopoints | **Ceiling Thickness** | N/A |
| **Adjustability** | 360 Pan \| 180 Tilt | **Product Class** | SELV \| Class III |
| **Lockable** | Pan & Tilt | **Material** | Machined AL 6063-T6 |
| **Accessories** | Snoots \| Louver \| Lenses | **Weight** | 397g \| 0.88lb |

## FINISHES



White | Black | Brushed Aluminium



RCLPLLSALES@LUMINII.COM
LUMINII.COM | PRECISIONLIGHTING.CO.UK

# EVO S16

DRIVERS & POWER SUPPLIES – UK, EU, MIDDLE EAST, ASIA, PACIFIC

INTENSE LIGHT ENGINE

## 100W | 0-10V | Remote | Constant Voltage

| | |
|---|---|
| **Input Voltage** | 230VAC \| 50/60 Hz |
| **Driver Type** | Remote \| Constant Voltage |
| **Location** | IP20 \| Indoor Location Only |
| **Dimming Control** | 0-10V |
| **Min. Dim Level** | 1.0% |
| **Flicker** | IEEE P1789 Compatible \| No Observable Effect |
| **Wiring Distance** | 12 AWG - 10m (33') |




| | All CCT's | | L | W | H |
|---|---|---|---|---|---|
| **Max. Lights** | 1 to 9 | **mm** | 240 | 50 | 34 |
| **Order Code** | PSCV-100-24-A-OS | **in** | 9.45 | 1.97 | 1.34 |

## 130W | 0-10V | Remote | Constant Voltage

| | |
|---|---|
| **Input Voltage** | 230VAC \| 50/60 Hz |
| **Driver Type** | Remote \| Constant Voltage |
| **Location** | IP20 \| Indoor Location Only |
| **Dimming Control** | 0-10V |
| **Min. Dim Level** | 1.0% |
| **Flicker** | IEEE P1789 Compatible \| No Observable Effect |
| **Wiring Distance** | 12 AWG - 10m (33') |




| | All CCT's | | L | W | H |
|---|---|---|---|---|---|
| **Max. Lights** | 1 to 12 | **mm** | 240 | 63 | 37 |
| **Order Code** | PSCV-130-24-A-OS | **in** | 9.45 | 2.48 | 1.46 |

## 100W | DALI-2 | Remote | Constant Voltage

| | |
|---|---|
| **Input Voltage** | 230VAC \| 50/60 Hz |
| **Driver Type** | Remote \| Constant Voltage |
| **Location** | IP20 \| Indoor Location Only |
| **Dimming Control** | DALI-2 |
| **Min. Dim Level** | 1.0% |
| **Flicker** | IEEE P1789 Compatible \| No Observable Effect |
| **Wiring Distance** | 12 AWG - 10m (33') |




| | All CCT's | | L | W | H |
|---|---|---|---|---|---|
| **Max. Lights** | 1 to 10 | **mm** | 388 | 42 | 30 |
| **Order Code** | PSCV-100-24-D-EL | **in** | 15.28 | 1.65 | 1.18 |

## INSTALLATION

To ensure consistent dimming performance when using monopoints, it is recommended to use a 12 AWG / 4 mm² cable. The increased cross-sectional area of 12 AWG / 4 mm² cable minimizes voltage drop between lights, maintaining consistent brightness levels across the entire circuit, especially when dimmed.

Minimize Total Circuit Length:

- To reduce voltage drop, the total length of the lighting circuit should be kept as short as possible.

Close the Loop:

- Arranging the circuit in a U-shape, L-shape, or ring configuration (by joining the first and last lights) helps to balance voltage distribution.
- This technique effectively reduces voltage variation between lights, promoting uniform brightness.

Wiring in a Ring:

- Creating a ring circuit allows current to flow from both ends, significantly reducing the impact of voltage drop along the line.
- This approach is especially beneficial in larger installations or where long cable runs are unavoidable.

Positioning the Power Supply:

- Place the power supply as centrally as possible to reduce voltage drop to the furthest points.
- Consider using multiple supplies for larger installations to maintain consistent voltage.

# EVO S16

DRIVERS & POWER SUPPLIES – NORTH AMERICA

INTENSE LIGHT ENGINE

## 100W | 0-10V | Remote | Constant Voltage

| | |
|---|---|
| **Input Voltage** | 120V AC Only \| 50/60 Hz |
| **Driver Type** | Remote \| Constant Voltage |
| **Location** | IP20 \| Indoor Location Only |
| **Dimming Control** | 0-10V |
| **Min. Dim Level** | 1.0% |
| **Flicker** | IEEE P1789 Compatible \| No Observable Effect |
| **Wiring Distance** | 12 AWG - 10m (33') |




| | All CCT's | | L | W | H |
|---|---|---|---|---|---|
| **Max. Lights** | 1 to 9 | **mm** | 550.0 | 65.0 | 57.0 |
| **Order Code** | USCV-100-24-A-MW-ENC | **in** | 21.65 | 2.56 | 2.24 |

## 96W | Phase | Remote | Constant Voltage

| | |
|---|---|
| **Input Voltage** | 120V AC Only \| 50/60 Hz |
| **Driver Type** | Remote \| Constant Voltage |
| **Location** | IP20 \| Indoor Location Only |
| **Dimming Control** | Phase |
| **Min. Dim Level** | 1.0% |
| **Flicker** | IEEE P1789 Compatible \| No Observable Effect |
| **Wiring Distance** | 12 AWG - 10m (33') |




| | All CCT's | | L | W | H |
|---|---|---|---|---|---|
| **Max. Lights** | 1 to 8 | **mm** | 380.0 | 77.0 | 57.0 |
| **Order Code** | USCV-96-24-P-LU | **in** | 14.96 | 3.03 | 2.24 |

## 100W | DALI-2 | Remote | Constant Voltage

| | |
|---|---|
| **Input Voltage** | 120-277V \| 50/60 Hz |
| **Driver Type** | Remote \| Constant Voltage |
| **Location** | IP20 \| Indoor Location Only |
| **Dimming Control** | DALI-2 |
| **Min. Dim Level** | 1.0% |
| **Flicker** | IEEE P1789 Compatible \| No Observable Effect |
| **Wiring Distance** | 12 AWG - 10m (33') |




| | All CCT's | | L | W | H |
|---|---|---|---|---|---|
| **Max. Lights** | 1 to 9 | **mm** | 550 | 65 | 57 |
| **Order Code** | USCV-100-24-D-EL-ENC | **in** | 21.65 | 2.56 | 2.24 |

## INSTALLATION

To ensure consistent dimming performance when using monopoints, it is recommended to use a 12 AWG / 4 mm² cable. The increased cross-sectional area of 12 AWG / 4 mm² cable minimizes voltage drop between lights, maintaining consistent brightness levels across the entire circuit, especially when dimmed.

Minimize Total Circuit Length:

- To reduce voltage drop, the total length of the lighting circuit should be kept as short as possible.

Close the Loop:

- Arranging the circuit in a U-shape, L-shape, or ring configuration (by joining the first and last lights) helps to balance voltage distribution.
- This technique effectively reduces voltage variation between lights, promoting uniform brightness.

Wiring in a Ring:

- Creating a ring circuit allows current to flow from both ends, significantly reducing the impact of voltage drop along the line.
- This approach is especially beneficial in larger installations or where long cable runs are unavoidable.

Positioning the Power Supply:

- Place the power supply as centrally as possible to reduce voltage drop to the furthest points.
- Consider using multiple supplies for larger installations to maintain consistent voltage.

# EVO S16

PHOTOMETRY

precision by luminii

INTENSE LIGHT ENGINE

## OUTPUT SCALING


| CCT | Output Multiplier | CRI | R9 Typ. | TM-30: Rf | TM-30: Rg | Max Lm |
|---|---|---|---|---|---|---|
| 2400K | - | - | - | - | - | - |
| 2700K | 0.90 | 92 | 50 | 90 | 99 | 588 |
| 3000K | 1.00 | 92 | 50 | 90 | 99 | 653 |
| 3500K | 1.00 | 92 | 50 | 90 | 99 | 653 |
| 4000K | 1.00 | 90 | 50 | 90 | 98 | 653 |


Colour Consistency: 2 SDCM at 2700K / 3000K, 3DCM at 3500 / 4000K

## PHOTOMETRY

### ULTRA NARROW

| | |
|---|---|
| FWHM | 6° |
| Delivered Flux | 650 lm |
| Peak Intensity | 28223 cd |



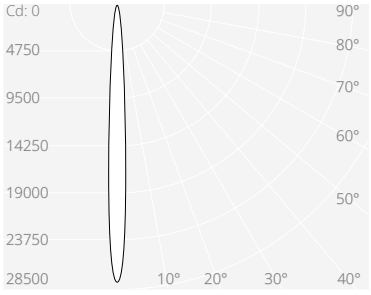








### NARROW

| | |
|---|---|
| FWHM | 10° |
| Delivered Flux | 653 lm |
| Peak Intensity | 15476 cd |




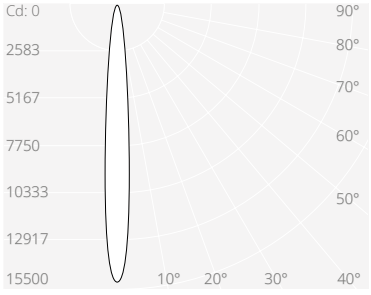


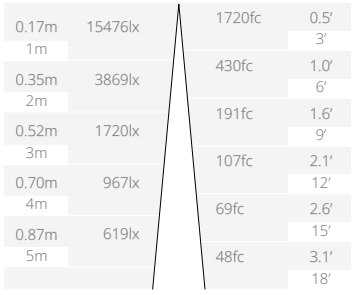




### MEDIUM

| | |
|---|---|
| FWHM | 16° |
| Delivered Flux | 623 lm |
| Peak Intensity | 5671 cd |

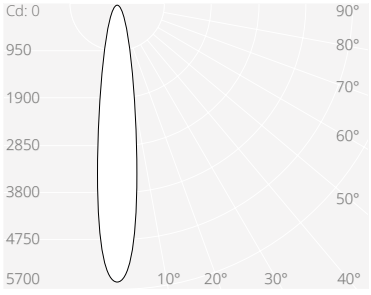


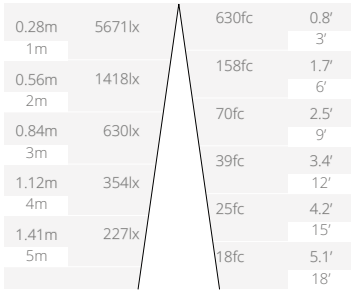







### FLOOD

| | |
|---|---|
| FWHM | 30° |
| Delivered Flux | 637 lm |
| Peak Intensity | 1652 cd |

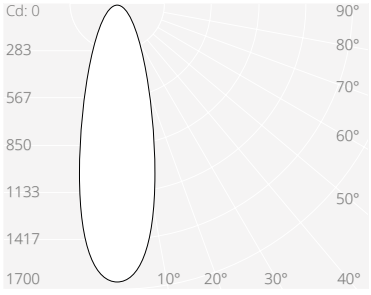


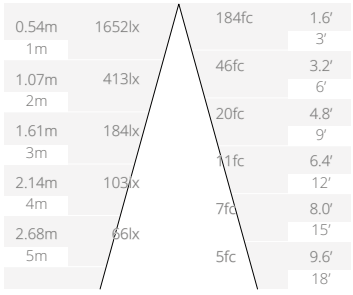







### WIDE FLOOD

| | |
|---|---|
| FWHM | 50° |
| Delivered Flux | 605 lm |
| Peak Intensity | 633 cd |

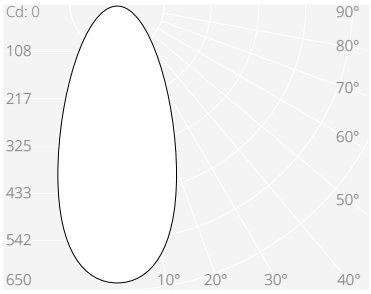

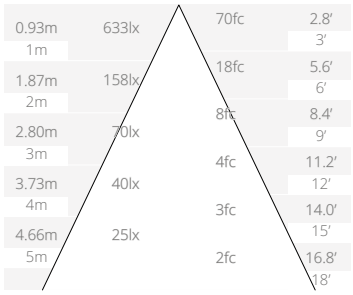









RCLPLLSALES@LUMINII.COM
LUMINII.COM | PRECISIONLIGHTING.CO.UK

# EVO S16








## OPTICS


There are 5 tool-less interchangeable optics, cross reference the text on the optic disc for beam.


| Optic Disc | Optic Disc | Optic Disc | Optic Disc | Optic Disc |
|---|---|---|---|---|
|  |  |  |  |  |
| **Ultra Narrow Disc** | **Narrow Disc** | **Medium Disc** | **Flood Disc** | **Wide Flood Disc** |
| FWHM 6 deg | FWHM 10 deg | FWHM 16 deg | FWHM 30 deg | FWHM 50 deg |
| **Order Code** | **Order Code** | **Order Code** | **Order Code** | **Order Code** |
| **931-01** | **931-02** | **931-03** | **931-04** | **931-05** |

## ACCESSORIES

This product can hold 2 x accessories using the double accessory holder. The kick reflector must be paired with the glare guard snoot. Accessories are pre-installed unless otherwise requested.

| Accessory Holder | Accessory Holder | Glare Control | Beam Shaping | Beam Shaping |
|---|---|---|---|---|
|  |  |  |  |  |
| **Double Reflector Holder** | **Double Accessory Holder** | **Honeycomb Louver** | **Softening Lens** | **Linear Lens** |
| W63xH54mm \| W2.48xH2.13" | W63xH14mm \| W2.48xH0.55" | W55xH3.2mm \| W2.17xH0.13" | W55xH3.2mm \| W2.17xH0.13" | W55xH3.2mm \| W2.17xH0.13" |
| **Order Code** | **Order Code** | **Order Code** | **Order Code** | **Order Code** |
| **255-BK** | **254-BK** | **995-55-BK** | **991-55** | **992-55** |

| Colour Change | Colour Change |
|---|---|
|  |  |
| **1/4 CTO** | **Custom Colour Filter** |
| W55xH1.8mm \| W2.17xH0.07" | W55xH1.8mm \| W2.17xH0.07" |
| **Order Code** | **Order Code** |
| **997-1/4CTO-55** | **Contact Sales Rep** |

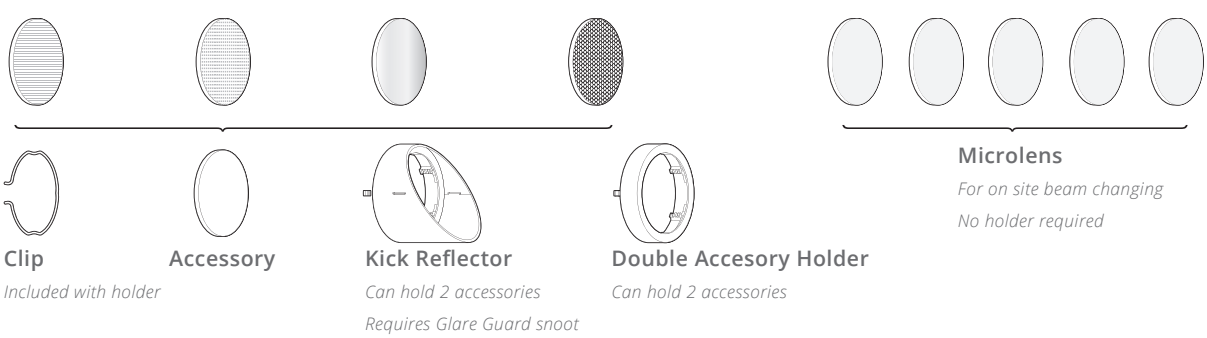





RCLPLLSALES@LUMINII.COM
LUMINII.COM | PRECISIONLIGHTING.CO.UK


## MOUNTING OPTIONS

## BT & BTW - BASIS TRACK

For use with Precision Lighting Basis Track

| ADAPTOR CODE | FINISH |
|---|---|
| BT-01-AL | Brushed Aluminium |
| BT-01-RB | Rubbed Bronze |
| BTW-01-AL | Brushed Aluminium |
| BTW-01-RB | Rubbed Bronze |

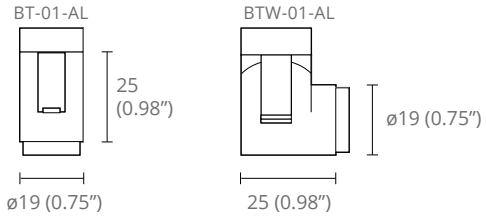

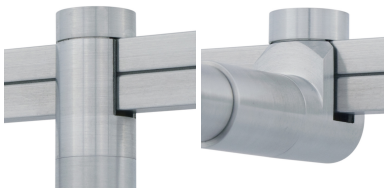
## MPZ - SURFACE MONOPOINT

For blind mounting on solid surfaces

| MONOPOINT CODE | FINISH |
|---|---|
| MPZ-01-AL | Brushed Aluminium |
| MPZ-01-WH | White RAL 9010 |
| MPZ-01-BK | Black RAL 9005 |
| MPZ-01-RB | Rubbed Bronze |
| MPZ-01-PB | Polished Brass |
| MPZ-01-SB | Brushed Brass |



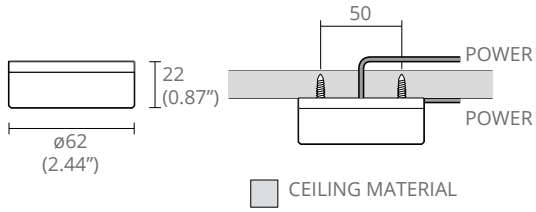



## MPS - TRIMLESS MONOPOINT

For use with plasterboard / sheetrock
*Note: Canopy not standard, for non-trimless install.*

| MONOPOINT CODE | FINISH |
|---|---|
| MPS-01-AL | Brushed Aluminium |

| CANOPY CODE | FINISH |
|---|---|
| MPS-02-AL | Brushed Aluminium |
| MPS-02-BK | Black RAL 9005 |
| MPS-02-WH | White RAL 9010 |

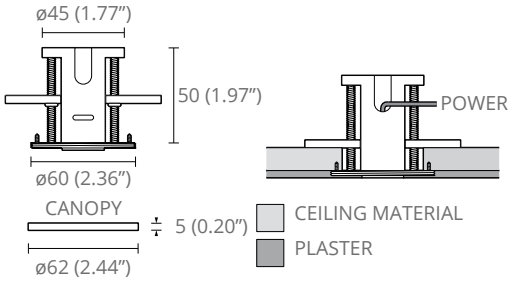





## MPY - NODE MONOPOINT

For use in cabinetry
*Note: rear access required after install*

| MONOPOINT CODE | FINISH |
|---|---|
| MPY-05-AL | Brushed Aluminium |
| MPY-05-WH | White RAL 9010 |
| MPY-05-BK | Black RAL 9005 |
| MPY-05-RB | Rubbed Bronze |
| MPY-05-PB | Polished Brass |
| MPY-05-SB | Brushed Brass |

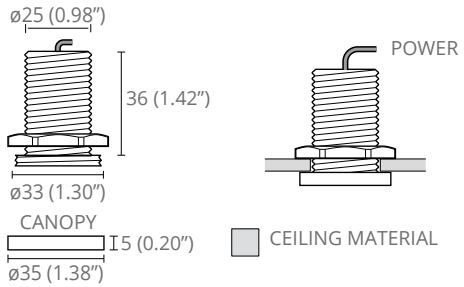




## MPX - FLAT MONOPOINT

For use with most mounting surfaces
*Note: wiring void required*

| MONOPOINT CODE | FINISH |
|---|---|
| MPX-02-AL | Brushed Aluminium |
| MPX-02-WH | White RAL 9010 |
| MPX-02-BK | Black RAL 9005 |
| MPX-02-RB | Rubbed Bronze |
| MPX-01-PB | Polished Brass |
| MPX-01-SB | Brushed Brass |

