
BMC Basics Medium Channel | Contractor Grade Extruded aluminum profile

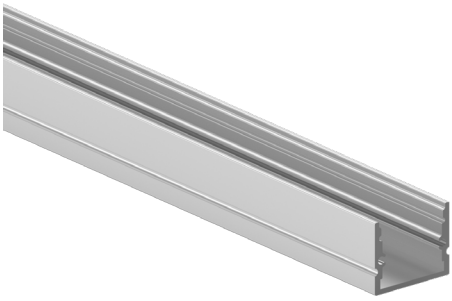

Features

Basics Contractor-Grade Kilo extrusions compatible with Basics LED strips.


Finish
Silver anodized Channel, Silver anodized endcaps


Diffuser Lens
Polycarbonate, snap-in-place, UV resistant

Mounting
Fixed Clip Mounting Bracket

Warranty
5 Years

Product Dimensions

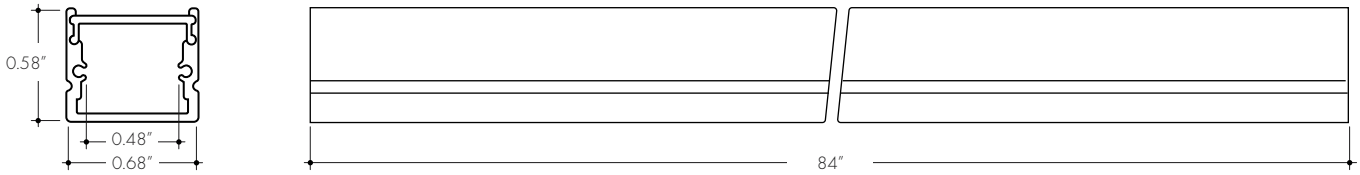

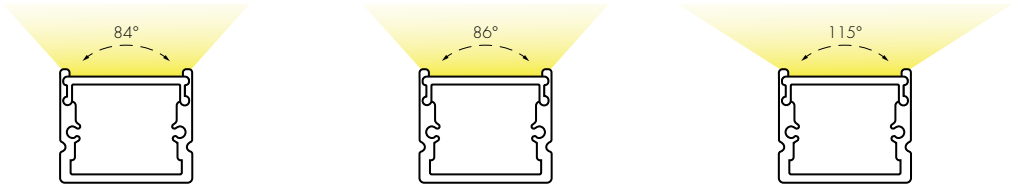

Clear Lens | Half Frosted Lens | Frosted Lens

INCLUDED MOUNTING ACCESSORIES

EXTRUSION LENGTH	FIXED CLIP	ADJUSTABLE	END CAP (PAIR)
84″	6	6	1

Each pair of endcaps includes 1x H0 (no wire feed hole) and 1x H1 (with hole) where applicable. Additional endcaps and mounting clips are available for purchase.

TRANSMISSION PERCENTAGE
(COMPARED TO LED TAPE WITHOUT CHANNEL)

LENS	TRANSMISSION %
Clear	65%
Half Frosted	58%
Frosted	44%

See LED tape spec sheet for lens dotting characteristics & compatibility
Use complete Dotting Chart Tool online for more dotting information (Link)

Ordering code


MODEL		LENGTH		LENS		MOUNTING[2]		FINISH
	-		-		-		-	
BMC - Basics Medium Channel[1]		84 - 84″		C - Clear HF - Half Frosted F - Frosted		FC - Fixed Clip A - Adjustable		SA - Silver Anodized

1 - End Caps are included with channel, one of H0 (no hole) and one of H1 (with hole). Order additional End Caps as necessary.
2 - Mounting Clips are included with channel. Refer to chart above for provided mounting clip quantities. Order additional Mounting Clips as necessary.


Accessories

All Channels come with a specified set of Mounting Clips and End Caps, see Ordering Code for details. Order additional Mounting Clips and End Caps as necessary.


EC-BMC-H0-SA
Silver Anodized End Cap




EC-BMC-H1-SA
Silver Anodized End Cap with powerfeed opening



MB-BMSC-SS
Fixed Clip
-FC





MB-BMSC-A-SS
Adjustable Clip
-A

