



## Features

Basics Contractor-Grade recessed extrusions compatible with Basics LED strips.

### Finish

Silver anodized Channel

### Mounting

Multiple mounting clip options ordered separately






### Diffuser Lens

Polycarbonate, snap-in-place, UV resistant

### Warranty

5 Years

## Product Dimensions

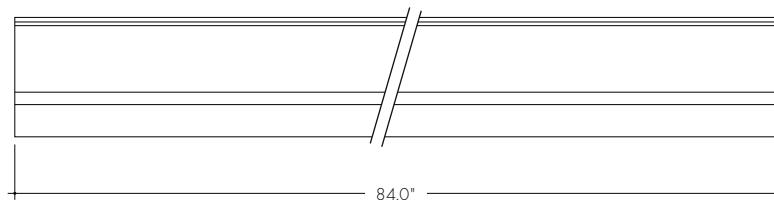

### INCLUDED MOUNTING ACCESSORIES

EXTRUSION LENGTH	MOUNTING SCREWS	END CAP (PAIR)
84"	6	1

Each pair of endcaps includes 1x H0 (no wire feed hole) and 1x H1 (with hole) where applicable. Additional endcaps and mounting clips are available for purchase.

### TRANSMISSION PERCENTAGE (COMPARED TO LED TAPE WITHOUT CHANNEL)

LENS	TRANSMISSION %
Clear	65%
Half Frosted	58%
Frosted	44%

See LED tape spec sheet for lens dotting characteristics & compatibility  
Use complete Dotting Chart Tool online for more dotting information ([Link](#))

## Ordering code

MODEL	LENGTH	LENS	MOUNTING <sup>2</sup>	FINISH
<input type="text"/>	<input type="text"/> - <input type="text"/>	<input type="text"/> - <input type="text"/>	<input type="text"/> - <input type="text"/>	<input type="text"/>

BRC - Basics Recessed Channel<sup>1</sup>

84 - 84"

C - Clear  
HF - Half Frosted  
F - Frosted

DS - Direct to Surface Screw Mount

SA - Silver Anodized


1 - End Caps are included with channel, one of H0 (no hole) and one of H1 (with hole). Order additional End Caps as necessary.  
2 - Mount Basics Recessed Channel directly to stud using flat head screws (by others), every 16 inches.

## Accessories

All Channels come with a specified set of Mounting Clips and End Caps, see Ordering Code for details. Order additional Mounting Clips and End Caps as necessary.

### EC-BRC-H0-SA

Silver Anodized End Cap



### EC-BRC-H1-SA

Silver Anodized End Cap with powerfeed opening

