BRC Basics Recessed Channel

Contractor Grade Extruded aluminum profile

basics by luminii



Features

Basics Contractor-Grade recessed extrusions compatible with Basics LED strips.


Finish
Silver anodized Channel, Silver anodized endcaps


Diffuser Lens
Polycarbonate, snap-in-place, UV resistant

Mounting
Multiple mounting clip options ordered separately

Warranty
5 Years

Product Dimensions

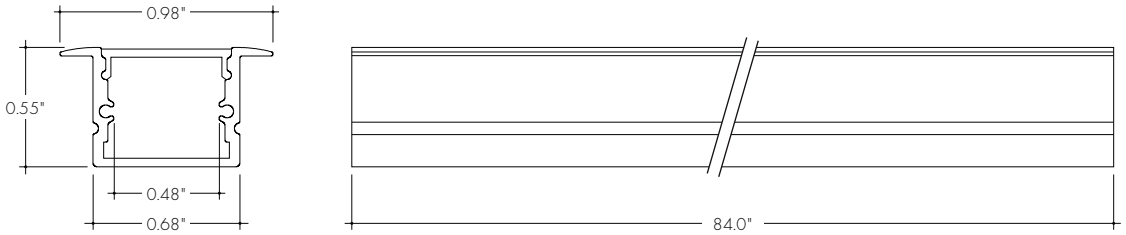

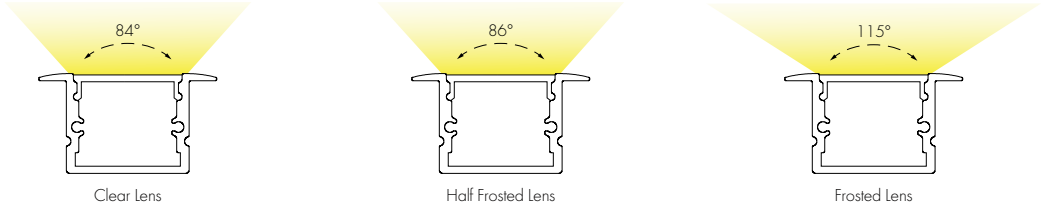

Clear Lens | Half Frosted Lens | Frosted Lens

INCLUDED MOUNTING ACCESSORIES		
EXTRUSION LENGTH	**MOUNTING SCREWS**	**END CAP (PAIR)**
84"	6	1

Each pair of endcaps includes 1x H0 (no wire feed hole) and 1x H1 (with hole) where applicable. Additional endcaps and mounting clips are available for purchase.

TRANSMISSION PERCENTAGE
(COMPARED TO LED TAPE WITHOUT CHANNEL)

LENS	TRANSMISSION %
Clear	65%
Half Frosted	58%
Frosted	44%

See LED tape spec sheet for lens dotting characteristics & compatibility
Use complete Dotting Chart Tool online for more dotting information (Link)

Ordering code

MODEL	LENGTH	LENS	MOUNTING[2]	FINISH
BRC - Basics Recessed Channell[1]	84 - 84"	C - Clear HF - Half Frosted F - Frosted	DS - Direct to Surface Screw Mount	SA - Silver Anodized


1 - End Caps are included with channel, one of H0 (no hole) and one of H1 (with hole). Order additional End Caps as necessary.
2 - Mount Basics Recessed Channel directly to stud using flat head screws (by others), every 16 inches.

REV0.303062026
*LUMINII RESERVES THE RIGHTS TO CHANGE SPECIFICATION & INSTRUCTION WITHOUT NOTICE
www.luminii.com tel: 224-333-6033

Accessories

All Channels come with a specified set of Mounting Clips and End Caps, see Ordering Code for details. Order additional Mounting Clips and End Caps as necessary.

EC-BRC-H0-SA
Silver Anodized End Cap



EC-BRC-H1-SA
Silver Anodized End Cap with powerfeed opening

