



Features

Basics Contractor-Grade x-large extrusions compatible with Basics LED strips.

Finish

Silver anodized Channel

Mounting

Multiple mounting clip





Diffuser Lens

Polycarbonate, snap-in-place, UV resistant

Warranty

5 Years

Product Dimensions

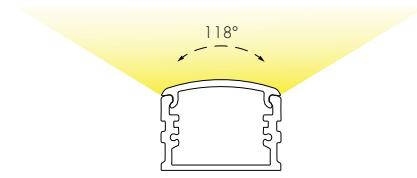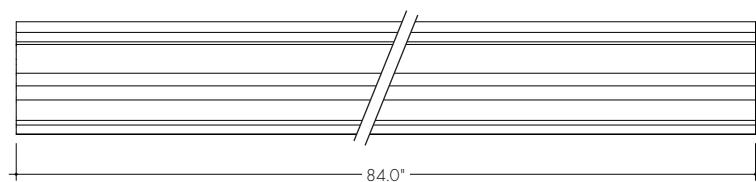

Frosted Lens

INCLUDED MOUNTING ACCESSORIES

EXTRUSION LENGTH	MOUNTING HARDWARE	END CAP (PAIR)
84"	6	1

Each pair of endcaps includes 1x H0 [no wire feed hole] and 1x H1 [with hole] where applicable. Additional endcaps and mounting clips are available for purchase.

TRANSMISSION PERCENTAGE (COMPARED TO LED TAPE WITHOUT CHANNEL)

LENS	TRANSMISSION %
Frosted	53%

See LED tape spec sheet for lens dotting characteristics & compatibility
Use complete Dotting Chart Tool online for more dotting information ([Link](#))

Ordering code

MODEL	LENGTH	LENS	MOUNTING ²	FINISH
BXC - Basics X-Large Channel ¹	84 - 84"	F - Frosted	FC - Fixed Clip	SA - Silver Anodized

¹ End Caps are included with channel, one of H0 (no hole) and one of H1 (with hole). Order additional End Caps as necessary.


² Mounting Clips are included with channel. Refer to chart above for provided mounting clip quantities. Order additional Mounting Clips as necessary.

Accessories

All Channels come with a specified set of Mounting Clips and End Caps, see Ordering Code for details. Order additional Mounting Clips and End Caps as necessary.


EC-BXC-H0-SA

Silver Anodized End Cap



EC-BXC-H1-SA

Silver Anodized End Cap with powerfeed opening



MB-BXC-SS

Fixed Clip
-FC

