



### KEY FEATURES

Beam Options: 6 | 10 | 16 | 30 | 50  
 Light Engine Performance: 653lm | 8.40W  
 Movement: 360 Pan | 90 Tilt  
 Tool-less field changeable optics  
 Ultra narrow high intensity beams  
 Interchangeable accessories  
 UK Part L1 / L2 (Display) Compliant



### OVERVIEW

Microspot 16 is a Constant Voltage single source LED spotlight that is machined from aerospace grade aluminium 6063-T6 and comes as standard in white, black and brushed aluminium along with three premium brass finishes. It has five site-changeable optics for flexible beam distribution. Our 653lm | 8.40W light engine has a max peak intensity of 28223cd. An accessory holder is available separately that can accommodate 55mm (2.16") lenses and louvers. The Jack Plug is compatible with Precision Lighting's 24V Jack systems. The onboard 24V DC driver ensures overcurrent protection and is not polarity sensitive. An external AC to 24V DC power supply is required.

### PERFORMANCE

	Intense				
	U. Narrow	Narrow	Medium	Flood	W. Flood
FWHM	6°	10°	16°	30°	50°
Luminous Flux	650 lm	653 lm	623 lm	637 lm	605 lm
Peak Intensity	28223 cd	15476 cd	5671 cd	1652 cd	633 cd
CCT			2700K   3000K   3500K   4000K		
CRI Min.			92   92   92   90		
LED Current			0.700 A		
Voltage			24 V		
Input Wattage			9 W		
Efficacy			77.7 lm/W		
Driver Type			Constant Voltage   Remote AC to 24VDC		
Class			SELV   Class III		

### ORDER CODE

Model	Type	Output	CCT	Beam Angle	Finish
<b>MIC16</b> Microspot 16	<b>MJ</b> No mounting <sup>2</sup>	<b>IO</b> Intense Output	<b>27K</b> 2700K	<b>UN</b> Ultra Narrow 6°	<b>WH</b> White
	<b>FMJ</b> Flat Monopoint		<b>30K</b> 3000K	<b>NR</b> Narrow 10°	<b>BK</b> Black
	<b>SMJ</b> Surface Monopoint		<b>35K</b> 3500K	<b>ME</b> Medium 16°	<b>AL</b> Br. Aluminium
	<b>NMJ</b> Node Monopoint		<b>40K</b> 4000K	<b>FL</b> Flood 30°	<b>RBZ</b> Rubbed Bronze
	<b>TMJ</b> Trimless Monopoint			<b>WF</b> Wide Flood 50°	<b>BR</b> Br. Brass
	<b>BT</b> Basis Track <sup>1</sup>				<b>PB</b> Polished Brass
	<b>BTW</b> Basis Track Wall <sup>1</sup>				

**Example code:** MIC16-MJ-IO-27K-UN-WH

<sup>1</sup> BT and BTW are available for AL and RBZ only <sup>2</sup> MJ requires the specification of a separate mounting point.

See Drivers, Power Supplies and Accessories sections for further order codes

## LIGHT ENGINE SELECTION

This product is available with our Intense static white light engine option outlined below.

### ► intense ◀

Precisions signature intense light engines offer tight, surgical beams combined with the highest peak intensity values available.

- Ultra-tight beams
- High Peak Cd

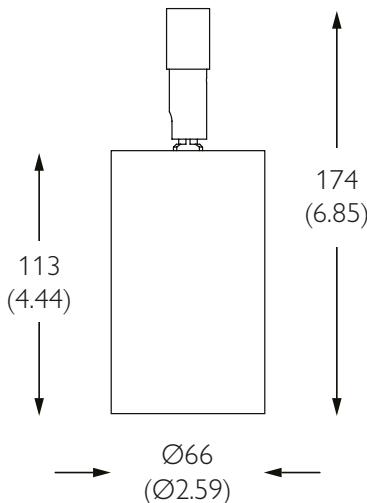
## LIFETIME & ENVIRONMENTAL

At Precision, we design and engineer our products with longevity in mind. Many of the components that make up our light fixtures are both modular and re-usable, making it possible to service and repair them throughout their life in service. Once our products reach the end of their useful life, it is possible to re-work and renew them in to a new product. We prioritise the use of recyclable materials in both our products and packaging, and encourage our customers to engage responsibly in the correct disposal of any materials we supply.

CIBSE TM65	19.57 Kg/CO2e
CIBSE TM66	2.4
RoHS Compliance	Yes
REACH Compliance	Yes
WEEE Compliance	Yes - Registered Producer
Declare	LBC Red List Approved
Lifetime	L90B10 100,000hrs
Warranty	5 Years

UK PART L	
<b>Part L1A / L1B (Dwellings)</b> ≥75 lm/W source lumens	Compliant 105 lm/W Source lm (882 lm) / Source W (8.40 W)
<b>Part L2A (General)</b> ≥95lm/W delivered lumens	-
<b>Part L2A (Display)</b> ≥80 lm/W source lumens	Compliant 105 lm/W Source lm (882 lm) / Source W (8.40 W)

## DIMENSIONS



## MECHANICAL

Location	IP20   Indoor Dry Location Only	Cutout	N/A
Mounting	Basis Track   24V Monopoints	Ceiling Thickness	N/A
Adjustability	360 Pan   90 Tilt	Product Class	SELV   Class III
Lockable	N/A	Material	Machined AL 6063-T6   Machined Brass
Accessories	Louver   Lenses	Weight	470g   1.04lb

## FINISHES



# MICROSPOT 16

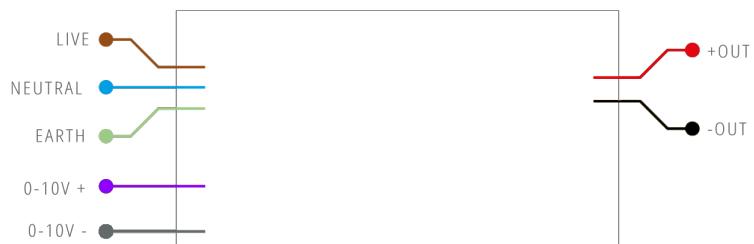
precision  
by luminii

DRIVERS & POWER SUPPLIES – UK, EU, MIDDLE EAST, ASIA, PACIFIC

INTENSE LIGHT ENGINE

## 100W | 0-10V | Remote | Constant Voltage

Input Voltage	230VAC   50/60 Hz
Driver Type	Remote   Constant Voltage
Location	IP20   Indoor Location Only
Dimming Control	0-10V
Min. Dim Level	1.0%
Flicker	IEEE P1789 Compatible   No Observable Effect
Wiring Distance	12 AWG - 10m (33')



## 130W | 0-10V | Remote | Constant Voltage

Input Voltage	230VAC   50/60 Hz
Driver Type	Remote   Constant Voltage
Location	IP20   Indoor Location Only
Dimming Control	0-10V
Min. Dim Level	1.0%
Flicker	IEEE P1789 Compatible   No Observable Effect
Wiring Distance	12 AWG - 10m (33')



## 100W | DALI-2 | Remote | Constant Voltage

Input Voltage	230VAC   50/60 Hz
Driver Type	Remote   Constant Voltage
Location	IP20   Indoor Location Only
Dimming Control	DALI-2
Min. Dim Level	1.0%
Flicker	IEEE P1789 Compatible   No Observable Effect
Wiring Distance	12 AWG - 10m (33')



## INSTALLATION

To ensure consistent dimming performance when using monopoints, it is recommended to use a 12 AWG / 4 mm<sup>2</sup> cable. The increased cross-sectional area of 12 AWG / 4 mm<sup>2</sup> cable minimizes voltage drop between lights, maintaining consistent brightness levels across the entire circuit, especially when dimmed.

Minimize Total Circuit Length:

- To reduce voltage drop, the total length of the lighting circuit should be kept as short as possible.

Close the Loop:

- Arranging the circuit in a U-shape, L-shape, or ring configuration (by joining the first and last lights) helps to balance voltage distribution.
- This technique effectively reduces voltage variation between lights, promoting uniform brightness.

Wiring in a Ring:

- Creating a ring circuit allows current to flow from both ends, significantly reducing the impact of voltage drop along the line.
- This approach is especially beneficial in larger installations or where long cable runs are unavoidable.

Positioning the Power Supply:

- Place the power supply as centrally as possible to reduce voltage drop to the furthest points.
- Consider using multiple supplies for larger installations to maintain consistent voltage.

# MICROSPOT 16

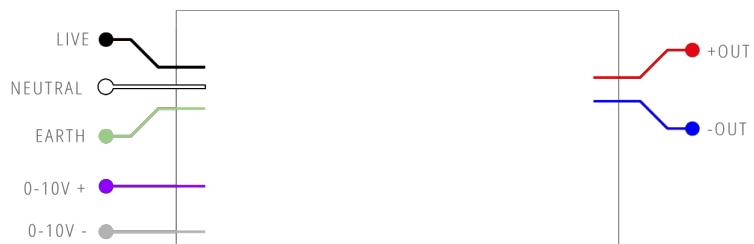
precision  
by luminii

DRIVERS & POWER SUPPLIES – NORTH AMERICA

INTENSE LIGHT ENGINE


## 100W | 0-10V | Remote | Constant Voltage

Input Voltage	120-277V   50/60 Hz
Driver Type	Remote   Constant Voltage
Location	IP20   Indoor Location Only
Dimming Control	0-10V
Min. Dim Level	1.0%
Flicker	IEEE P1789 Compatible   No Observable Effect
Wiring Distance	12 AWG - 10m (33')



## 96W | Phase | Remote | Constant Voltage

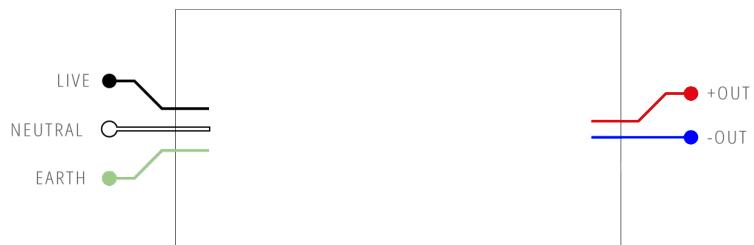Input Voltage	120V   50/60Hz
Driver Type	Remote   Constant Voltage
Location	IP20   Indoor Location Only
Dimming Control	Phase
Min. Dim Level	1.0%
Flicker	IEEE P1789 Compatible   No Observable Effect
Wiring Distance	12 AWG - 10m (33')



## 100W | DALI-2 | Remote | Constant Voltage

Input Voltage	120-277V   50/60 Hz
Driver Type	Remote   Constant Voltage
Location	IP20   Indoor Location Only
Dimming Control	DALI-2
Min. Dim Level	1.0%
Flicker	IEEE P1789 Compatible   No Observable Effect
Wiring Distance	12 AWG - 10m (33')



## INSTALLATION

To ensure consistent dimming performance when using monopoints, it is recommended to use a 12 AWG / 4 mm<sup>2</sup> cable. The increased cross-sectional area of 12 AWG / 4 mm<sup>2</sup> cable minimizes voltage drop between lights, maintaining consistent brightness levels across the entire circuit, especially when dimmed.

Minimize Total Circuit Length:

- To reduce voltage drop, the total length of the lighting circuit should be kept as short as possible.

Close the Loop:

- Arranging the circuit in a U-shape, L-shape, or ring configuration (by joining the first and last lights) helps to balance voltage distribution.
- This technique effectively reduces voltage variation between lights, promoting uniform brightness.

Wiring in a Ring:

- Creating a ring circuit allows current to flow from both ends, significantly reducing the impact of voltage drop along the line.
- This approach is especially beneficial in larger installations or where long cable runs are unavoidable.

Positioning the Power Supply:

- Place the power supply as centrally as possible to reduce voltage drop to the furthest points.
- Consider using multiple supplies for larger installations to maintain consistent voltage.

# MICROSPOT 16

precision  
by luminii

## PHOTOMETRY

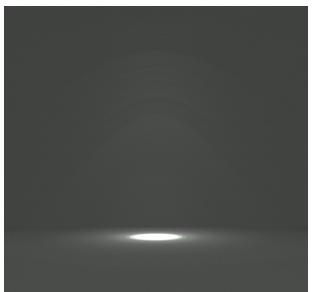

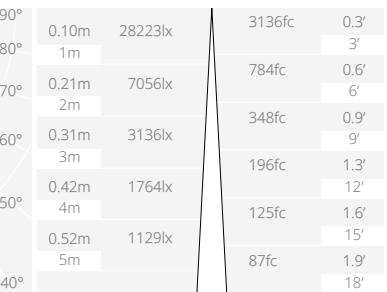




INTENSE LIGHT ENGINE

### OUTPUT SCALING

CCT	Output Multiplier	CRI	R9 Typ.	TM-30: Rf	TM-30: Rg	Max Lm
2400K	-	-	-	-	-	-
2700K	0.90	92	50	90	99	588
3000K	1.00	92	50	90	99	653
3500K	1.00	92	50	90	99	653
4000K	1.00	90	50	90	98	653






Colour Consistency: 2 SDCM at 2700K / 3000K, 3DCM at 3500 / 4000K

### PHOTOMETRY

ULTRA NARROW						
FWHM	Delivered Flux		Cd: 0	90°	3136fc	0.3'
6°	650 lm			0.10m 28223lx	3136fc	0.3'
10°	653 lm			1m	784fc	3'
16°	623 lm			2m	348fc	6'
30°	637 lm			3m	196fc	9'
50°	605 lm			4m	125fc	12'
50°	633 cd			5m	87fc	15'
						18'






## OPTICS


There are 5 tool-less interchangeable optics, cross reference the text on the optic disc for beam.

Optic Disc	Optic Disc	Optic Disc	Optic Disc	Optic Disc
				
<b>Ultra Narrow Disc</b>	<b>Narrow Disc</b>	<b>Medium Disc</b>	<b>Flood Disc</b>	<b>Wide Flood Disc</b>
FWHM 6 deg	FWHM 10 deg	FWHM 16 deg	FWHM 30 deg	FWHM 50 deg
Order Code 931-01	Order Code 931-02	Order Code 931-03	Order Code 931-04	Order Code 931-05

## ACCESSORIES

This product can hold 2 x accessories using the double accessory holder. Accessories are pre-installed unless otherwise requested.

Accessory Holder	Glare Control	Beam Shaping	Beam Shaping	Colour Change
				
<b>Double Accessory Holder</b>	<b>Honeycomb Louver</b>	<b>Softening Lens</b>	<b>Linear Lens</b>	<b>1/4 CTO</b>
W63xH14mm   W2.48xH0.55" Order Code 254-BK	W55xH3.2mm   W2.17xH0.13" Order Code 995-55-BK	W55xH3.2mm   W2.17xH0.13" Order Code 991-55	W55xH3.2mm   W2.17xH0.13" Order Code 992-55	W55xH1.8mm   W2.17xH0.07" Order Code 997-1/4CTO-55

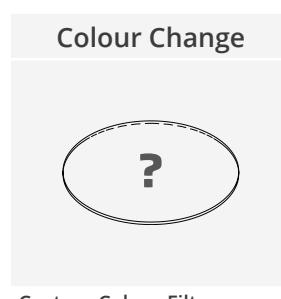

**Custom Colour Filter**

W55xH1.8mm | W2.17xH0.07"

Order Code

Contact Sales Rep

Linear      Softening      1/4 CTO      Honeycomb



**Clip**  
Included with holder

**Accessory**



**Double Accessory Holder**  
Can hold 2 accessories

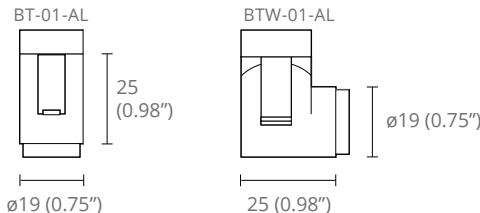
## MOUNTING OPTIONS

### MOUNTING OPTIONS

#### BT & BTW - BASIS TRACK

For use with Precision Lighting Basis Track


ADAPTOR CODE	FINISH
BT-01-AL	Brushed Aluminium
BT-01-RB	Rubbed Bronze
BTW-01-AL	Brushed Aluminium
BTW-01-RB	Rubbed Bronze



#### MPZ - SURFACE MONOPOINT

For blind mounting on solid surfaces

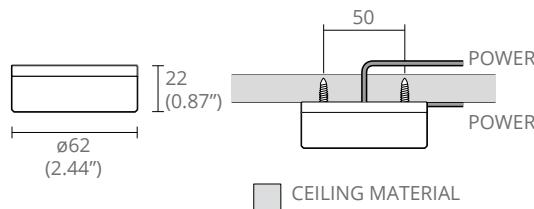MONOPOINT CODE	FINISH
MPZ-01-AL	Brushed Aluminium
MPZ-01-WH	White RAL 9010
MPZ-01-BK	Black RAL 9005
MPZ-01-RB	Rubbed Bronze
MPZ-01-PB	Polished Brass
MPZ-01-SB	Brushed Brass




#### MPS - TRIMLESS MONOPOINT

For use with plasterboard / sheetrock

*Note: Canopy not standard, for non-trimless install.*

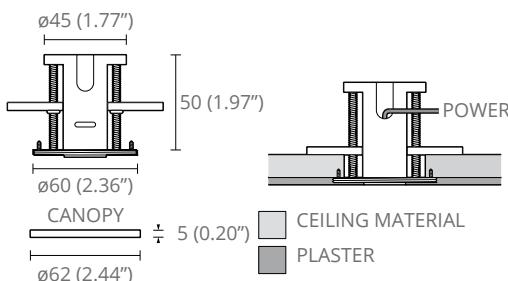MONOPOINT CODE	FINISH
MPS-01-AL	Brushed Aluminium
MPS-02-AL	Brushed Aluminium
MPS-02-BK	Black RAL 9005
MPS-02-WH	White RAL 9010




#### MPY - NODE MONOPOINT

For use in cabinetry

*Note: rear access required after install*

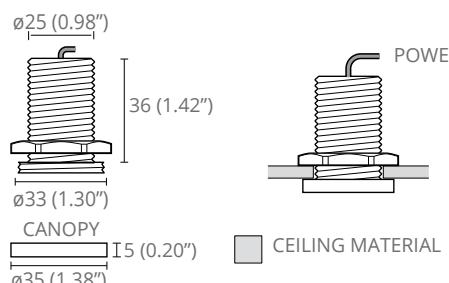MONOPOINT CODE	FINISH
MPY-05-AL	Brushed Aluminium
MPY-05-WH	White RAL 9010
MPY-05-BK	Black RAL 9005
MPY-05-RB	Rubbed Bronze
MPY-05-PB	Polished Brass
MPY-05-SB	Brushed Brass



#### MPX - FLAT MONOPOINT

For use with most mounting surfaces

*Note: wiring void required*

MONOPOINT CODE	FINISH
MPX-02-AL	Brushed Aluminium
MPX-02-WH	White RAL 9010
MPX-02-BK	Black RAL 9005
MPX-02-RB	Rubbed Bronze
MPX-01-PB	Polished Brass
MPX-01-SB	Brushed Brass

