

DOMINO 4 SURFACE

PRODUCT OVERVIEW

STANDARD LIGHT ENGINE



KEY FEATURES

- Beam Options: 12 | 30 | 60 | 12x35 | 35x12
- Light Engine Performance: 656lm | 8.96W
- Field changeable optics
- Round beams from a linear product
- UK Part L1 / L2 (Display) Compliant
- Title 24 JA8 Certified



OVERVIEW

Domino 4 Surface is a Constant Current multi source LED spotlight that is machined from aerospace grade aluminium 6063-T6 and comes as standard in white, black and brushed aluminium. It has five site-changeable beam distributions including elliptical beams. Our 656lm | 8.96W light engine has a max peak intensity of 6264cd.

PERFORMANCE

	Standard				
	Narrow	Flood	W. Flood	Ellipse	V. Ellipse
FWHM	12°	30°	60°	12x35°	35x12°
Luminous Flux	656 lm	600 lm	652 lm	656 lm	656 lm
Peak Intensity	6264 cd	1880 cd	652 cd	3888 cd	3888 cd
CCT	2700K 3000K				
CRI Min.	95 95				
LED Current	0.700 A				
Voltage	12.8 V				
Input Wattage	8.96 W				
Efficacy	73.2 lm/W				
Driver Type	Constant Current Remote				
Class	SELV Class III				

ORDER CODE

Model	Type	Output	CCT	Beam Angle	Finish
DMO4 Domino 4	SP Surface Plate	SO Standard Output	27K 2700K	NR Narrow 12°	WH White
			30K 3000K	ME Medium 30°	BK Black
				WD Wide 60°	AL Br. Aluminium
				12X35 Elliptical 12x35°	
				35X12 Elliptical 35x12°	

Example code: DMO4-SP-SO-27K-NR-WH

See Drivers, Power Supplies and Accessories sections for further order codes

LIGHT ENGINE SELECTION

This product is available with a single static white light engine option outlined below.

STANDARD
OUTPUT

Our standard output light engines embody Precision's commitment to excellence, delivering high CRI, efficient performance, and clean, well-defined beams.

- High CRI
- Crisp clean beams

LIFETIME & ENVIRONMENTAL

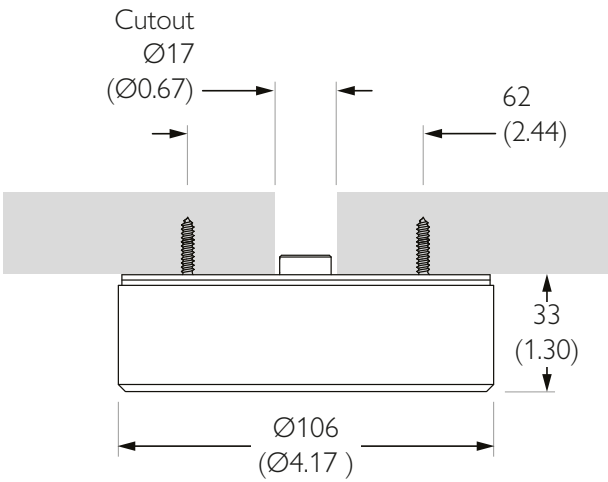
At Precision, we design and engineer our products with longevity in mind. Many of the components that make up our light fixtures are both modular and re-usable, making it possible to service and repair them throughout their life in service. Once our products reach the end of their useful life, it is possible to re-work and renew them in to a new product. We prioritise the use of recyclable materials in both our products and packaging, and encourage our customers to engage responsibly in the correct disposal of any materials we supply.

CIBSE TM65	11.15 Kg/CO2e
CIBSE TM66	2.4
RoHS Compliance	Yes
REACH Compliance	Yes
WEEE Compliance	Yes - Registered Producer
Declare	LBC Red List Approved
Lifetime	L90B10 100,000hrs
Warranty	5 Years

UK PART L	
Part L1A / L1B (Dwellings)	Compliant 164 lm/W ≥75 lm/W source lumens Source lm (1469 lm) / Source W (8.96 W)
Part L2A (General)	- ≥95lm/W delivered lumens
Part L2A (Display)	Compliant 164 lm/W ≥80 lm/W source lumens Source lm (1469 lm) / Source W (8.96 W)

DOMINO 4 SURFACE


DIMENSIONS



MECHANICAL

Location	IP20 Indoor Dry Location Only	Cutout	$\varnothing 17\text{mm}$ (0.67")
Mounting	Surface mounting plate	Ceiling Thickness	N/A
Adjustability	N/A Pan N/A Tilt	Product Class	SELV Class III
Lockable	N/A	Material	Machined AL 6063-T6
Accessories	N/A	Weight	183g 0.40lb

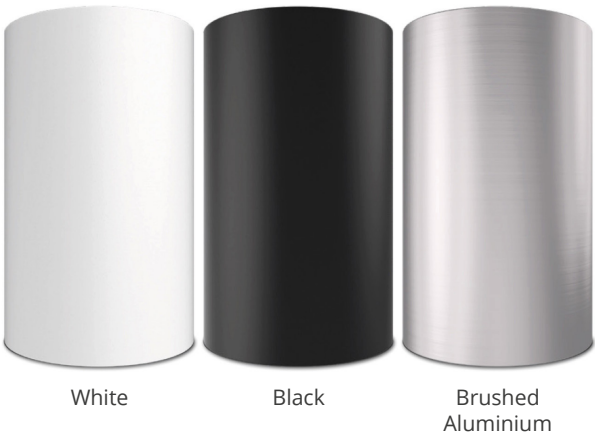FINISHES



DOMINO 4 SURFACE

20W | 0-10V | Remote | Constant Current

Input Voltage	230VAC 50/60 Hz
Driver Type	Remote Constant Current
Location	IP20 Indoor Location Only
Dimming Control	0-10V
Min. Dim Level	0.1%
Flicker	IEEE P1789 Compatible No Observable Effect
Wiring Distance	16 AWG - 36m (118') 18 AWG 22m (72')



	All CCT's		L	W	H
Max. Lights	1 to 2 in series	mm	160	41	30
Order Code	PSCC-20-700-A-EL	in	6.3	1.61	1.18

20W | DALI-2 | Remote | Constant Current

Input Voltage	230VAC 50/60 Hz
Driver Type	Remote Constant Current
Location	IP20 Indoor Location Only
Dimming Control	DALI-2
Min. Dim Level	0.1%
Flicker	IEEE P1789 Compatible No Observable Effect
Wiring Distance	16 AWG - 36m (118') 18 AWG 22m (72')



	All CCT's		L	W	H
Max. Lights	1 to 2 in series	mm	160	41	30
Order Code	PSCC-20-700-D-EL	in	6.3	1.61	1.18

DOMINO 4 SURFACE

DRIVERS & POWER SUPPLIES - NORTH AMERICA

STANDARD LIGHT ENGINE

30W | 0-10V | Remote | Constant Current


Input Voltage	120-277V 50/60 Hz
Driver Type	Remote Constant Current
Location	IP20 Indoor Location Only
Dimming Control	0-10V
Min. Dim Level	0.1%
Flicker	IEEE P1789 Compatible No Observable Effect
Wiring Distance	16 AWG - 36m (118') 18 AWG 22m (72')



	All CCT's		L	W	H
Max. Lights	1 to 3 in series	mm	348	65	47
Order Code	USCC-30-700-A-EL-ENC	in	13.7	2.56	1.85

30W | DALI-2 | Remote | Constant Current


Input Voltage	120-277V 50/60 Hz
Driver Type	Remote Constant Current
Location	IP20 Indoor Location Only
Dimming Control	DALI-2
Min. Dim Level	0.1%
Flicker	IEEE P1789 Compatible No Observable Effect
Wiring Distance	16 AWG - 36m (118') 18 AWG 22m (72')

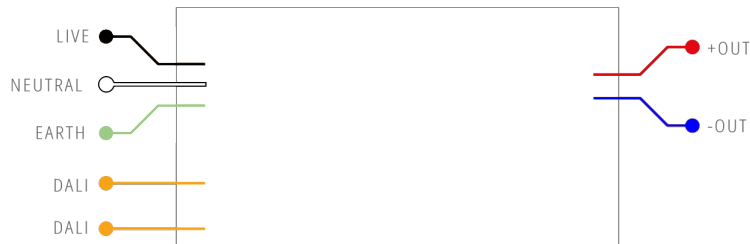

	All CCT's		L	W	H
Max. Lights	1 to 3 in series	mm	348	65	47
Order Code	USCC-30-700-D-EL-ENC	in	13.7	2.56	1.85

12W | Phase | Remote | Constant Current

Input Voltage	120V 50/60Hz
Driver Type	Remote Constant Current
Location	IP20 Indoor Location Only
Dimming Control	Phase
Min. Dim Level	1.0%
Flicker	IEEE P1789 Compatible No Observable Effect
Wiring Distance	16 AWG - 14m (46') 18 AWG 9m (30')

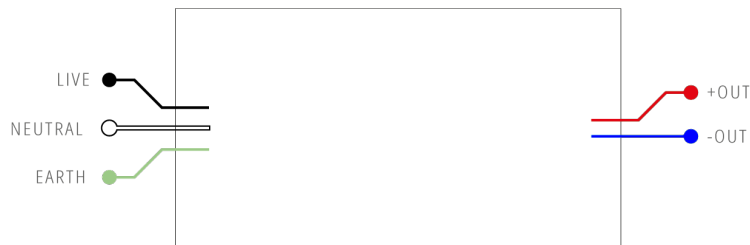

	All CCT's		L	W	H
Max. Lights	1 only	mm	247	65	47
Order Code	USCC-12-700-P-HT-ENC	in	9.72	2.56	1.85

DOMINO 4 SURFACE

PHOTOMETRY









STANDARD LIGHT ENGINE

OUTPUT SCALING

CCT	Output Multiplier	CRI	R9 Typ.	TM-30: Rf	TM-30: Rg	Max Lm
2400K	-	-	-	-	-	-
2700K	1.00	95	65	90	98	656
3000K	1.00	95	65	90	99	656
3500K	-	-	-	-	-	-
4000K	-	-	-	-	-	-

Colour Consistency: 3 SDCM

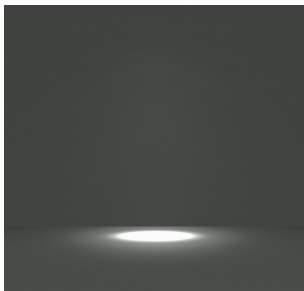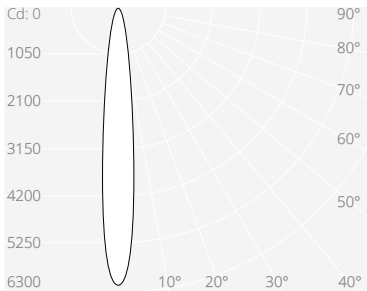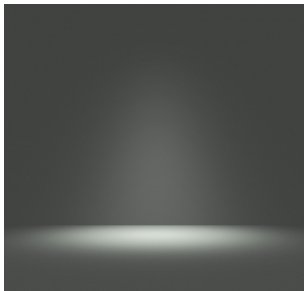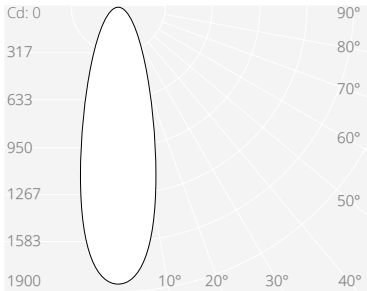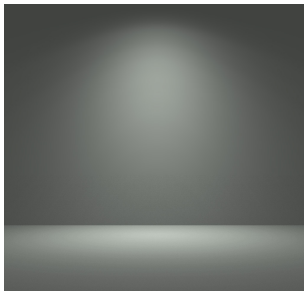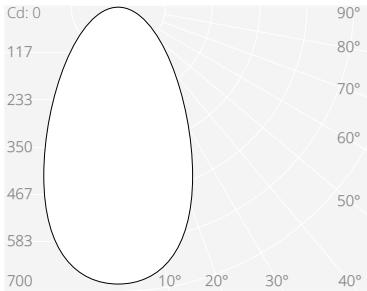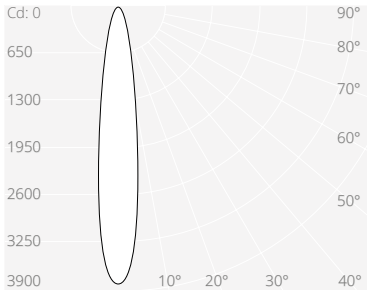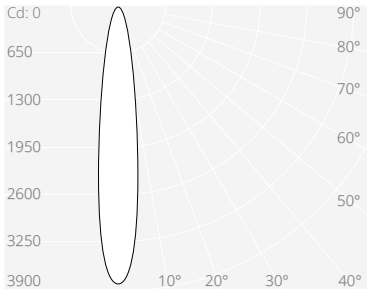PHOTOMETRY

NARROW				<table><tr><td>0.21m</td><td>6264lx</td><td>696fc</td><td>0.6'</td></tr><tr><td>1m</td><td></td><td></td><td>3'</td></tr><tr><td>0.42m</td><td>1566lx</td><td>174fc</td><td>1.3'</td></tr><tr><td>2m</td><td></td><td></td><td>6'</td></tr><tr><td>0.63m</td><td>696lx</td><td>77fc</td><td>1.9'</td></tr><tr><td>3m</td><td></td><td></td><td>9'</td></tr><tr><td>0.84m</td><td>392lx</td><td>44fc</td><td>2.5'</td></tr><tr><td>4m</td><td></td><td></td><td>12'</td></tr><tr><td>1.05m</td><td>251lx</td><td>28fc</td><td>3.2'</td></tr><tr><td>5m</td><td></td><td></td><td>15'</td></tr><tr><td></td><td></td><td>19fc</td><td>3.8'</td></tr><tr><td></td><td></td><td></td><td>18'</td></tr></table>	0.21m	6264lx	696fc	0.6'	1m			3'	0.42m	1566lx	174fc	1.3'	2m			6'	0.63m	696lx	77fc	1.9'	3m			9'	0.84m	392lx	44fc	2.5'	4m			12'	1.05m	251lx	28fc	3.2'	5m			15'			19fc	3.8'				18'
0.21m	6264lx	696fc	0.6'																																																	
1m			3'																																																	
0.42m	1566lx	174fc	1.3'																																																	
2m			6'																																																	
0.63m	696lx	77fc	1.9'																																																	
3m			9'																																																	
0.84m	392lx	44fc	2.5'																																																	
4m			12'																																																	
1.05m	251lx	28fc	3.2'																																																	
5m			15'																																																	
		19fc	3.8'																																																	
			18'																																																	
FLOOD				<table><tr><td>0.54m</td><td>1880lx</td><td>209fc</td><td>1.6'</td></tr><tr><td>1m</td><td></td><td></td><td>3'</td></tr><tr><td>1.07m</td><td>470lx</td><td>52fc</td><td>3.2'</td></tr><tr><td>2m</td><td></td><td></td><td>6'</td></tr><tr><td>1.61m</td><td>209lx</td><td>23fc</td><td>4.8'</td></tr><tr><td>3m</td><td></td><td></td><td>9'</td></tr><tr><td>2.14m</td><td>118lx</td><td>33fc</td><td>6.4'</td></tr><tr><td>4m</td><td></td><td></td><td>12'</td></tr><tr><td>2.68m</td><td>75lx</td><td>8fc</td><td>8.0'</td></tr><tr><td>5m</td><td></td><td></td><td>15'</td></tr><tr><td></td><td></td><td>6fc</td><td>9.6'</td></tr><tr><td></td><td></td><td></td><td>18'</td></tr></table>	0.54m	1880lx	209fc	1.6'	1m			3'	1.07m	470lx	52fc	3.2'	2m			6'	1.61m	209lx	23fc	4.8'	3m			9'	2.14m	118lx	33fc	6.4'	4m			12'	2.68m	75lx	8fc	8.0'	5m			15'			6fc	9.6'				18'
0.54m	1880lx	209fc	1.6'																																																	
1m			3'																																																	
1.07m	470lx	52fc	3.2'																																																	
2m			6'																																																	
1.61m	209lx	23fc	4.8'																																																	
3m			9'																																																	
2.14m	118lx	33fc	6.4'																																																	
4m			12'																																																	
2.68m	75lx	8fc	8.0'																																																	
5m			15'																																																	
		6fc	9.6'																																																	
			18'																																																	
WIDE FLOOD				<table><tr><td>1.15m</td><td>652lx</td><td>72fc</td><td>3.5'</td></tr><tr><td>1m</td><td></td><td></td><td>3'</td></tr><tr><td>2.31m</td><td>163lx</td><td>18fc</td><td>6.9'</td></tr><tr><td>2m</td><td></td><td></td><td>6'</td></tr><tr><td>3.46m</td><td>72lx</td><td>8fc</td><td>10.4'</td></tr><tr><td>3m</td><td></td><td></td><td>9'</td></tr><tr><td>4.62m</td><td>41lx</td><td>5fc</td><td>13.9'</td></tr><tr><td>4m</td><td></td><td></td><td>12'</td></tr><tr><td>5.77m</td><td>26lx</td><td>3fc</td><td>17.3'</td></tr><tr><td>5m</td><td></td><td></td><td>15'</td></tr><tr><td></td><td></td><td>2fc</td><td>20.8'</td></tr><tr><td></td><td></td><td></td><td>18'</td></tr></table>	1.15m	652lx	72fc	3.5'	1m			3'	2.31m	163lx	18fc	6.9'	2m			6'	3.46m	72lx	8fc	10.4'	3m			9'	4.62m	41lx	5fc	13.9'	4m			12'	5.77m	26lx	3fc	17.3'	5m			15'			2fc	20.8'				18'
1.15m	652lx	72fc	3.5'																																																	
1m			3'																																																	
2.31m	163lx	18fc	6.9'																																																	
2m			6'																																																	
3.46m	72lx	8fc	10.4'																																																	
3m			9'																																																	
4.62m	41lx	5fc	13.9'																																																	
4m			12'																																																	
5.77m	26lx	3fc	17.3'																																																	
5m			15'																																																	
		2fc	20.8'																																																	
			18'																																																	
ELLIPSE				<table><tr><td>0.21m</td><td>3888lx</td><td>432fc</td><td>0.6'</td></tr><tr><td>1m</td><td></td><td></td><td>3'</td></tr><tr><td>0.42m</td><td>972lx</td><td>108fc</td><td>1.3'</td></tr><tr><td>2m</td><td></td><td></td><td>6'</td></tr><tr><td>0.63m</td><td>432lx</td><td>48fc</td><td>1.9'</td></tr><tr><td>3m</td><td></td><td></td><td>9'</td></tr><tr><td>0.84m</td><td>243lx</td><td>27fc</td><td>2.5'</td></tr><tr><td>4m</td><td></td><td></td><td>12'</td></tr><tr><td>1.05m</td><td>156lx</td><td>17fc</td><td>3.2'</td></tr><tr><td>5m</td><td></td><td></td><td>15'</td></tr><tr><td></td><td></td><td>12fc</td><td>3.8'</td></tr><tr><td></td><td></td><td></td><td>18'</td></tr></table>	0.21m	3888lx	432fc	0.6'	1m			3'	0.42m	972lx	108fc	1.3'	2m			6'	0.63m	432lx	48fc	1.9'	3m			9'	0.84m	243lx	27fc	2.5'	4m			12'	1.05m	156lx	17fc	3.2'	5m			15'			12fc	3.8'				18'
0.21m	3888lx	432fc	0.6'																																																	
1m			3'																																																	
0.42m	972lx	108fc	1.3'																																																	
2m			6'																																																	
0.63m	432lx	48fc	1.9'																																																	
3m			9'																																																	
0.84m	243lx	27fc	2.5'																																																	
4m			12'																																																	
1.05m	156lx	17fc	3.2'																																																	
5m			15'																																																	
		12fc	3.8'																																																	
			18'																																																	
VERTICAL ELLIPSE				<table><tr><td>0.61m</td><td>3888lx</td><td>432fc</td><td>1.8'</td></tr><tr><td>1m</td><td></td><td></td><td>3'</td></tr><tr><td>1.22m</td><td>972lx</td><td>108fc</td><td>3.7'</td></tr><tr><td>2m</td><td></td><td></td><td>6'</td></tr><tr><td>1.83m</td><td>432lx</td><td>48fc</td><td>5.5'</td></tr><tr><td>3m</td><td></td><td></td><td>9'</td></tr><tr><td>2.45m</td><td>243lx</td><td>27fc</td><td>7.3'</td></tr><tr><td>4m</td><td></td><td></td><td>12'</td></tr><tr><td>3.06m</td><td>156lx</td><td>17fc</td><td>9.2'</td></tr><tr><td>5m</td><td></td><td></td><td>15'</td></tr><tr><td></td><td></td><td>12fc</td><td>11.0'</td></tr><tr><td></td><td></td><td></td><td>18'</td></tr></table>	0.61m	3888lx	432fc	1.8'	1m			3'	1.22m	972lx	108fc	3.7'	2m			6'	1.83m	432lx	48fc	5.5'	3m			9'	2.45m	243lx	27fc	7.3'	4m			12'	3.06m	156lx	17fc	9.2'	5m			15'			12fc	11.0'				18'
0.61m	3888lx	432fc	1.8'																																																	
1m			3'																																																	
1.22m	972lx	108fc	3.7'																																																	
2m			6'																																																	
1.83m	432lx	48fc	5.5'																																																	
3m			9'																																																	
2.45m	243lx	27fc	7.3'																																																	
4m			12'																																																	
3.06m	156lx	17fc	9.2'																																																	
5m			15'																																																	
		12fc	11.0'																																																	
			18'																																																	

OPTICS

There are 5 interchangeable optics

Optic	Optic	Optic
		
Narrow TIR Optic FWHM 12 deg	Medium TIR Optic FWHM 30 deg	Wide TIR Optic FWHM 60 deg
Order Code 701-12	Order Code 701-30	Order Code 701-60

ACCESSORIES

This product does not have interchangeable accessories, if required please contact us for modification opportunities