ENYO 3

DOWNLIGHT - WALL WASH

TUNABLE WHITE & WARM DIM

senso by luminii

Features


- Ceiling thickness must be between 1/4" and 1" (6mm & 25mm).
- Faceted and Smooth metal reflectors provide beam spreads between 10° to 80°.
- Nine drivers selections available to cover wide range of applications.
- Four output options available up to 3000 lumens.
- Five year warranty.

Finish Options


- White
- Black
- Silver


c UL us LISTED · MADE IN CANADA · TITLE 24 JA8 COMPLIANT · RoHS


Downlight



Wall Wash







Technical Information

TYPE	WD1830				TW2765	
OUTPUT OPTIONS	**1000 lm**	**1500 lm**	**2000 lm**	**3000 lm**	**1500 lm**	**3000 lm**
Fixture wattage	11.2 W	16.2 W	21.2 W	31.8 W	16.37 W	34.33 W
Delivered Lumen at full on	1072 lm	1563 lm	2006 lm	2822 lm	1500 lm	2924 lm
Efficacy	96 lm/W	96 lm/W	95 lm/W	89 lm/W	92 lm/W	85 lm/W
Center Beam Candlepower (10° Faceted Reflector)	8012 cd	11682 cd	14992 cd	21091 cd	11211 cd	21853 cd

CCT	TM-30			
	CRI	R_f	R_g	R_9
1800K	94	90	93	61
3000K	94	89	97	72
2700K	91	90	96	59
6500K	93	87	97	73

Ordering Code

Example: Fixture ENY3-D-TR-10-WD1830-F10-NA-WH-WH
HRM-ENY3-D-TR-10-WD1830-PHSD-NA

Fixture

MODEL - TYPE - TRIM - OUTPUT - CCT - OPTIC - ACCESSORY - TRIM FINISH - BAFFLE FINISH

ENY3-Enyo 3"

TYPE
- **D**-Fixed Downlight
- **W**-Wall Wash[1]

TRIM
- **TR**-Trimmed

OUTPUT
- **10**-1000 lumens
- **15**-1500 lumens
- **20**-2000 lumens
- **30**-3000 lumens[10]

CCT
- **WD1830**-Warm Dim, 1800K-3000K
- **TW2765**-Tunable White, 2700K-6500K[7,8,9]

OPTIC
- **F10**-10 Degree, Faceted
- **F18**-18 Degree, Faceted
- **F30**-30 Degree, Faceted
- **F45**-45 Degree, Faceted
- **F60**-60 Degree, Smooth
- **S30**-30 Degree, Smooth
- **S45** 45 Degree, Smooth
- **S80** 80 Degree, Smooth

ACCESSORY
- **NA**-No Accessory
- **CL**-Clear Lens
- **DL**-Diffusing Lens
- **HC**-Honeycomb Louver
- **SL**-Solite Lens

TRIM FINISH
- **WH**-White
- **BK**-Black
- **SL**-Silver

BAFFLE FINISH
- **WH**-White
- **BK**-Black
- **SL**-Silver

HOUSING - MODEL - TRIM - OUTPUT - CCT - DRIVER - DRIVER OPTIONS

HOUSING
- **HRM**-Remote Power Supply (Non-IC)
- **HP**-New Construction Pan (Non-IC)
- **HIC**-Housing, IC Rated[2]

MODEL
- **ENY3-D**-Enyo 3" Fixed Downlight
- **ENY3-W**-Enyo 3" Wall Wash

TRIM - Same as Fixture

OUTPUT - Same as Fixture

CCT - Same as Fixture

DRIVER
- **PHSD**-Forward/Reverse Phase, 1% Dimming, 120V Only
- **010S**-0-10V, 1% Dimming, 120/277V
- **0103**-0-10V, 1% Dimming, 347V Only
- **010L**-EldoLED, 0-10V, Linear, 0.1% Dimming, 120/277V
- **010G**-EldoLED, 0-10V, Log, 0.1% Dimming, 120/277V
- **DALI**-EldoLED, DALI Protocol 2, DT-6, 0.1% Dimming, 120/277V
- **DALI8**-EldoLED, DALI Protocol 2, DT-8, 0.1% Dimming, 120/277V[4]
- **LUTE**-Lutron Hilume Ecodigital, 1% Dimming, 120V/277V[3,4]
- **DMX**-EldoLED, DMX, 0.1% Dimming, 120V/277V[4]

DRIVER OPTIONS
- **NA**-None
- **EMG**-Emergency Driver[4,5]
- **AWNR**-Athena[6]

1 - Wall Wash is only available with Optic F18 - 18 Degree, Faceted and DL - Diffusing Lens.
2 - Housing HIC is not available when output exceeds 1500 lumens.
3 - LUTE driver is not available at 700 lumens.
4 - Drivers DALI8/LUTE/DMX/EMG are only available with HRM - Remote Power Supply.
5 - Emergency option comes prewired from factory with driver in remote housing. 8W of continuous power provided for a minimum of 90 minutes. Must be installed within 30 feet of luminaire using 18 AWG wire. Only available with 010S/010L/010G/PHSD/DALI Drivers.
6 - AWNR only available with HP/HIC Housings and 010S Driver.
7 - TW2765 only available with 1500/3000 lumens.
8 - TW2765 only available with Drivers 010L/010G/DALI8/DMX. Cannot use with EMG.
9 - TW2765 requires HRM - Remote Power Supply.
10 - Requires Thermal Protector, please inform manufacturer of Building Voltage 120V, 277V, or 347V. Thermals are not Universal.


CONTACT FACTORY FOR MORE OPTIONS

info@luminii.com | luminii.com

*LUMINII RESERVES THE RIGHTS TO CHANGE SPECIFICATION & INSTRUCTION WITHOUT NOTICE

Dimensions

Trimmed

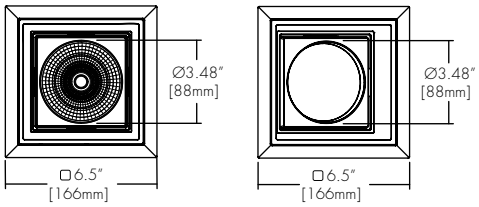



Downlight & Adjustable Lens

CL
Clear Lens




DL
Diffusing Lens



HC
Honeycomb Louver




SL
Solite Lens



Wall Wash Lens

DL
Diffusing Lens



Optics

Faceted Reflector
(10°,18°, 30°, 45°, 60°)



Smooth Reflector
(30°, 45°, 80°)




Trim Finishes


BK
Black



WH
White



SL
Silver




Baffle Finishes


BK
Black



WH
White



SL
Silver



Any combination may be used for Trim and Baffle finishes.


info@luminii.com | luminii.com

*LUMINII RESERVES THE RIGHTS TO CHANGE SPECIFICATION & INSTRUCTION WITHOUT NOTICE

Remote Driver Housing


Maximum mounting distance to luminaire using 18 AWG wire						
010S	PHSD	010L	010G	DALI DALI8	DMX	LUTE
16'	16'	72'	72'	72'	149'	15'

HRM Single with Externally Mounted Driver

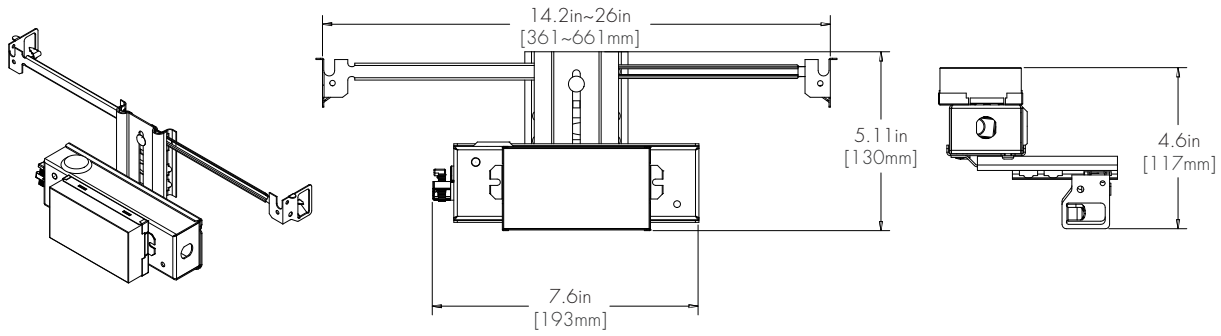


Driver	+	Driver Option
010L	+	NA
010G	+	NA
010S	+	NA
DALI	+	NA
LUTE	+	NA

HRM Single

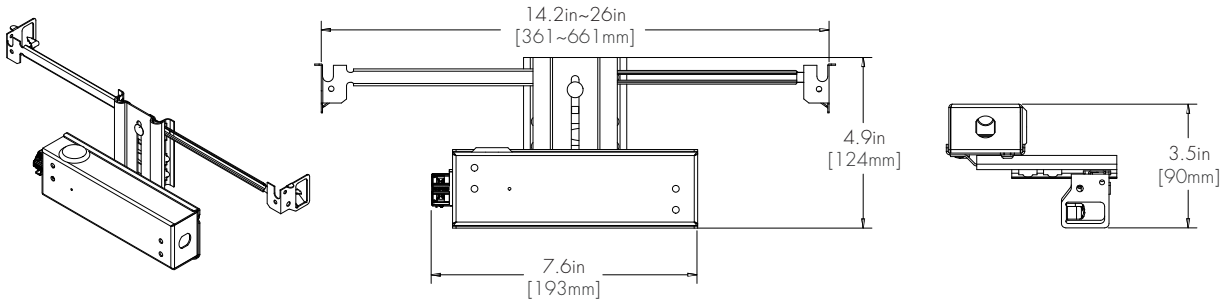


Driver	+	Driver Option
PHSD	+	NA

HRM Double

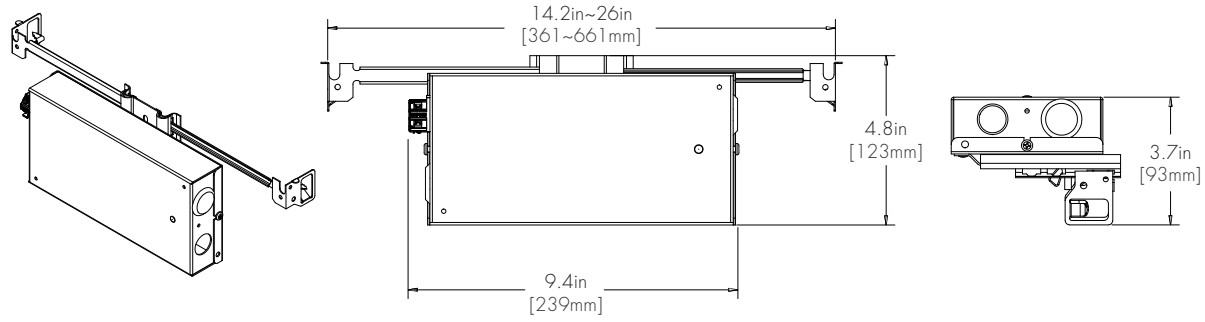

Driver	+	Driver Option
DALI8	+	NA
DMX	+	NA

EMG Emergency Driver (120 minutes EMG operation time)

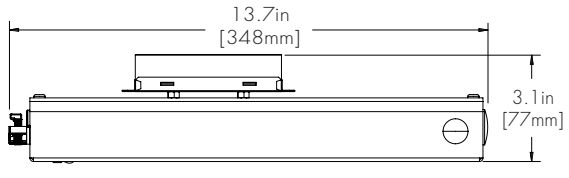


Driver	+	Driver Option
010L	+	EMG
010G	+	EMG
010S	+	EMG
DALI	+	EMG
PHSD	+	EMG


info@luminii.com | luminii.com


*LUMINII RESERVES THE RIGHTS TO CHANGE SPECIFICATION & INSTRUCTION WITHOUT NOTICE

Remote Driver Housing


HP
New Construction Pan (Non-IC)

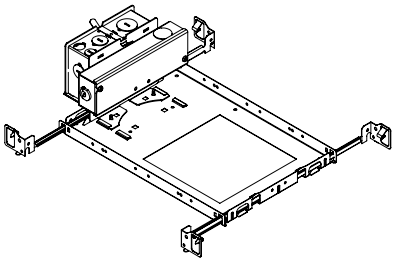


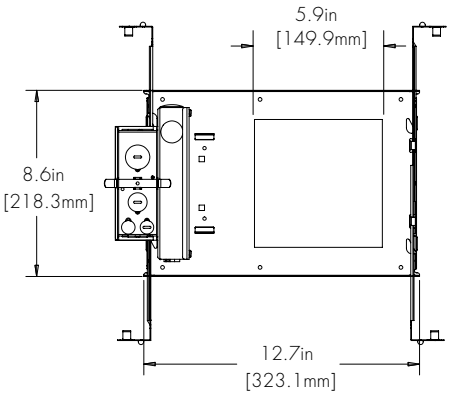


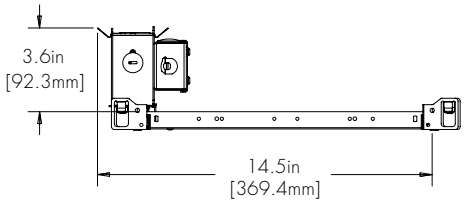

Driver	+	Driver Option
PHSD	+	NA

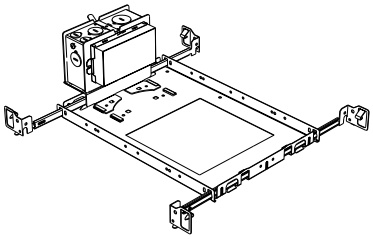


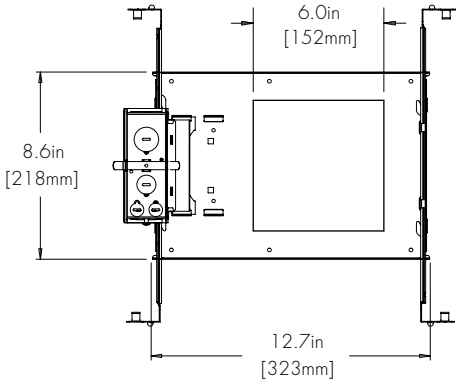


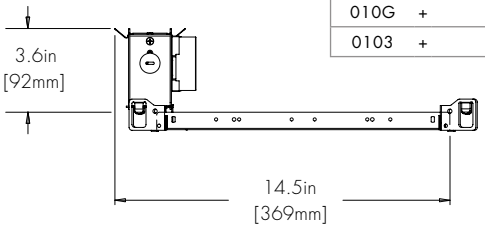


Driver	+	Driver Option
DALI	+	NA
010S	+	NA
010S	+	AWNR
010L	+	NA
010G	+	NA
0103	+	NA

HIC
Housing, IC Rated

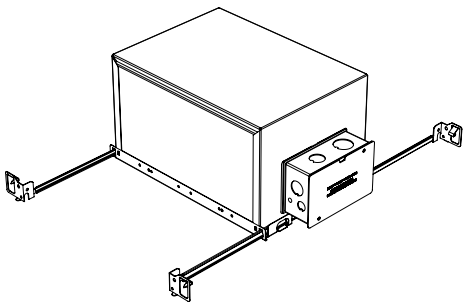

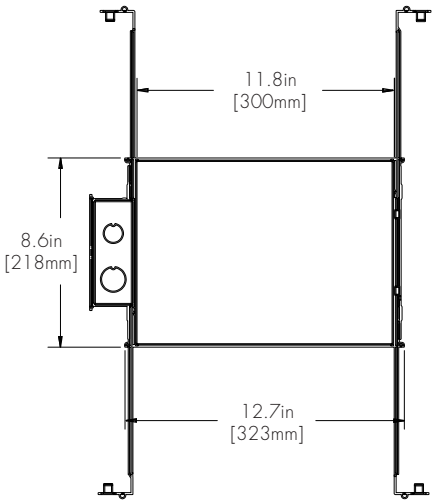

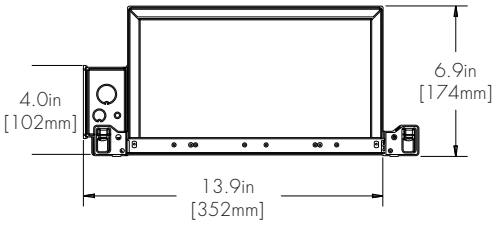


Driver	+	Driver Option
PHSD	+	NA
DALI	+	NA
010S	+	NA
010S	+	AWNR
010L	+	NA
010G	+	NA
0103	+	NA


info@luminii.com | luminii.com
*LUMINII RESERVES THE RIGHTS TO CHANGE SPECIFICATION & INSTRUCTION WITHOUT NOTICE

TM-30


Warm Dim 1800K




Warm Dim 3000K



Tunable White 2700K




Tunable White 6500K




info@luminii.com | luminii.com
*LUMINII RESERVES THE RIGHTS TO CHANGE SPECIFICATION & INSTRUCTION WITHOUT NOTICE


Photometry


10° Faceted Reflector

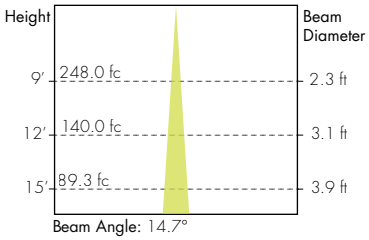





18° Faceted Reflector

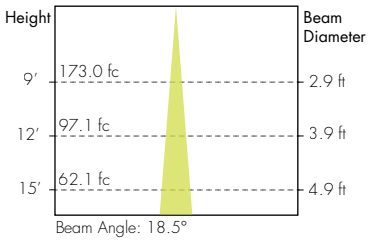





30° Faceted Reflector

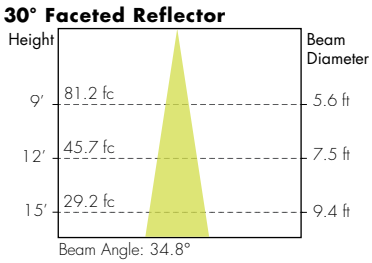





45° Faceted Reflector

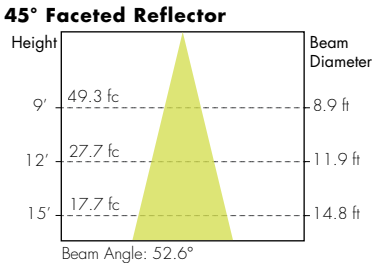





60° Faceted Reflector

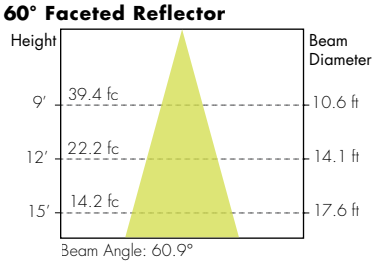





30° Smooth Reflector

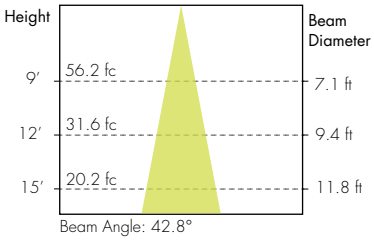





45° Smooth Reflector

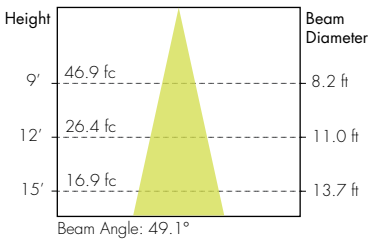





80° Smooth Reflector

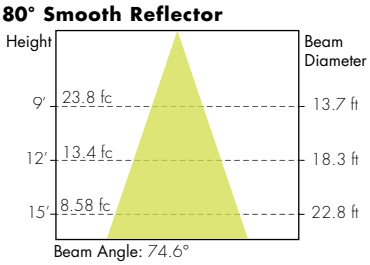



Wall Wash 18° Faceted Reflector

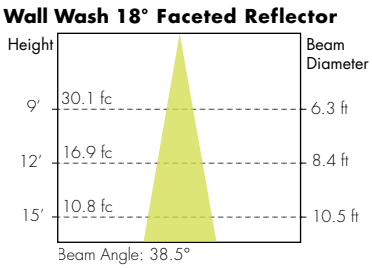



*LUMINII RESERVES THE RIGHTS TO CHANGE SPECIFICATION & INSTRUCTION WITHOUT NOTICE