



Features

F.O.T.™ IP67 is a collection of high performance precision optics distinguished by its industry leading size to efficacy ratio and ability to seamlessly interconnect. F.O.T.™ IP67 allows for surface mount solutions for beam control in wall washing, grazing, spot and asymmetric distributions for limitless design scenarios.

Mounting

FOT Flex strip is equipped with adhesive tape.

Applications

Outdoor / wet location, above cabinet, cove lighting, counter & architectural accents, under banisters, decks, gazebos, barbeque stations and wet bars.

Operating Voltage

24 VDC

IP67 Rated

Deemed fit enough to withstand dust, dirt and sand, and are resistant to submersion up to a maximum depth of 1m depth for up to 30 mins.

Average Life (L70)

50,000 Hours

Warranty

5 Years

Declare. RoHS



Technical Information


Model	Narrow		Asymmetric	
	SO	HO	SO	HO
Output Options				
Light Output (3000K)	415 lm/ft	625 lm/ft	310 lm/ft	557 lm/ft
Average Power Consumption (for a 4' section)	4.8 W/ft	5.8 W/ft	4.8 W/ft	5.2 W/ft
Efficacy	86 lm/W	106 lm/W	65 lm/W	108 lm/W
Ordering Increment (in)	6.5"		6.5"	8.5"
Max Strip Length (ft) (Max continuous strip length)	16 ft	16 ft	16 ft	16 ft
Max Run Length (in series)	20 ft	16 ft	20 ft	18 ft
Minimum Bending Radius	4.0"		4.0"	
Ambient Operating Temperature Range*	-5°F - 125°F (-20°C - 50°C)		-5°F - 125°F (-20°C - 50°C)	

CCT	Multiplier (referenced from 3000K)	TM-30			
		CRI	R _f	R _g	R _g
2700K	0.92	95	91	98	55
3000K	1.00	95	91	100	59
3500K	1.04	94	91	102	64
4000K	1.04	94	91	102	68


* Ambient Operating Temperature Range to maintain L70 of 50K+ hours in normal conditions. Exceeding Ambient Operating Temperature Range may result in decreased life/output. Consult Technical Support for specific inquiries.

Section Start/End Options

Symmetric Optic




Feed Type

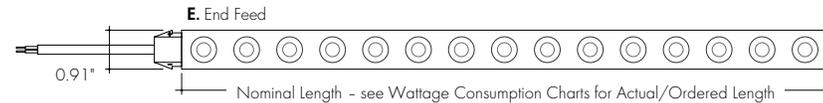




Connector Options



Asymmetric Optic



Feed Type

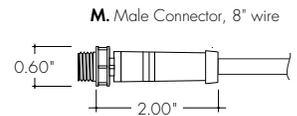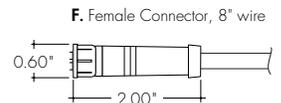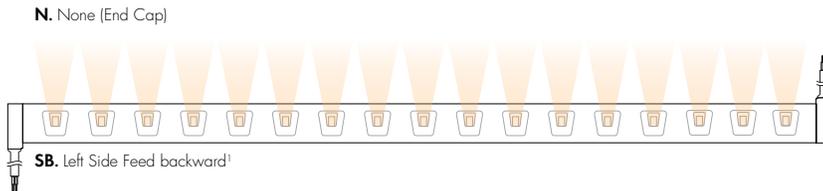


Ordering Code - 6 weeks typical lead time for F.O.T. strip

MODEL	OPTICS	OUTPUT	CCT	LEFT SIDE	LEFT TYPE	LEFT CONNECTOR	RIGHT SIDE	RIGHT TYPE	RIGHT CONNECTOR	LENGTH (IN)
FOT-FOT FLEX	NA-Narrow AS-Asymmetric	SO-Standard HO-High	27K-2700K 30K-3000K 35K-3500K 40K-4000K	L	E-End feed SF-Side feed forward ¹ SB-Side feed backward ¹ N-None (end cap) ²	M-Male F-Female L-Lead wires N-No feed ²	R	E-End feed SF-Side feed forward ¹ SB-Side feed backward ¹ N-None (end cap) ²	M-Male F-Female L-Lead wires N-No feed ²	View table above for increment options, max strip length limits, and max run length limits.

1 - Side feeds are incompatible (too wide) with extrusions, available for F.O.T. strip only.
2 - None and No Feed selections must and can only be used together (LNN or RNN).


F.O.T. Extrusions

Compatible Extrusions

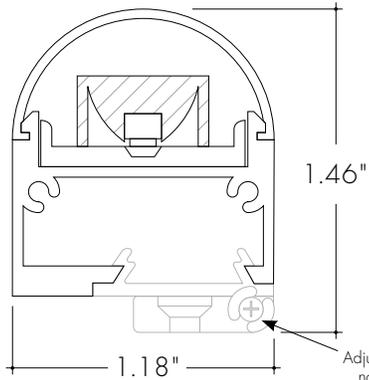

FOT Channel, 96 inches, Clear Round Lens


FOTC-R-96-C-SA

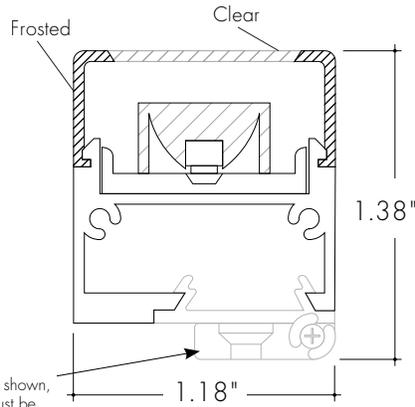

FOT Channel, 96 inches, Square Lens

FOTC-S-96-C-SA

Not Suitable for Asymmetric FOT; use Narrow optic FOT only in these extrusions.

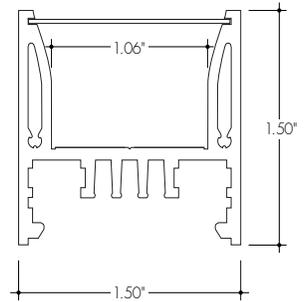


Kilo Channel

KILOC-144-[LENS]-[FINISH]

See Kilo Channel specification sheet for channel detail, options, and accessories. Not Suitable for Asymmetric FOT; use Narrow optic FOT only in these extrusions.


F.O.T. Extrusions Accessories (not compatible with Kilo extrusion)

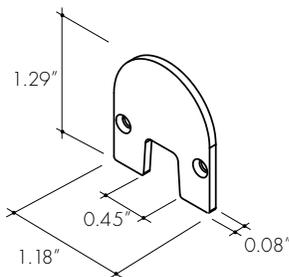

Round Endcap

EC-FOTC-R-H3-SA


Endcap for channels utilizing the round lens.

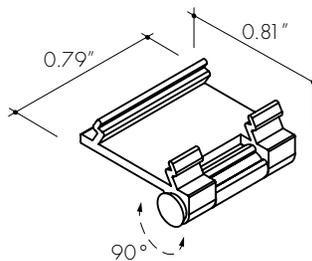

Adjustable Bracket

MB-FOTC-A-SA

Recommended every 1.5' of channel.

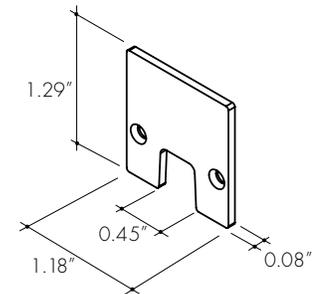


Square Endcap

EC-FOTC-S-H3-SA

Endcap for channels utilizing the square lens.


F.O.T. Accessories



Mounting Bracket

MB-FOT-FLEX


Recommended every 20', when not using a channel.



Splice Box

LVSP-WET

Wet rated, low voltage splice box, gray.

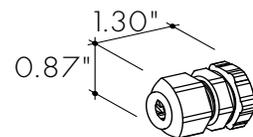


Connector

LVSP-WET-CM

Low voltage splice box wet cable, management gray.

Photometry


FOTNA-SO-30K

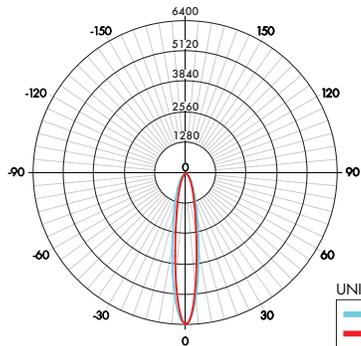

Zonal Lumen Summary


Zone	Lumen	% Fixture
0-30	1,356	75.5%
0-40	1,519	84.6%
0-60	1,659	92.3%
0-90	1,738	96.8%
0-180	1,796	100.0%

Total



UNIT: CD
 C0/180
 C90/270


FOTNA-HQ-30K

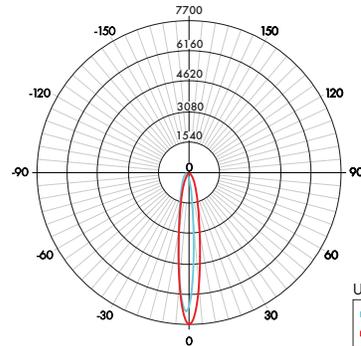

Zonal Lumen Summary


Zone	Lumen	% Fixture
0-30	1,657	72.3%
0-40	1,886	82.2%
0-60	2,074	90.5%
0-90	2,189	95.5%
0-180	2,292	100.0%

Total



UNIT: CD
 C0/180
 C90/270


FOTAS-SO-3000K

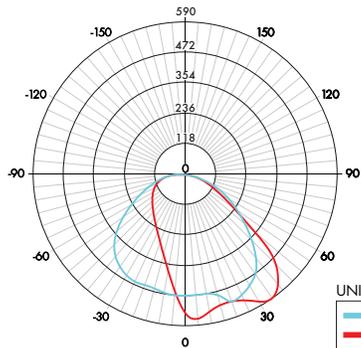

Zonal Lumen Summary


Zone	Lumen	% Fixture
0-30	364	26.9%
0-40	616	45.5%
0-60	1,082	80.0%
0-90	1,301	96.2%
0-180	1,352	100.0%

Total



UNIT: CD
 C0/180
 C90/270

FOTAS-HQ-3000K

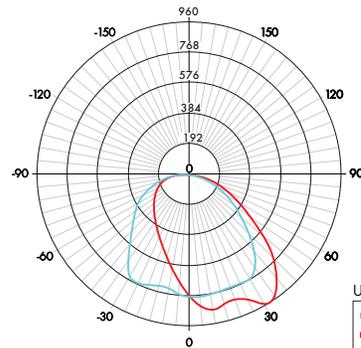

Zonal Lumen Summary

Zone	Lumen	% Fixture
0-30	558	28.4%
0-40	914	46.5%
0-60	1,564	79.6%
0-90	1,894	96.4%
0-180	1,966	100.0%

Total




UNIT: CD
 C0/180
 C90/270

FOT-NA-SO | Power Consumption

Based on operation with PS-UNI series of power supplies. Use Actual Length for Order Code Entry.
 A - No Connector at one end of FOT and Side Feed (SF or SB) at other end of FOT (0.22" + 0.50" added to overall length)
 B - No Connector at one end of FOT and End Connector at other end of FOT (0.22" + 0.83" added to overall length)
 C - End Connector at one end of FOT and Side Feed (SF or SB) at other end of FOT (0.83" + 0.50" added to overall length)
 D - End Connector at both ends of FOT (0.83" + 0.83" added to overall length)
 E - Side Feed (SF or SB) at one end of FOT and Side Feed (SF or SB) at other end of FOT (0.22" + 0.22" added to overall length)

Nominal Length (in)	Actual Length (in)					
	W	A	B	C	D	E
6.6	2.5	7.3	7.7	8.0	8.3	7.6
(1 ft) 13.1	5.0	13.8	14.2	14.5	14.8	14.1
19.7	7.5	20.4	20.8	21.1	21.4	20.7
(2 ft) 26.2	10.0	26.9	27.3	27.6	27.9	27.2
32.8	12.5	33.5	33.9	34.2	34.5	33.8
(3 ft) 39.4	15.0	40.1	40.5	40.8	41.1	40.4
(4 ft) 45.9	17.5	46.6	47.0	47.3	47.6	46.9
52.5	20.0	53.2	53.6	53.9	54.2	53.5
(5 ft) 59	22.5	59.7	60.1	60.4	60.7	60.0
65.6	25.0	66.3	66.7	67.0	67.3	66.6
(6 ft) 72.1	27.5	72.8	73.2	73.5	73.8	73.1
78.7	30.0	79.4	79.8	80.1	80.4	79.7
(7 ft) 85.3	32.5	86.0	86.4	86.7	87.0	86.3
91.8	35.0	92.5	92.9	93.2	93.5	92.8
(8 ft) 98.4	37.5	99.1	99.5	99.8	100.1	99.4
104.9	40.0	105.6	106.0	106.3	106.6	105.9
(9 ft) 111.5	42.5	112.2	112.6	112.9	113.2	112.5
(10 ft) 118.1	45.0	118.8	119.2	119.5	119.8	119.1
124.6	47.5	125.3	125.7	126.0	126.3	125.6
(11 ft) 131.2	50.0	131.9	132.3	132.6	132.9	132.2
137.7	52.5	138.4	138.8	139.1	139.4	138.7
(12 ft) 144.3	55.0	145.0	145.4	145.7	146.0	145.3
150.9	57.5	151.6	152.0	152.3	152.6	151.9
(13 ft) 157.4	60.0	158.1	158.5	158.8	159.1	158.4
164	62.5	164.7	165.1	165.4	165.7	165.0
(14 ft) 170.5	65.0	171.2	171.6	171.9	172.2	171.5
(15 ft) 177.1	67.5	177.8	178.2	178.5	178.8	178.1
183.7	70.0	184.4	184.8	185.1	185.4	184.7
(16 ft) 190.2	72.5	190.9	191.3	191.6	191.9	191.2

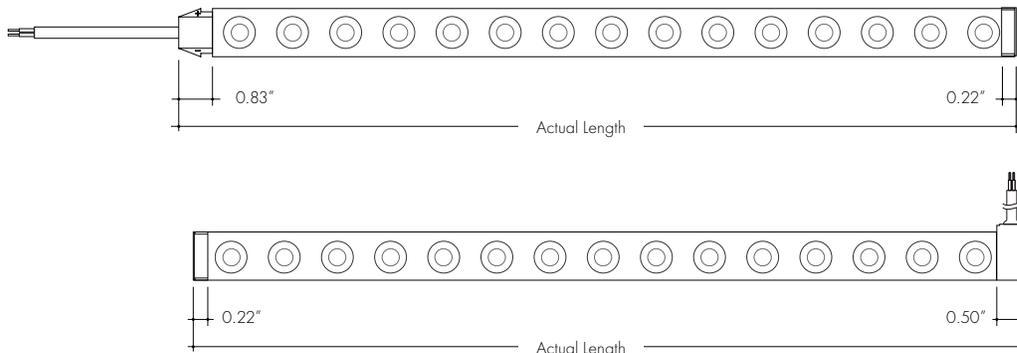

FOT-NA-HO | Power Consumption

Based on operation with PS-UNI series of power supplies. Use Actual Length for Order Code Entry.

A - No Connector at one end of FOT and Side Feed (SF or SB) at other end of FOT (0.22" + 0.50" added to overall length)


B - No Connector at one end of FOT and End Connector at other end of FOT (0.22" + 0.83" added to overall length)

C - End Connector at one end of FOT and Side Feed (SF or SB) at other end of FOT (0.83" + 0.50" added to overall length)

D - End Connector at both ends of FOT (0.83" + 0.83" added to overall length)

E - Side Feed (SF or SB) at one end of FOT and Side Feed (SF or SB) at other end of FOT (0.22" + 0.22" added to overall length)


Nominal Length (in)	Actual Length (in)					
	W	A	B	C	D	E
6.6	3.2	7.3	7.7	8.0	8.3	7.6
(1 ft) 13.1	6.4	13.8	14.2	14.5	14.8	14.1
19.7	9.6	20.4	20.8	21.1	21.4	20.7
(2 ft) 26.2	12.8	26.9	27.3	27.6	27.9	27.2
32.8	16.0	33.5	33.9	34.2	34.5	33.8
(3 ft) 39.4	19.2	40.1	40.5	40.8	41.1	40.4
(4 ft) 45.9	22.4	46.6	47.0	47.3	47.6	46.9
52.5	25.6	53.2	53.6	53.9	54.2	53.5
(5 ft) 59	28.8	59.7	60.1	60.4	60.7	60.0
65.6	32.0	66.3	66.7	67.0	67.3	66.6
(6 ft) 72.1	35.2	72.8	73.2	73.5	73.8	73.1
78.7	38.4	79.4	79.8	80.1	80.4	79.7
(7 ft) 85.3	41.6	86.0	86.4	86.7	87.0	86.3
91.8	44.8	92.5	92.9	93.2	93.5	92.8
(8 ft) 98.4	48.0	99.1	99.5	99.8	100.1	99.4
104.9	51.2	105.6	106.0	106.3	106.6	105.9
(9 ft) 111.5	54.4	112.2	112.6	112.9	113.2	112.5
(10 ft) 118.1	57.6	118.8	119.2	119.5	119.8	119.1
124.6	60.8	125.3	125.7	126.0	126.3	125.6
(11 ft) 131.2	64.0	131.9	132.3	132.6	132.9	132.2
137.7	67.2	138.4	138.8	139.1	139.4	138.7
(12 ft) 144.3	70.4	145.0	145.4	145.7	146.0	145.3
150.9	73.6	151.6	152.0	152.3	152.6	151.9
(13 ft) 157.4	76.8	158.1	158.5	158.8	159.1	158.4
164	80.0	164.7	165.1	165.4	165.7	165.0
(14 ft) 170.5	83.2	171.2	171.6	171.9	172.2	171.5
(15 ft) 177.1	86.4	177.8	178.2	178.5	178.8	178.1
183.7	89.6	184.4	184.8	185.1	185.4	184.7
(16 ft) 190.2	92.8	190.9	191.3	191.6	191.9	191.2

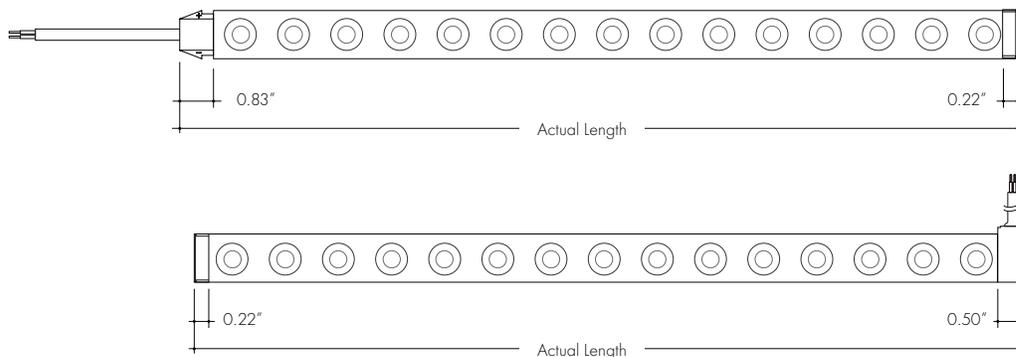

FOT-AS-SO | Power Consumption

Based on operation with PS-UNI series of power supplies. Use Actual Length for Order Code Entry.
 A - No Connector at one end of FOT and Side Feed (SF or SB) at other end of FOT (0.22" + 0.50" added to overall length)
 B - No Connector at one end of FOT and End Connector at other end of FOT (0.22" + 0.83" added to overall length)
 C - End Connector at one end of FOT and Side Feed (SF or SB) at other end of FOT (0.83" + 0.50" added to overall length)
 D - End Connector at both ends of FOT (0.83" + 0.83" added to overall length)
 E - Side Feed (SF or SB) at one end of FOT and Side Feed (SF or SB) at other end of FOT (0.22" + 0.22" added to overall length)


Nominal Length (in)	Actual Length (in)					
	W	A	B	C	D	E
6.6	2.5	7.3	7.7	8.0	8.3	7.6
(1 ft) 13.1	5.0	13.8	14.2	14.5	14.8	14.1
19.7	7.5	20.4	20.8	21.1	21.4	20.7
(2 ft) 26.2	10.0	26.9	27.3	27.6	27.9	27.2
32.8	12.5	33.5	33.9	34.2	34.5	33.8
(3 ft) 39.4	15.0	40.1	40.5	40.8	41.1	40.4
(4 ft) 45.9	17.5	46.6	47.0	47.3	47.6	46.9
52.5	20.0	53.2	53.6	53.9	54.2	53.5
(5 ft) 59	22.5	59.7	60.1	60.4	60.7	60.0
65.6	25.0	66.3	66.7	67.0	67.3	66.6
(6 ft) 72.1	27.5	72.8	73.2	73.5	73.8	73.1
78.7	30.0	79.4	79.8	80.1	80.4	79.7
(7 ft) 85.3	32.5	86.0	86.4	86.7	87.0	86.3
91.8	35.0	92.5	92.9	93.2	93.5	92.8
(8 ft) 98.4	37.5	99.1	99.5	99.8	100.1	99.4
104.9	40.0	105.6	106.0	106.3	106.6	105.9
(9 ft) 111.5	42.5	112.2	112.6	112.9	113.2	112.5
(10 ft) 118.1	45.0	118.8	119.2	119.5	119.8	119.1
124.6	47.5	125.3	125.7	126.0	126.3	125.6
(11 ft) 131.2	50.0	131.9	132.3	132.6	132.9	132.2
137.7	52.5	138.4	138.8	139.1	139.4	138.7
(12 ft) 144.3	55.0	145.0	145.4	145.7	146.0	145.3
150.9	57.5	151.6	152.0	152.3	152.6	151.9
(13 ft) 157.4	60.0	158.1	158.5	158.8	159.1	158.4
164	62.5	164.7	165.1	165.4	165.7	165.0
(14 ft) 170.5	65.0	171.2	171.6	171.9	172.2	171.5
(15 ft) 177.1	67.5	177.8	178.2	178.5	178.8	178.1
183.7	70.0	184.4	184.8	185.1	185.4	184.7
(16 ft) 190.2	72.5	190.9	191.3	191.6	191.9	191.2

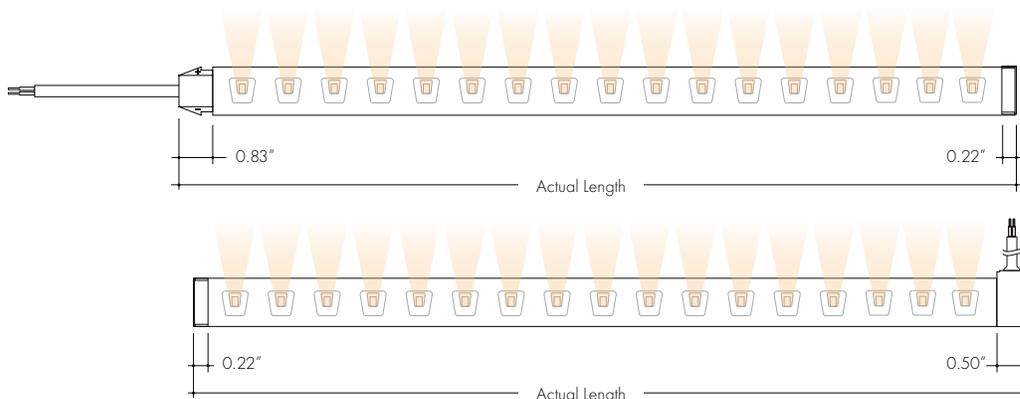

FOT-AS-HO | Power Consumption

Based on operation with PS-UNI series of power supplies. Use Actual Length for Order Code Entry.
 A - No Connector at one end of FOT and Side Feed (SF or SB) at other end of FOT (0.22" + 0.50" added to overall length)
 B - No Connector at one end of FOT and End Connector at other end of FOT (0.22" + 0.83" added to overall length)
 C - End Connector at one end of FOT and Side Feed (SF or SB) at other end of FOT (0.83" + 0.50" added to overall length)
 D - End Connector at both ends of FOT (0.83" + 0.83" added to overall length)
 E - Side Feed (SF or SB) at one end of FOT and Side Feed (SF or SB) at other end of FOT (0.22" + 0.22" added to overall length)

Nominal Length (in)	Actual Length (in)					
	W	A	B	C	D	E
(1 ft) 8.5	3.2	9.2	9.6	9.9	10.2	9.5
16.9	6.4	17.6	18.0	18.3	18.6	17.9
(2 ft) 25.4	9.6	26.1	16.5	16.8	27.1	26.4
(3 ft) 33.9	12.8	34.6	35.0	35.3	35.6	34.9
42.3	16.0	43.0	43.4	43.7	44.0	43.3
(4 ft) 50.8	19.2	51.5	51.9	52.2	52.5	51.8
(5 ft) 59.3	22.4	60.0	60.4	60.7	61.0	60.3
67.7	25.6	68.4	68.8	69.1	69.4	68.7
(6 ft) 76.2	28.8	76.9	77.3	77.6	77.9	77.2
(7 ft) 84.6	32.0	85.3	85.7	86.0	86.3	85.6
(8 ft) 93.1	35.2	93.8	94.2	94.5	94.8	94.1
101.6	38.4	102.3	102.7	103.0	103.3	102.6
(9 ft) 110.0	41.6	110.7	111.1	111.4	111.7	111.0
(10 ft) 118.5	44.8	119.2	119.6	119.9	120.2	119.5
127	48.0	127.7	128.1	128.4	128.7	128.0
(11 ft) 135.4	51.2	136.1	136.5	136.8	137.1	136.4
(12 ft) 143.9	54.4	144.6	145.0	145.3	145.6	144.9
(13 ft) 152.4	57.6	153.1	153.5	153.8	154.1	153.4
160.8	60.8	161.5	161.9	162.2	162.5	161.8
(14 ft) 169.3	64.0	170.0	170.4	170.7	171.0	170.3
(15 ft) 177.8	67.2	178.5	178.9	179.2	179.5	178.8
186.2	70.4	186.9	187.3	187.6	187.9	187.2
(16 ft) 194.6	73.6	195.3	195.7	196.0	196.3	195.6

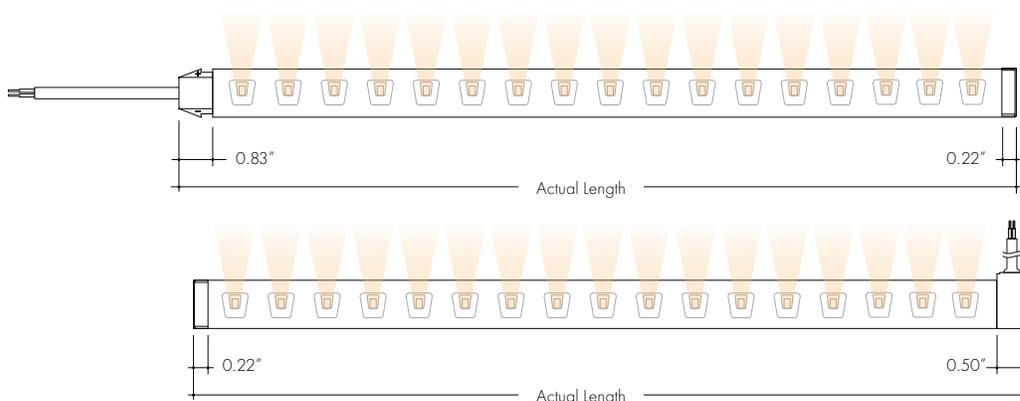

Voltage Drop Calculator

The below chart assumes nominal voltage of 24 Volts and a Voltage Drop Allowance of 3% through the wire

Wattage [W]	Maximum Wire Length From Power Supply to Start of Run [ft]						
	12 AWG	14 AWG	16 AWG	18 AWG	20 AWG	22 AWG	24 AWG
5	1088.2	684.4	430.3	270.6	170.2	107.1	67.3
10	544.1	342.2	215.1	135.3	85.1	53.5	33.7
15	362.7	228.1	143.4	90.2	56.7	35.7	22.4
20	272.0	171.1	107.6	67.7	42.6	26.8	16.8
25	217.6	136.9	86.1	54.1	34.0	21.4	13.5
30	181.4	114.1	71.7	45.1	28.4	17.8	11.2
35	155.5	97.8	61.5	38.7	24.3	15.3	9.6
40	136.0	85.5	53.8	33.8	21.3	13.4	8.4
45	120.9	76.0	47.8	30.1	18.9	11.9	7.5
50	108.8	68.4	43.0	27.1	17.0	10.7	6.7
55	98.9	62.2	39.1	24.6	15.5	9.7	6.1
60	90.7	57.0	35.9	22.6	14.2	8.9	5.6
65	83.7	52.6	33.1	20.8	13.1	8.2	5.2
70	77.7	48.9	30.7	19.3	12.2	7.6	4.8
75	72.5	45.6	28.7	18.0	11.3	7.1	4.5
80	68.0	42.8	26.9	16.9	10.6	6.7	4.2
85	64.0	40.3	25.3	15.9	10.0	6.3	4.0
90	60.5	38.0	23.9	15.0	9.5	5.9	3.7
96	56.7	35.6	22.4	14.1	8.9	5.6	3.5

Power Supplies

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

For use with Static White



Ordering Code - Universal Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	WATTAGE	OUTPUT
PS-Power Supply, 120-277VAC	UNI - 0-10V Dimming (0.1%), Phase Dimming (0.1%)	30 - 30 Watts 60 - 60 Watts 96 - 96 Watts 3x96 - 3x96 Watts	24 - 24 VDC

Compatibility: View a complete list of compatible dimmers on the PS-UNI product page.

0-10V - 0.1% dimming
MLV/ELV/TRIAC - 0.1% dimming, consult dimming compatibility chart

MODELS	PS-UNI-30W	PS-UNI-60W	PS-UNI-96W	PS-UNI-3X96W
Length	6.50"	7.40"	8.66"	11.85"
Width	3.73"	3.73"	3.73"	4.32"
Depth	1.61"	1.61"	1.61"	1.81"

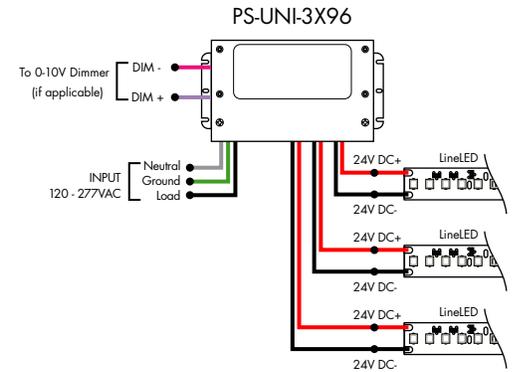
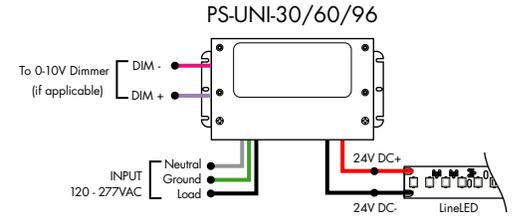


For use with Static White

Ordering Code - 0-10V Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS-Power Supply, 120-277VAC	010V-LIN - 0-10V Dimming (0.1%), Linear 010V-LOG - 0-10V Dimming (0.1%), Logarithmic	D-Dry	96 - 96 Watts 3x96 - 3x96 Watts	24 - 24 VDC

MODELS	96W	3X96
Length	14.40"	15.00"
Width	5.20"	6.62"
Depth	2.60"	4.45"

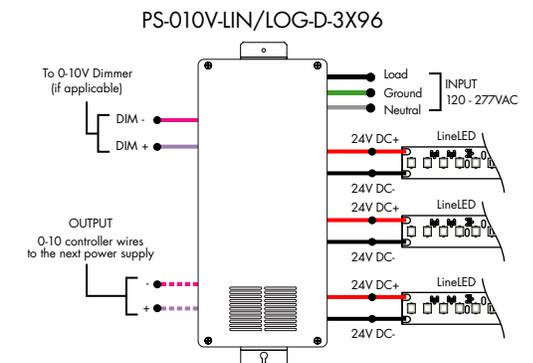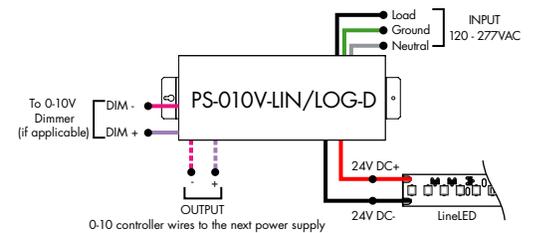


Power Supplies

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

For use with Static White

Ordering Code - Athena 0-10V LED Driver

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT	FEATURE
PS - Power Supply, 120-277VAC	010V-LIN - 0-10V Dimming (0.1%), Linear 010V-LOG - 0-10V Dimming (0.1%), Logarithmic	D-Dry	96-96 Watts	24 - 24 VDC	AWNDR - Athena

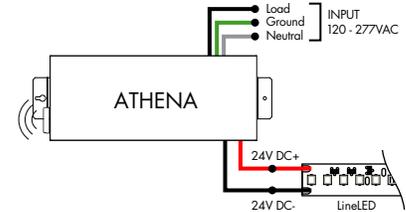


MODELS	96W
Length	14.40"
Width	5.20"
Depth	2.60"

For use with Static White

Ordering Code - DALI 2 Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS - Power Supply, 120-277VAC	DALI2-DT6 - DALI2 DT6 (0.1%)	D-Dry	96-96 Watts	24 - 24 VDC

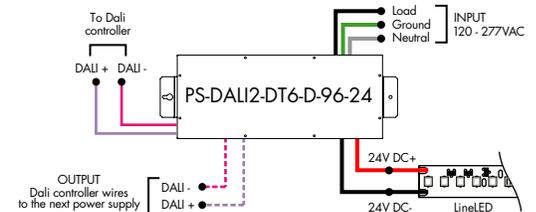


Model	96W
Length	14.40"
Width	5.20"
Depth	2.60"


For use with Static White

Ordering Code - DALI Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS - Power Supply, 120-277VAC	DALI - DALI (0.1%)	D-Dry	96-96 Watts 3x96 - 3x96 Watts	24 - 24 VDC

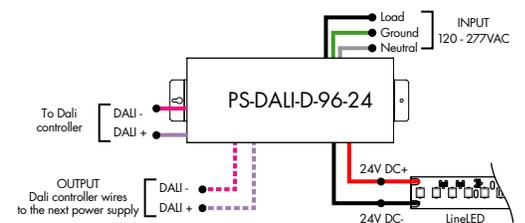

Model	96W	3X96
Length	14.40"	15.00"
Width	5.20"	6.62"
Depth	2.60"	4.56"

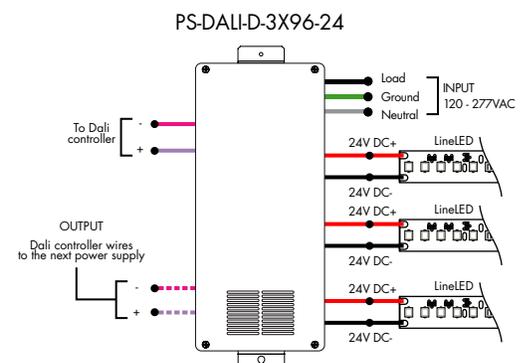

Power Supplies

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.



For use with Static White

Ordering Code - DMX Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS-Power Supply, 120-277VAC	DMX-DMX (0.1%)	D-Dry	96-96 Watts 3x96-3x96 Watts	24-24 VDC

MODELS	96W	3X96
Length	14.40"	15.00"
Width	5.20"	6.62"
Depth	2.60"	4.56"

ZONAL CONTROL POWER SUPPLIES.
CONTROL MULTIPLE TAPES/ZONES USING DMX CHANNELS.

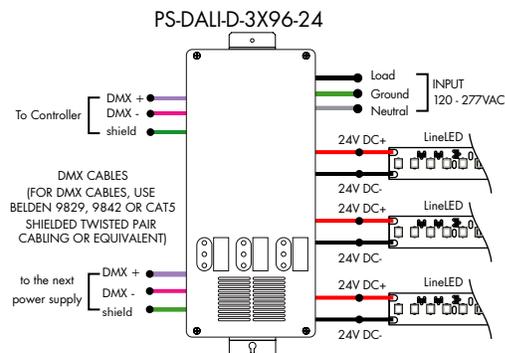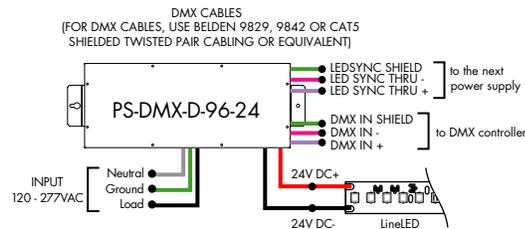


For use with Static White

Ordering Code - Non-Dimming Power Supply, 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS-Power Supply, 120-277VAC	ND-Non Dimming	D-Dry	96-96 Watts	24-24 VDC

MODELS	96W
Length	14.40"
Width	5.20"
Depth	2.60"

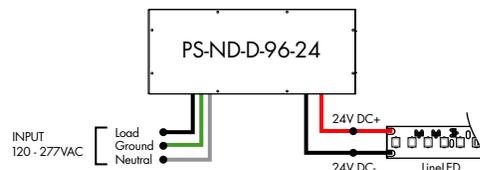


For use with Static White

Ordering Code - In-Ground Power Supplies

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS120-Power Supply, 120VAC PS240-Power Supply, 240VAC PS277-Power Supply, 277VAC	ELV-ELV Dimming (1%)	IG-In Ground	2X96-2X96 Watts	24-24 VDC

MODELS	2X96W
Length	8.40"
Width	8.30"
Depth	8.10"

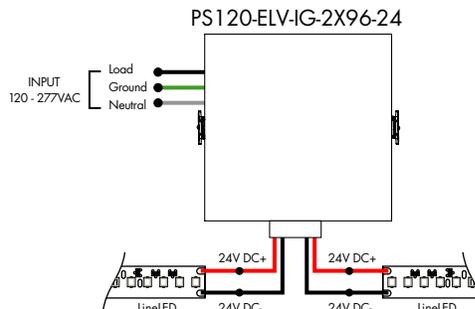

Power Supplies

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.



Luminii is a Lutron OEM Advantage Partner


Lutron Power Supplies 1%

MODEL

L3DA4U1UKL-CV240

HiLume™ 1% EcoSystem Voltage LED driver 40W max

MODELS	L3DA4U1UKL-CV240
Length	4.98"
Width	4.00"
Depth	2.62"

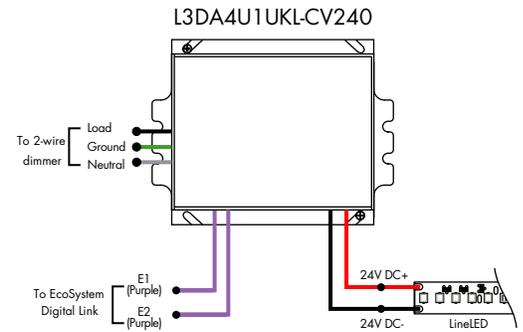

Luminii is a Lutron OEM Advantage Partner

Lutron Power Supplies 0.1%

MODEL

L3D0-96W24V-U

HiLume™ 0.1% EcoSystem Voltage LED Driver with Soft-On, Fade-to-Black™ 96W max

MODELS	L3D0
Length	10.50"
Width	5.50"
Depth	2.00"

