



Hera - Acrylic Globe Pendant Light Fixture. The Hera is a timeless classic, with modern efficiency. This LED pendant radiates warmth, and provides even light distribution from the LED light source.

Ordering Code

Fixture	1	2	3	4	5	6	7	8
Driver	1	2	3	4	5	6	7	8

Product Specifications

SAMPLE: Fixture 710 - A90 - 30 - 01 | Driver 951 - 01 - 00 - 01 - STD - 120 - A90 - 07

1 - Model	2 - LED	3 - CCT	4 - Bottom Cap	1 - Canopy Style	2 - Canopy Color
710 · 10" 700lm (4.5W) 712 · 12" 1000lm (6.6W) 716 · 16" 1300lm (9.5W) 720 · 20" 1500lm (10.6W)	WD · 90 CRI Warm Dim	30 · 3000K dimmed to 1800K	01 · White XX · Custom	951 · Round 952 · Square	01 · White 02 · Black 08 · Silver XX · Custom
3 - Suspension (6' incl.)	4 - Feed Cable	5 - Driver	Dim Level	Dim Level	6 - Voltage
00 · Feed Cable 01 · 1 Aircraft + Feed Cable 03 · Solid Stem (6' Max) Specify length in inches	01 · White 02 · Black 03 · Clear XX · Custom	STD · Non Dimming LCS · 0 - 10 Volt Protocol DIM · Phase ¹ ELDOLC · EldoLED 0 - 10 Volt ² DALI · DALI Protocol ²	N/A 1% 1% 0.1% 0.1%	LUTES · Hilume Ecodigital ^{1/2} LUT2W · 2 Wire for phase ^{1/2} DMX · Senso ³ EMG · Emergency Driver ^{3/4} CSMB · Casambi Wireless Control ^{3/4}	120 · 120V 277 · 277V 347 · 347V ^{3/4}
7 - LED	8 - Lumen				
Same as Fixture	Same as Fixture	<small>*1 120V only *2 requires square canopy *3 remote mount *4 second driver required *5 not available with DALI, Lutron or DMX</small>			
		Project : _____ Quantity : _____ Type : _____ Notes : _____			

Light Engine

Output: up to 1500lm

High Efficacy: up to 98 lumen/Watt

Color Temperature (CCT): 3000K dimmed to 1800K

Color Consistency: Range within a 3-MacAdam Ellipse

Color rendering (CRI): 90 CRI

Driver

Dimming: 1% dimming standard with 0.1% option

Dimmer switch must be capable of dimming less than 5% (Lutron DIVA is recommended)

Ripple: Industry leading Low ripple

Efficiency: Power Factor >0.9

Efficiency over 85%

Class 2 output for safety

Installation: Small Footprint allows retrofit installations

Canopy

Round Canopy

W - Ø5.17" [131.24 mm]

H - 2.36" [60mm]



Square Canopy

W/L - 5.57" [141.5mm]

H - 2.28" [58mm]



Suspension


Suspended by Feed Cable



Single Aircraft Cable



Suspended by Solid Stem




Installation

- Suspended using aircraft cable. Fully height adjustable
- Factory assembled for easy and fast installation
- Canopy included, fits on standard junction box

Construction / Finish

- Uninterrupted acrylic sphere
- Height adjustable aircraft cable suspension system
- Aircraft cable and electric wire included

Dimensions

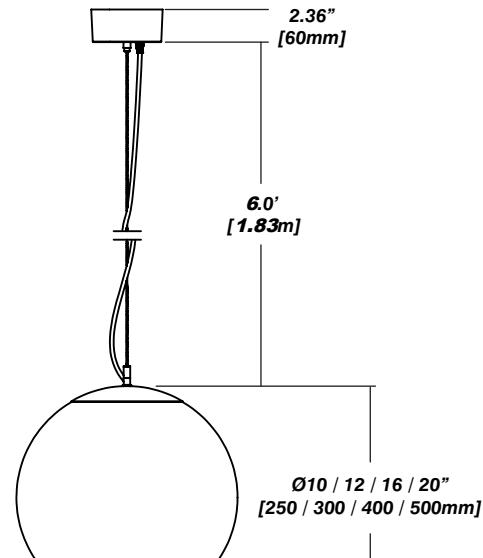

Bottom Cap

- High quality machined aluminum
- Available in durable custom finishes

