


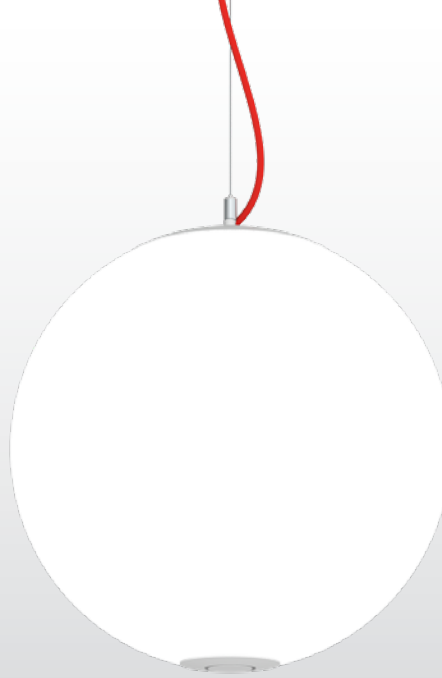

Hera - Acrylic Globe Pendant Light Fixture. The Hera is a timeless classic, with modern efficiency. This LED pendant radiates warmth, and provides even light distribution from the LED light source.

Ordering Code

Fixture

1

2

3

4

Driver

1

2

3

4

5

6

7

8

Product Specifications

SAMPLE: Fixture **710 - A90 - 27 - 01** | Driver **951 - 01 - 00 - 01 - STD - 120 - A90 - 07**

1 - Model	2 - LED	3 - CCT	4 - Bottom Cap	1 - Canopy Style	2 - Canopy Color	3 - Suspension (6' incl.)
710 • 10" up to 1500lm 712 • 12" up to 1500lm 716 • 16" up to 2000lm 720 • 20" up to 2000lm <i>See page 2 for lumen options</i>	A90 • 93+ CRI Accuracy	25 • 2500K 27 • 2700K 30 • 3000K 35 • 3500K 40 • 4000K 65 • 6500K	01 • White XX • Custom	951 • Round 952 • Square	01 • White 02 • Black 08 • Silver XX • Custom	00 • Feed Cable 01 • 1 Aircraft + Feed Cable 03 • Solid Stem (6' Max) <i>Specify length in inches</i>
4 - Feed Cable	5 - Driver	Dim Level	Dim Level	6 - Voltage	7 - LED	8 - Lumen
01 • White 02 • Black 03 • Clear XX • Custom	STD • Non Dimming LCS • 0 - 10 Volt Protocol DIM • Phase* ¹ ELDOLC • EldoLED 0 - 10 Volt* ² DALI • Dali Protocol* ²	N/A 1% 1% 0.1% 0.1%	LUTES • Hilume Ecodigital* ² LUT2W • 2 Wire for phase* ^{1/2} DMX • DMX Driver* ³ EMG • Emergency Driver* ^{3/4} CSMB • Casambi Wireless Control* ^{3/4}	1% 1%	120 • 120V 277 • 277V 347 • 347V* ^{3/5}	Same as Fixture Same as Fixture

*1 120V only

*2 requires square canopy

*3 remote mount

*4 second driver required

*5 not available with DALI, Lutron or DMX

Project : _____

Quantity : _____

Type : _____

Notes : _____

Light Engine

- Output:** up to 2500lm
- High Efficacy:** up to 86 lumen/Watt
- Color Options (CCT):** 2500K, 2700K, 3000K, 3500K, 4000K, or 6500K
- Color Consistency:** Range within a 1 x 2 MacAdam Ellipse
- Color rendering (CRI):** 93+ CRI

Power Consumption

Lumen Option	700lm	1000lm	1500lm	2000lm
Fixture Wattage	9.1W	14W	22W	N/A
Delivered Lumen 10"	716lm	1055lm	1465lm	N/A
Delivered Lumen 12"	716lm	1055lm	1465lm	N/A
Fixture Wattage	8.2W	12.1W	19.8W	29.4W
Delivered Lumen 16"	684lm	969lm	1488lm	1938lm
Delivered Lumen 20"	698lm	1028lm	1559lm	1977lm


Installation

- Suspended using aircraft cable. Fully height adjustable
- Factory assembled for easy and fast installation
- Canopy included, fits on standard junction box

Construction / Finish

- Acrylic shade
- Height adjustable aircraft cable suspension system
- Aircraft cable and electric wire included

Dimensions

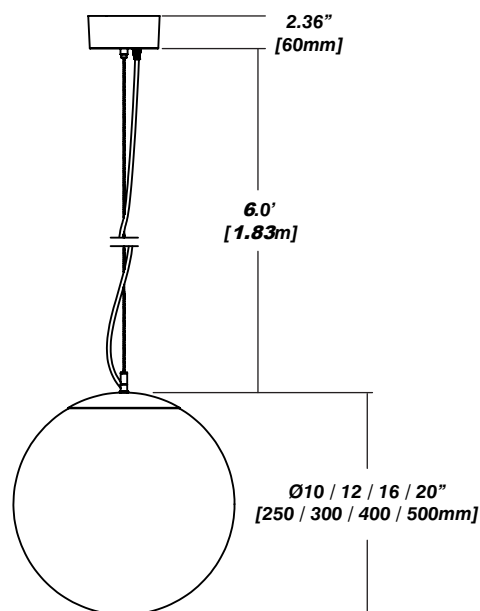

Canopy

Round Canopy

W - Ø5.17" [131.24 mm]
H - 2.36" [60mm]



Square Canopy

W/L - 5.57" [141.5mm]
H - 2.28" [58mm]




Bottom Cap

- High quality machined aluminum
- Available in durable custom finishes



Suspension

Suspended by Feed Cable



Single Aircraft Cable



Suspended by Solid Stem

