


Hero adjustable luminaire with LightShift technology allows for 40 degree tilt and 360 degree pan beam adjustment without moving or rotating the luminaire body. Harmonious integration into the architecture and flexible installation into the tightest spaces. Fixed light emitting face orientation, precision optics, adaptive glare baffle, and advanced anti-reflective materials provide for exceedingly low glare. Available with a wide range of beam characteristics, shapes, colors, and mounting configurations.

|                        |                                                   |                   |                                       |
|------------------------|---------------------------------------------------|-------------------|---------------------------------------|
| <b>Mounting</b>        | lighting junction box canopy                      | <b>Dimming</b>    | Phase 1%, 0-10V 1%/0.1%, or DALI 0.1% |
| <b>Size</b>            | 10 LED, 6 LED                                     | <b>Beam Angle</b> | 11°, 14°, 23°, 36°, 44°               |
| <b>Shape</b>           | rounded or rectangular                            | <b>Location</b>   | Dry and Damp                          |
| <b>Stem</b>            | field cut stem, up to 4' long, standard 7" offset | <b>Lifetime</b>   | 60,000 hours                          |
| <b>Operating Power</b> | 120-277 V, 50-60 Hz, power factor > 0.9           | <b>Warranty</b>   | 5 years                               |

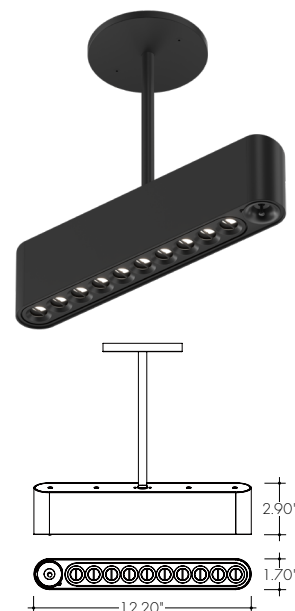

## Technical Information

| MODEL:                                                                | Hero                             |                                  |
|-----------------------------------------------------------------------|----------------------------------|----------------------------------|
| <b>Light Output (3000K)</b><br><small>*HO uses 1.2 multiplier</small> | SO                               | 1290 lm (10 LED), 775 lm (6 LED) |
|                                                                       | HO                               | 1548 lm (10 LED), 930 lm (6 LED) |
| <b>Efficacy</b>                                                       | 58 lm/W                          |                                  |
| <b>Color Temperature</b>                                              | 2700K, 3000K, 3500K, 4000K       |                                  |
| <b>CRI</b>                                                            | 92                               |                                  |
| <b>Wattage</b>                                                        | SO                               | 23W (10 LED), 14W (6 LED)        |
|                                                                       | HO                               | 28W (10 LED), 17W (6 LED)        |
| <b>Beam Tilt</b>                                                      | Rated to ±40 deg                 |                                  |
| <b>Beam Pan</b>                                                       | Infinite (360 Deg with no stops) |                                  |

| 10 LED |        |                |                |                |                |       |       |      |      |      |
|--------|--------|----------------|----------------|----------------|----------------|-------|-------|------|------|------|
| CCT    | Lumens | CRI            |                | TM-30          |                | CBCP  |       |      |      |      |
|        |        | R <sub>a</sub> | R <sub>g</sub> | R <sub>f</sub> | R <sub>g</sub> | LS11  | LS14  | LS23 | LS36 | LS44 |
| 2700K  | 1220   | 92             | 65             | 89             | 103            | 27712 | 18379 | 7206 | 3212 | 2375 |
| 3000K  | 1290   | 96             | 79             | 94             | 101            | 29252 | 19400 | 7606 | 3390 | 2507 |
| 3500K  | 1335   | 95             | 81             | 94             | 102            | 30330 | 20115 | 7886 | 3515 | 2599 |
| 4000K  | 1390   | 94             | 74             | 92             | 99             | 32724 | 21703 | 8509 | 3792 | 2805 |

| 6 LED |        |                |                |                |                |       |       |      |      |      |
|-------|--------|----------------|----------------|----------------|----------------|-------|-------|------|------|------|
| CCT   | Lumens | CRI            |                | TM-30          |                | CBCP  |       |      |      |      |
|       |        | R <sub>a</sub> | R <sub>g</sub> | R <sub>f</sub> | R <sub>g</sub> | LS11  | LS14  | LS23 | LS36 | LS44 |
| 2700K | 732    | 55             | 39             | 53             | 61             | 16627 | 1103  | 4323 | 1927 | 1425 |
| 3000K | 774    | 57             | 47             | 56             | 60             | 17551 | 11640 | 4563 | 2034 | 1504 |
| 3500K | 801    | 57             | 48             | 56             | 61             | 18198 | 12069 | 4731 | 2109 | 1599 |
| 4000K | 834    | 56             | 44             | 55             | 59             | 19634 | 13021 | 5105 | 2275 | 1683 |

\*HO multiplier = 1.2x


| BEAM             |      |      |      |      |      |
|------------------|------|------|------|------|------|
| Name             | LS11 | LS14 | LS23 | LS36 | LS44 |
| Width (Diameter) | 11°  | 14°  | 23°  | 36°  | 44°  |
| Field Angle      | 20°  | 25°  | 38°  | 59°  | 69°  |

## Ordering Code

| MODEL                                                           | TYPE                                                                                    | SHAPE                                                                                                                                                                                                                           | OUTPUT                                                | CCT                                                      | OPTIC                                                                                                                                                   | FINISH                   |
|-----------------------------------------------------------------|-----------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------|----------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|
| HER06 - Hero Adjustable 6 LED<br>HER10 - Hero Adjustable 10 LED | MP - Monopoint                                                                          | RD - Rounded Endcaps<br>SQ - Squared Endcaps                                                                                                                                                                                    | SO - Standard Output<br>HO - High Output <sup>1</sup> | 27K - 2700K<br>30K - 3000K<br>35K - 3500K<br>40K - 4000K | LS11 - 11 Degree LightShift<br>LS14 - 14 Degree LightShift<br>LS23 - 23 Degree LightShift<br>LS36 - 36 Degree LightShift<br>LS44 - 44 Degree LightShift | WH - White<br>BK - Black |
| CANOPY SHAPE                                                    | STEM CONFIGURATION                                                                      | DRIVER                                                                                                                                                                                                                          |                                                       |                                                          |                                                                                                                                                         |                          |
| RD4 - 4" Round Canopy                                           | SSS - Straight Stem Standard (7")<br>SS2 - Straight Stem, 2"<br>SS4 - Straight Stem, 4" | PHSD - Forward/Reverse Phase, 1% Dim, 120V <sup>2</sup><br>O10S - 0-10V, 1% Dim, 120V/277V<br>O10L - eldoLED, 0-10V, Linear, 0.1% Dim<br>O10G - eldoLED, 0-10V, Log, 0.1% Dim<br>DALI - eldoLED, Dali Protocol 2, DT6, 0.1% Dim |                                                       |                                                          |                                                                                                                                                         |                          |

1. HO 1.2x multiplier  
2. Not compatible with HERO6

## Product Dimensions

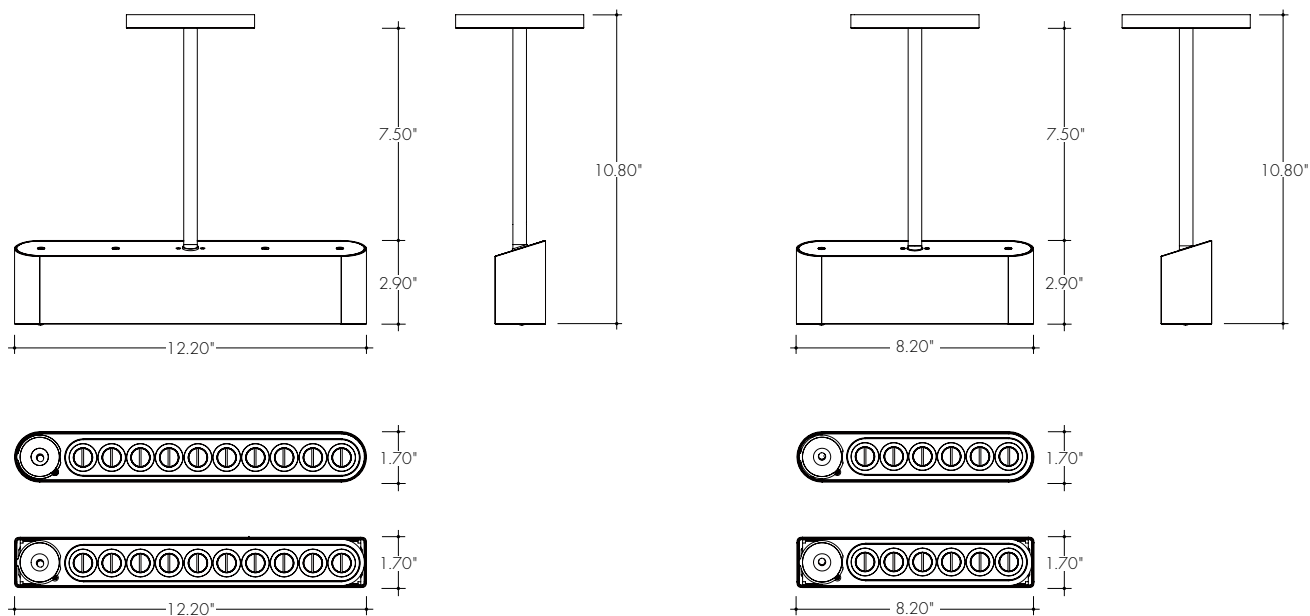

## Shape

**RD**  
Rounded Endcaps



**SQ**  
Squared Endcaps




## Finish

**BK**  
Black



**WH**  
White




## Photometry











### A-Downlight



### B-30 Degree Beam Adjustment

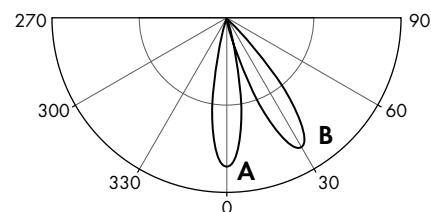

\*Beam steering achieved with intuitive joystick movement.



## Family

---

