
Hero Track
LightShift Adjustable Luminaire

glint by luminii

Hero adjustable luminaire with LightShift technology allows for 40 degree tilt and 360 degree pan beam adjustment without moving or rotating the luminaire body. Harmonious integration into the architecture and flexible installation into the tightest spaces. Fixed light emitting face orientation, precision optics, adaptive glare baffle, and advanced anti-reflective materials provide for exceedingly low glare. Available with a wide range of beam characteristics, shapes, colors, and mounting configurations.

Track Adapter	2 circuit,data bus and 277 V optional	**Dimming**	Phase 1%, 0-10V 1%/0.1%, or DALI 0.1%
Size	10 LED, 6 LED	**Beam Angle**	11°, 14°, 23°, 36°, 44°
Shape	rounded or rectangular	**Location**	Dry and Damp
Stem	8" standard(front to track), 4" optional	**Lifetime**	60,000 hours
Operating Power	120-277 V, 50-60 Hz, power factor > 0.9	**Warranty**	5 years

c UL us LISTED · MADE IN U.S.A · FC · Declare · TITLE 24 JA8 COMPLIANT

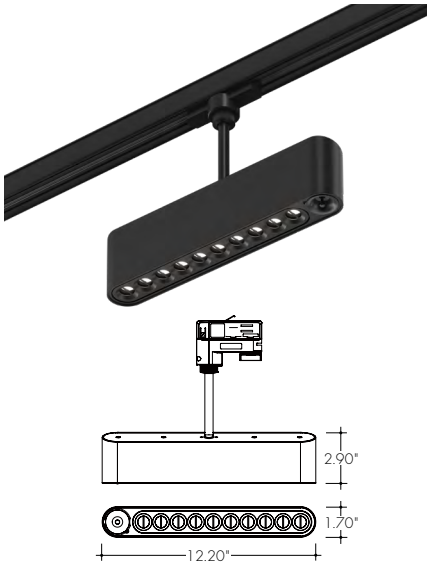

Technical Information

MODEL:		Hero
Light Output (3000K) *HO uses 1.2 multiplier	SO	1290 lm (10 LED), 775 lm (6 LED)
	HO	1548 lm (10 LED), 930 lm (6 LED)
Efficacy		58 lm/W
Color Temperature		2700K, 3000K, 3500K, 4000K
CRI		92
Wattage	SO	23W (10 LED), 14W (6 LED)
	HO	28W (10 LED), 17W (6 LED)
Beam Tilt		Rated to ±40 deg
Beam Pan		Infinite (360 Deg with no stops)
Compatibility		UL listed compatible with Global, Stucchi and Eutrac systems

10 LED

CCT	Lumens	CRI		TM-30		CBCP				
		R_a	R_9	R_f	R_g	LS11	LS14	LS23	LS36	LS44
2700K	1220	92	65	89	103	27712	18379	7206	3212	2375
3000K	1290	96	79	94	101	29252	19400	7606	3390	2507
3500K	1335	95	81	94	102	30330	20115	7886	3515	2599
4000K	1390	94	74	92	99	32724	21703	8509	3792	2805

6 LED

CCT	Lumens	CRI		TM-30		CBCP				
		R_a	R_9	R_f	R_g	LS11	LS14	LS23	LS36	LS44
2700K	732	92	65	89	103	16627	1103	4323	1927	1425
3000K	774	96	79	94	101	17551	11640	4563	2034	1504
3500K	801	95	81	94	102	18198	12069	4731	2109	1599
4000K	834	94	74	92	99	19634	13021	5105	2275	1683

*HO multiplier = 1.2x

BEAM

Name	LS11	LS14	LS23	LS36	LS44
Width (Diameter)	11°	14°	23°	36°	44°
Field Angle	20°	25°	38°	59°	69°

Ordering Code

MODEL - TYPE - SHAPE - OUTPUT - CCT - OPTIC - FINISH

HER06 - Hero Adjustable 6 LED
HER10 - Hero Adjustable 10 LED

TM - Track Mount

RD - Rounded Endcaps
SQ - Squared Endcaps

SO - Standard Output
HO - High Output[1]

27K - 2700K
30K - 3000K
35K - 3500K
40K - 4000K

LS11 - 11 Degree LightShift
LS14 - 14 Degree LightShift
LS23 - 23 Degree LightShift
LS36 - 36 Degree LightShift
LS44 - 44 Degree LightShift

WH - White
BK - Black

TRACK ADAPTER - STEM LENGTH - DRIVER


12D - 2 Circuit 120V with Data - 9219-2S - AAG Stucchi Track Only
12N - 2 Circuit 120V no Data - 9219-2 - AAG Stucchi & Nordic TEK Track[2]
27D - 2 Circuit 277V with Data - 9219-2S-277 - AAG Stucchi Track Only
27N - 2 Circuit 277V no Data - 9219-2-277 - AAG Stucchi & Nordic HTEK Track[2]

TS4 - Track Stem, 4" Overall Height
TS8 - Tracl Stem, 8" Overall Height

PHSD - Forward/Reverse Phase, 1% Dim, 120V
010S - 0-10V, 1% Dim, 120V/277V
010L - eldoLED, 0-10V, Linear, 0.1% Dim
010G - eldoLED, 0-10V, Log, 0.1% Dim
DALI - eldoLED, Dali Protocol 2, DT-6, 0.1% Dim


1. HO 1.2x multipler
2. 12N and 27N adapter compatible with PHSD driver only.

Product Dimensions

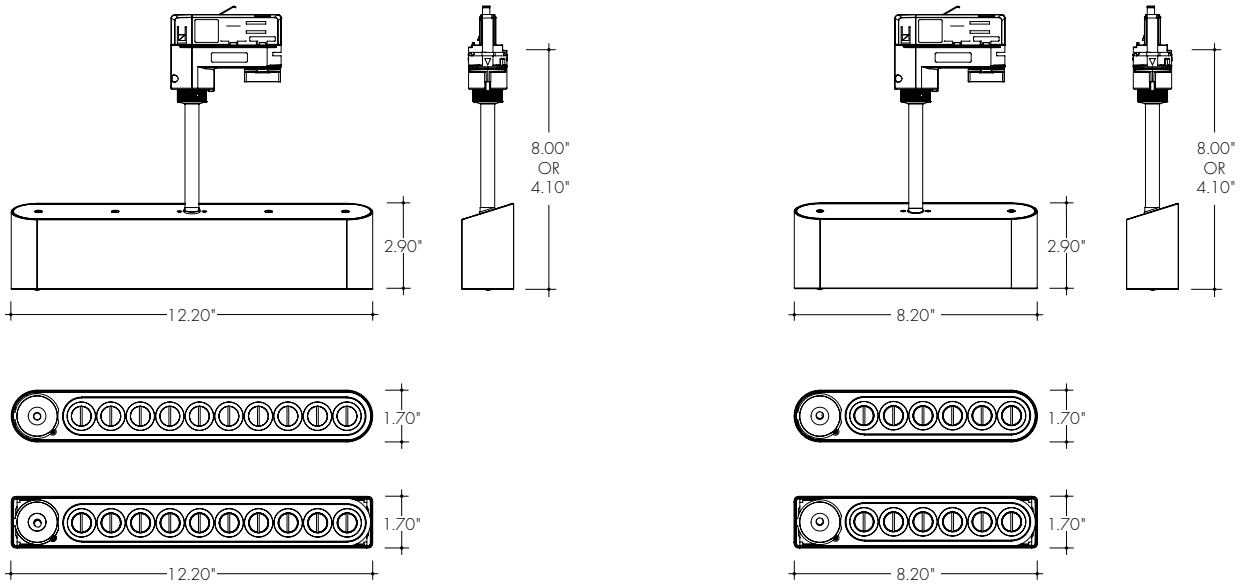


Shape

RD
Rounded Endcaps



SQ
Squared Endcaps




Finish

BK
Black



WH
White




Photometry

A-Downlight





B-30 Degree Beam Adjustment




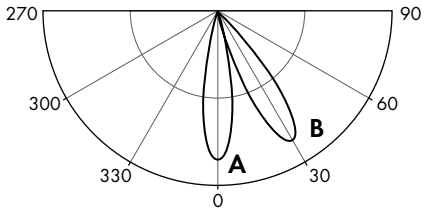



*Beam steering achived with intuitive joystick movement.


























Family

