Hero Wall Mount
LightShift Adjustable Luminaire

glint by luminii

Hero adjustable luminaire with LightShift technology provides for beam adjustment with a joystick-actuated internal mechanism that does not move or reorient the luminaire body. Harmonious integration into the architecture and flexible installation into the tightest spaces. Fixed light emitting face orientation, precision optics, adaptive glare baffle, and advanced anti-reflective materials provide for exceedingly low glare. Available with a wide range of beam characteristics, shapes, colors, and mounting configurations.

Mounting	lighting junction box canopy
Size	10 LED, 6 LED
Shape	rounded or rectangular
Stem	standard 4" offset
Operating Power	120-277 V, 50-60 Hz, power factor > 0.9
Dimming	Phase 1%, 0-10V 1%/0.1%, or DALI 0.1%
Beam Angle	11°, 14°, 23°, 36°, 44°
Location	Dry and Damp
Lifetime	60,000 hours
Warranty	5 years



Technical Information

MODEL:		Hero
Light Output (3000K) *HO uses 1.2 multiplier	SO	1290 lm (10 LED), 775 lm (6 LED)
	HO	1548 lm (10 LED), 930 lm (6 LED)
Efficacy		58 lm/W
Color Temperature		2700K, 3000K, 3500K, 4000K
CRI		92
Wattage	SO	23W (10 LED), 14W (6 LED)
	HO	28W (10 LED), 17W (6 LED)
Beam Tilt		Rated to ±40 deg
Beam Pan		Infinite (360 Deg with no stops)

10 LED

CCT	Lumens	CRI		TM-30		CBCP				
		R_a	R_9	R_f	R_g	LS11	LS14	LS23	LS36	LS44
2700K	1220	92	65	89	103	27712	18379	7206	3212	2375
3000K	1290	96	79	94	101	29252	19400	7606	3390	2507
3500K	1335	95	81	94	102	30330	20115	7886	3515	2599
4000K	1390	94	74	92	99	32724	21703	8509	3792	2805

6 LED

CCT	Lumens	CRI		TM-30		CBCP				
		R_a	R_9	R_f	R_g	LS11	LS14	LS23	LS36	LS44
2700K	732	92	65	89	103	16627	1103	4323	1927	1425
3000K	774	96	79	94	101	17551	11640	4563	2034	1504
3500K	801	95	81	94	102	18198	12069	4731	2109	1599
4000K	834	94	74	92	99	19634	13021	5105	2275	1683

*HO multiplier = 1.2x

BEAM

Name	LS11	LS14	LS23	LS36	LS44
Width (Diameter)	11°	14°	23°	36°	44°
Field Angle	20°	25°	38°	59°	69°

Ordering Code

MODEL - TYPE - SHAPE - OUTPUT - CCT - OPTIC - FINISH

MODEL	TYPE	SHAPE	OUTPUT	CCT	OPTIC	FINISH
HER06 - Hero Adjustable 6 LED HER10 - Hero Adjustable 10 LED	WM - Wall Mount	RD - Rounded Endcaps SQ - Squared Endcaps	SO - Standard Output HO - High Output[1]	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K	LS11 - 11 Degree LightShift LS14 - 14 Degree LightShift LS23 - 23 Degree LightShift LS36 - 36 Degree LightShift LS44 - 44 Degree LightShift	WH - White BK - Black

CANOPY SHAPE - STEM LENGTH - DRIVER

CANOPY SHAPE	STEM LENGTH	DRIVER
RD4 - 4" Round Canopy	WSS - Wall Stem Standard (4") WS2 - Wall Stem, 2' with tie-back	PHSD - Forward/Reverse Phase, 1% Dim, 120V 010S - 0-10V, 1% Dim, 120V/277V 010L - eldoLED, 0-10V, Linear, 0.1% Dim 010G - eldoLED, 0-10V, Log, 0.1% Dim DALI - eldoLED, Dali Protocol 2, DT-6, 0.1% Dim

1. HO 1.2x multipler

Product Dimensions

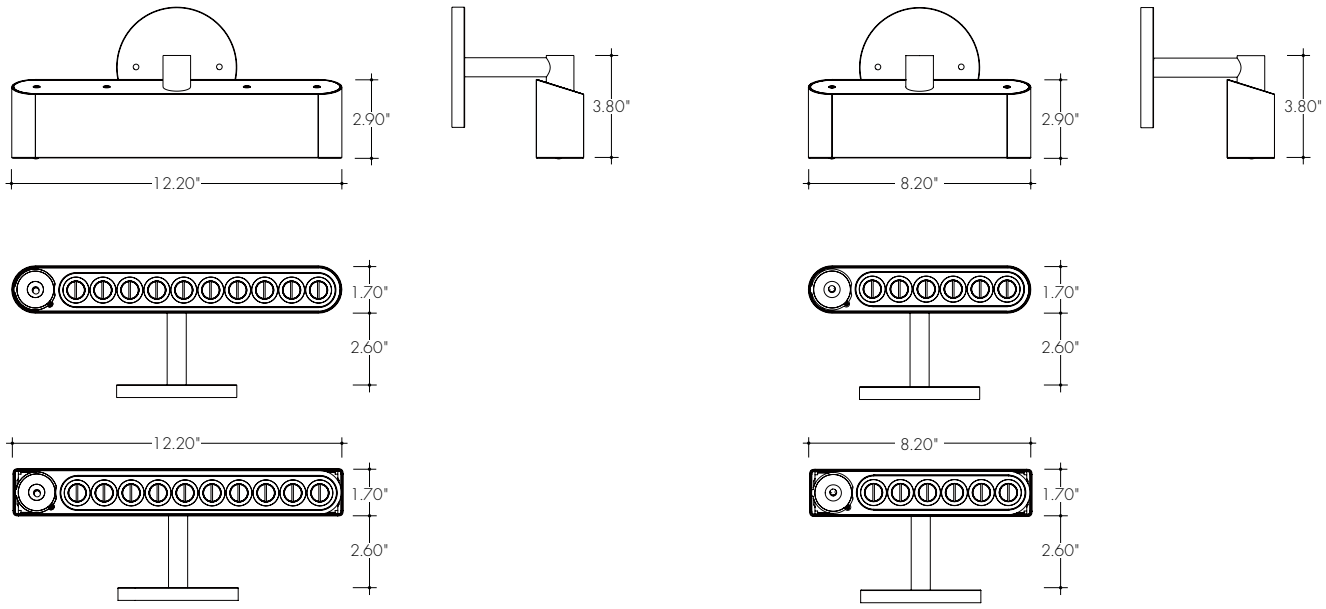

Shape

RD
Rounded Endcaps



SQ
Squared Endcaps



Finish

BK
Black

WH
White



Photometry

A-Downlight

B-30 Degree Beam Adjustment

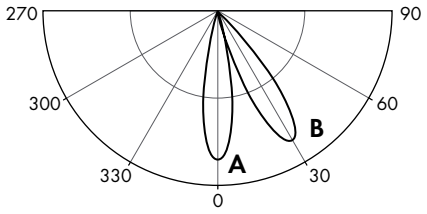

*Beam steering achived with intuitive joystick movement.




















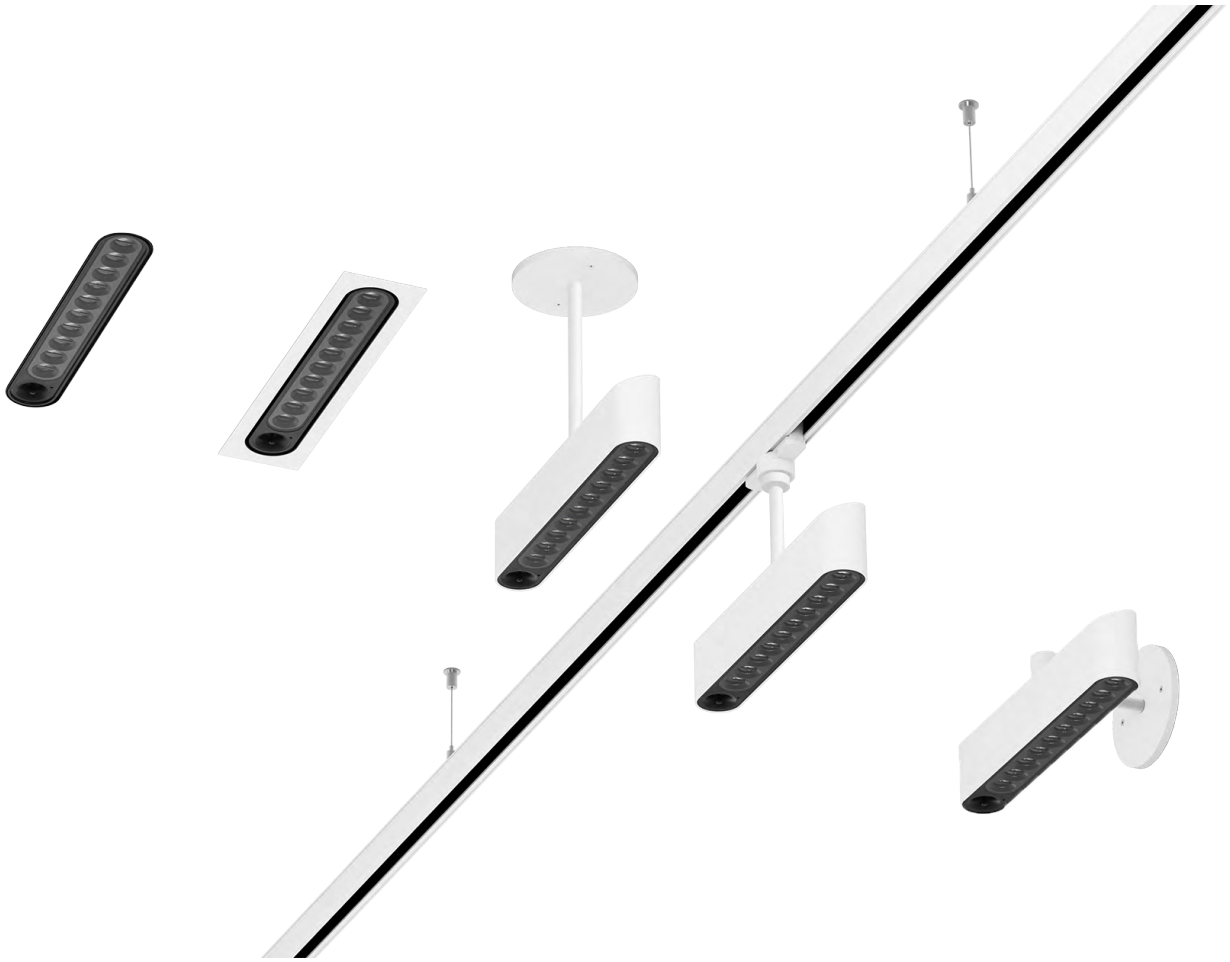
Family