Features

- 24VDC Class 2 fixtures made to order up to 144". Fixtures can be linked up to 90' depending on output
- Suitable for undercabinet, millwork, closet/ storage space, cove, curtain pocket, toe kick, architectural reveals, banister/ handrail, accent lighting, and surface mount applications
- Class 2 listed for damp locations
- Approved for closet/storage space installation per NEC 410.16(A) (3) and 410.16(C)(5) on outputs 5.7 W/ft or less
- Dot free even illumination with frosted lens
- Proprietary strong bond solder method handles up to 50 lbs of pull force on wire leads and connectors
- Vibrant Color options offer premium color quality with R9 values up to 98
- High Efficacy options offer best in class output and efficacy with over 740 lm/ft and up to 105 lm/W
- Average Life (L70): 50,000hrs
- 7 Year warranty



Finish Options (see page 3 for additional information)

Base	Silver Anodized				
Powder Coat	Black	Bronze	White		
Premium	Matte Black	Warm Nickel	Aged Brass	Polished Gold	Chrome

Technical Information

TYPE	Vibrant Color VC72					
OUTPUT OPTIONS	**VC72VLO**	**VC72LO**	**VC72SO**	**VC72MO**	**VC72HO**	**VC72VHO**
Lumens Output (3000K) (with a Round Frosted Lens)	84 lm/ft	213 lm/ft	284 lm/ft	375 lm/ft	453 lm/ft	603 lm/ft
Average Power Consumption (for a 4' section)	1.1 W/ft	2.8 W/ft	3.7 W/ft	4.9 W/ft	5.9 W/ft	7.9 W/ft
Efficacy	76 lm/W	76 lm/W	77 lm/W	77 lm/W	77 lm/W	76 lm/W
Max Run Length (in series)	56.9 ft	32 ft	28 ft	24 ft	21 ft	18 ft
Ambient Operating Temperature Range*	-4°F – 122°F (-20°C – 50°C)					-4°F – 86°F (-20°C – 30°C)

*Ambient Operating Temperature Range to maintain L70 of 50k+ hours in normal mounting conditions for the fixture. Exceeding Ambient Operating Temperature Range may result in decreased life/output. Consult Technical Support for specific inquiries.

TYPE	High Efficacy HE64					
OUTPUT OPTIONS	**HE64VLO**	**HE64LO**	**HE64SO**	**HE64MO**	**HE64HO**	**HE64VHO**
Lumens Output (3000K) (with a Round Frosted Lens)	93 lm/ft	200 lm/ft	287 lm/ft	381 lm/ft	542 lm/ft	742 lm/ft
Average Power Consumption (for a 4' section)	1 W/ ft	1.9 W/ ft	2.9 W/ ft	3.8 W/ ft	5.6 W/ ft	7.1 W/ ft
Efficacy	93 lm/W	105 lm/W	99 lm/W	100 lm/W	97 lm/W	105 lm/W
Max Run Length (in series)	90 ft	55 ft	34.9 ft	26 ft	17 ft	13 ft
Ambient Operating Temperature Range*	-4°F – 122°F (-20°C – 50°C)					-4°F – 104°F (-20°C – 40°C)

*Ambient Operating Temperature Range to maintain L70 of 50k+ hours in normal mounting conditions for the fixture. Exceeding Ambient Operating Temperature Range may result in decreased life/output. Consult Technical Support for specific inquiries.

Vibrant Color (VC72)

CCT	Multiplier (ref. - 30K)	TM-30 CRI	R_f	R_g	R_9
1800K	0.50	95	94	99	86
2200K	0.66	96	94	101	95
2400K	0.90	98	96	101	91
2700K	0.93	98	96	102	93
3000K	1.00	97	94	104	99
3500K	1.04	96	94	105	97
4100K	1.05	97	95	104	96

High Efficacy (HE64)

CCT	Multiplier (ref. - 30K)	TM-30 CRI	R_f	R_g	R_9
2200K	0.74	94	91	96	65
2400K	0.87	94	92	97	56
2700K	0.97	94	92	100	57
3000K	1.00	93	91	99	54
3500K	1.01	95	91	99	62
4000K	1.04	95	91	99	68

Ordering Code

MODEL - LENGTH[1] - OUTPUT[2] - CCT - LENS - MOUNTING - FINISH[3] - FEED POSITION LEFT - FEED POSITION RIGHT - SENSOR LOCATION - SENSORS[5]

MODEL
- K45M - Kendo 45M with Sensor

LENGTH[1]
- 12"–144" 1" increments
- 12"–144" 2" increments

OUTPUT[2]
- VC72VLO - Very Low
- VC72LO - Low
- VC72SO - Standard
- VC72MO - Medium
- VC72HO - High
- VC72VHO - Very High
- HE64VLO - Very Low
- HE64LO - Low
- HE64SO - Standard
- HE64MO - Medium
- HE64HO - High
- HE64VHO - Very High

CCT
- 18K - 1800K
- 22K - 2200K
- 24K - 2400K
- 27K - 2700K
- 30K - 3000K
- 35K - 3500K
- 41K - 4100K
- 40K - 4000K

LENS
- RF - Round Frosted

MOUNTING
- CB - Concealed Bracket

FINISH[3]

BASE
- SA - Silver Anodized

POWDER COAT
- BK - Black
- BZ - Bronze
- WH - White

PREMIUM
- MBK - Matte Black
- WN - Warm Nickel
- AB - Aged Brass
- PG - Polished Gold[4]
- CH - Chrome[4]

FEED POSITION LEFT

WIRE LEADS (72")
- LWE - Wire End Feed
- LWB - Wire Back Feed
- LNPF - No Power Feed

QUICK CONNECTS (4")
- LFE - Female Q/C, End Feed
- LFB - Female Q/C, Back Feed
- LNPF - No Power Feed

FEED POSITION RIGHT

WIRE LEADS (72")
- RNPF - No Power Feed
- RWE - Wire End Feed
- RWB - Wire Back Feed

QUICK CONNECTS (4")
- RNPF - No Power Feed
- RFE - Female Q/C, End Feed
- RFB - Female Q/C, Back Feed

SENSOR LOCATION
- L - Left
- R - Right

SENSORS[5]
- MN010 - PIR Integral Motion Sensor; 10 seconds delay
- MN020 - PIR Integral Motion Sensor; 20 seconds delay
- MN030 - PIR Integral Motion Sensor; 30 seconds delay
- MN045 - PIR Integral Motion Sensor; 45 seconds delay
- MN090 - PIR Integral Motion Sensor; 90 seconds delay
- MN0120 - PIR Integral Motion Sensor; 120 seconds delay
- IR1 - Near IR Remote Door Sensor; 1 Sensor
- IR3 - Near IR Remote Door Sensor; 2 or 3 Sensor

1 - Custom lengths and increments are available, please consult Inside Sales with specific request.
2 - Title 24 JA8 achievable depending on Output, CCT, and Lens selections. See multiplier charts to calculate specific efficacies.
3 - Non Base finishes may have extended lead times. Custom RALs are available, please consult Inside Sales with specific request.
4 - Polished Gold finishes and Chrome finishes have a maximum fixture length of 96".
5 - IR1, IR3 only available with Quick Connect Feed options.

Powerfeeds and Connectors

Power Feed Position Options and Orientation

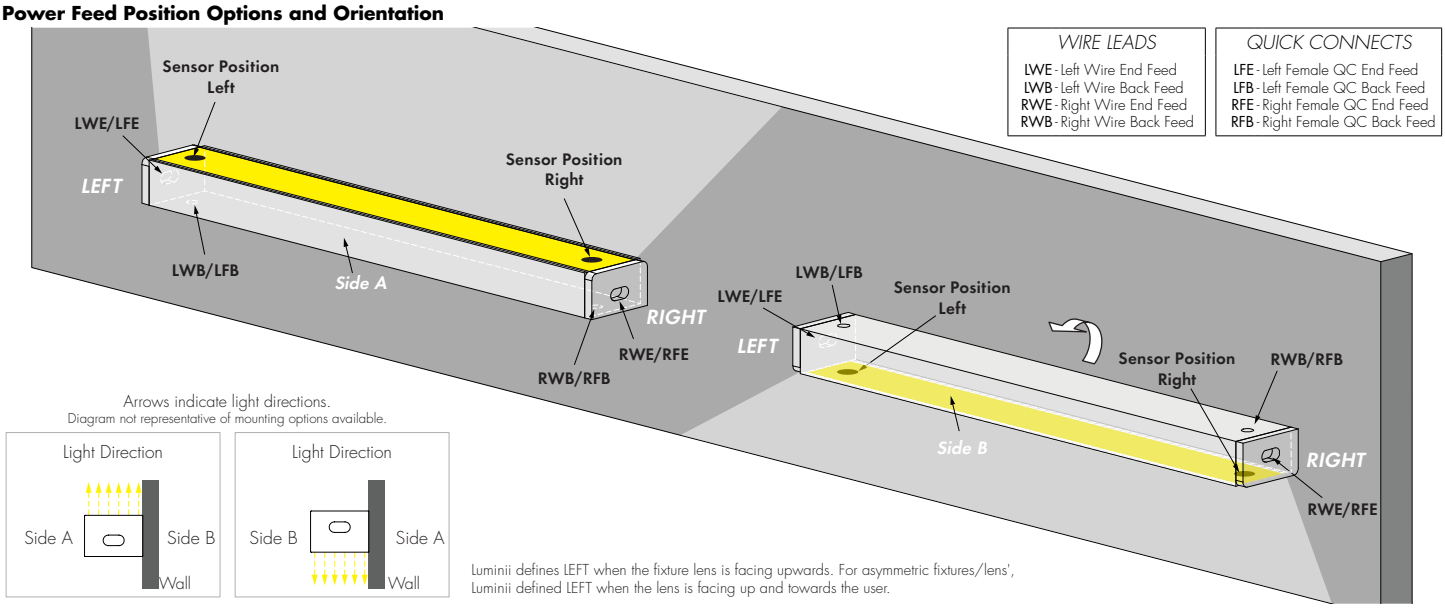

Arrows indicate light directions.
Diagram not representative of mounting options available.

Luminii defines LEFT when the fixture lens is facing upwards. For asymmetric fixtures/lens', Luminii defined LEFT when the lens is facing up and towards the user.

Linking and Extension Cable Options



LMC-12
Male quick-connect, 2 pin, 12"



LMC-70
Male quick-connect long, 2 pin, 70"





EC-12
Female to Female Extension Cable, 2 pin, 12"



EC-48
Female to Female Extension Cable, 2 pin, 48"



EC-120
Female to Female Extension Cable, 2 pin, 120"





LYC
1 Female to 2 Male Splitter Cable, 2 pin, 12"



FMA
Female to male adapter



IS-DC
Male to Female Inline DC Switch, 2 pin, 12"





Sample Layout





End feed shown



Back feed shown

Product Dimensions

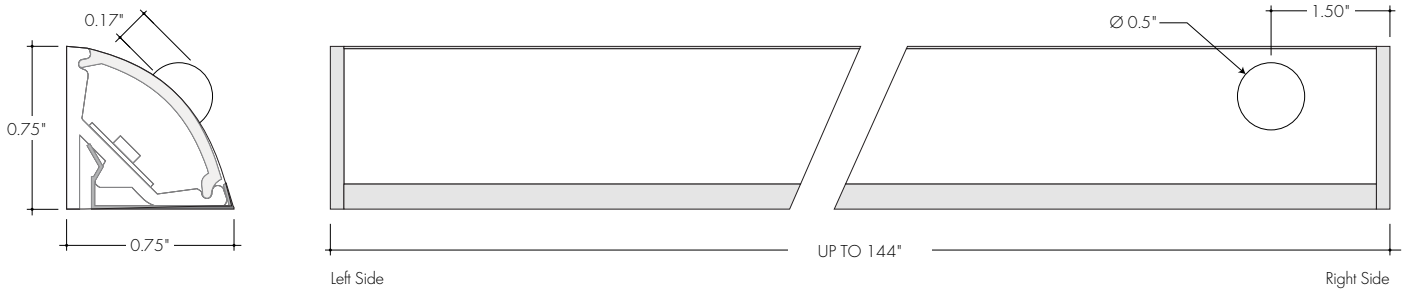

Finish Options

- Finish options are available in a wide variety, allowing for complete customization of style and aesthetic.
- Non Base finishes may have extended lead times and price adder.
- Polished Gold and Chrome finishes have a maximum fixture length of 96".
- Custom RALs are available, please consult Inside Sales with specific request.

Silver Anodized
Base

Silver Anodized is a soft silver with a clear finish.

Black
Powder Coat

Black is a true deep black with a glossy finish.

Bronze
Powder Coat



Bronze is a rich, dark brown with a satin finish.

White
Powder Coat

White is a polar bright white and field paintable.

Matte Black
Premium



Matte Black is a dark, pitch-black with a soft flat finish.

Warm Nickel
Premium

Warm Nickel is a soft, silvery smoke with warm tones and a satin finish.

Aged Brass
Premium



Aged Brass is a deep brown shade with slightly golden undertones.

Polished Gold
Premium



Polished Gold is bright and radiant for a brilliant finish.

Chrome
Premium

Chrome is a highly reflective silver polish.

Dimensions (Near IR Remote Sensor)

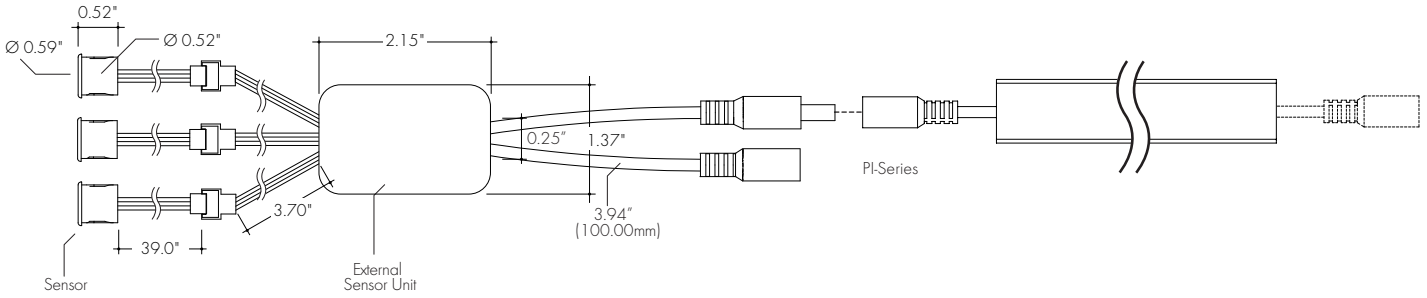

Functionality (External Door Sensor)

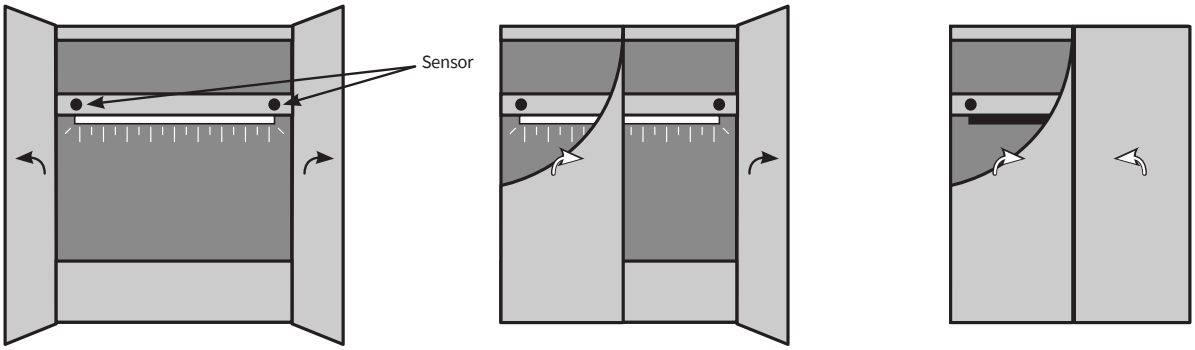

Wiring Diagrams (Near IR Remote Door Sensor)







Light Transmission and Dotting

	Lens/Accessory			
Output Options	**Round Frosted Lens**			
Dimming Level	100%	50%	10%	1%
VC72VLO	ND	ND	ND	ND
VC72LO	ND	ND	ND	ND
VC72SO	ND	ND	ND	ND
VC72MO	ND	ND	ND	ND
VC72HO	ND	ND	ND	ND
VC72VHO	ND	ND	ND	ND
HE64VLO	ND	ND	ND	ND
HE64LO	ND	ND	ND	ND
HE64SO	ND	ND	ND	ND
HE64MO	ND	ND	ND	ND
HE64HO	ND	ND	ND	ND
HE64VHO	ND	ND	ND	ND
Transmission Percentage	100%			



CD - Clear Dotting

SD - Slight Dotting

ND - No Dotting

Use complete Dotting Chart Tool online for more dotting information

I'm also click-able

Photometry

K45MRS-48-VC72VHO-30K-RF
Kendo 45MR with Sensor, 4ft, VHO, 3000K, Round Frosted Lens

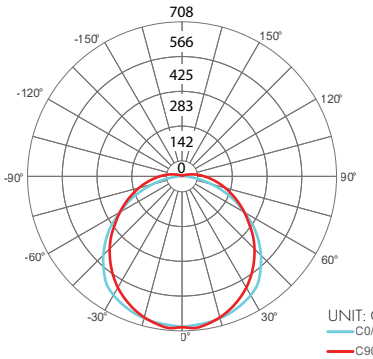

Zonal Lumen Summary 3000K

	Zone	Lumen	% Fixture
	0-30	138	23%
	0-40	230	38%
	0-60	420	70%
	0-90	576	95%
Total	0-180	603	100%



Power Consumption

Please visit the link/QR code below to access the Luminii Power Consumption Chart tool on our website.

There you will be able to select your fixture, ouput, and desired power feed to get a full power consumption table.

I'm also click-able

Desired Nominal Length: _____

Desired Output: _____

Desired CCT: _____

Voltage Drop Calculator

The below chart assumes nominal voltage of 24 Volts and a Voltage Drop Allowance of 3% through the wire

Wattage [W]	Maximum Wire Length From Power Supply to Start of Run [ft]						
	12 AWG	14 AWG	16 AWG	18 AWG	20 AWG	22 AWG	24 AWG
5	1088.2	684.4	430.3	270.6	170.2	107.1	67.3
10	544.1	342.2	215.1	135.3	85.1	53.5	33.7
15	362.7	228.1	143.4	90.2	56.7	35.7	22.4
20	272.0	171.1	107.6	67.7	42.6	26.8	16.8
25	217.6	136.9	86.1	54.1	34.0	21.4	13.5
30	181.4	114.1	71.7	45.1	28.4	17.8	11.2
35	155.5	97.8	61.5	38.7	24.3	15.3	9.6
40	136.0	85.5	53.8	33.8	21.3	13.4	8.4
45	120.9	76.0	47.8	30.1	18.9	11.9	7.5
50	108.8	68.4	43.0	27.1	17.0	10.7	6.7
55	98.9	62.2	39.1	24.6	15.5	9.7	6.1
60	90.7	57.0	35.9	22.6	14.2	8.9	5.6
65	83.7	52.6	33.1	20.8	13.1	8.2	5.2
70	77.7	48.9	30.7	19.3	12.2	7.6	4.8
75	72.5	45.6	28.7	18.0	11.3	7.1	4.5
80	68.0	42.8	26.9	16.9	10.6	6.7	4.2
85	64.0	40.3	25.3	15.9	10.0	6.3	4.0
90	60.5	38.0	23.9	15.0	9.5	5.9	3.7
96	56.7	35.6	22.4	14.1	8.9	5.6	3.5

Power Supplies

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

Ordering Code Non-Dimming Power Supply 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS - Power Supply, 120-277VAC	ND - Non Dimming	D - Dry	96 - 96 Watts	24 - 24 VDC

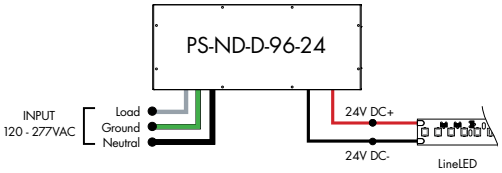

MODELS	96W
Length	14.40"
Width	5.20"
Depth	2.60"

Plug In Power Supply

MODEL	POWER	OUTPUT
PI - Plug In Series	130 - 30 Watt 160 - 60 Watt 196 - 96 Watt	24 - 24 VDC



MODELS	130	160	196
Length	3.75"	4.50"	6.00"
Width	1.83"	2.00"	2.35"
Depth	1.25"	1.24"	1.48"