



## Features

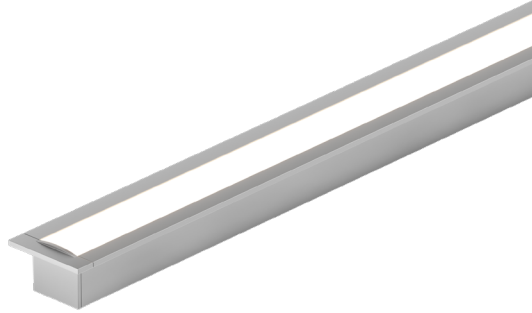

- 24VDC Class 2 fixtures made to order up to 144". Fixtures can be linked up to 90' depending on output
- Suitable for millwork, architectural reveals, accent lighting and recessed applications
- Approved for closet/storage space installation per NEC 410.16(A) (3) and 410.16(C)(5) on outputs 5.7W/ft or less
- Class 2 listed for damp locations
- Dot free even illumination with frosted lens

- Proprietary strong bond solder method handles up to 50 lbs of pull force on wire leads and connectors
- Vibrant Color options offer premium color quality with R9 values up to 98
- High Efficacy options offer best in class output and efficacy with over 930 lm/ft and up to 132 lm/W
- Average Life (L70): 50,000hrs
- 7 year warranty



## Finish Options (see page 3 for additional information)

|             |                                                                                                                                                                                      |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Base        | <input type="checkbox"/> Silver Anodized                                                                                                                                             |
| Powder Coat | <input type="checkbox"/> Black <input type="checkbox"/> Bronze <input type="checkbox"/> White                                                                                        |
| Premium     | <input type="checkbox"/> Matte Black <input type="checkbox"/> Warm Nickel <input type="checkbox"/> Aged Brass <input type="checkbox"/> Polished Gold <input type="checkbox"/> Chrome |



## Technical Information

| TYPE                                         | Vibrant Color VC72          |           |                             |           |                             |           |
|----------------------------------------------|-----------------------------|-----------|-----------------------------|-----------|-----------------------------|-----------|
| OUTPUT OPTIONS                               | VC72VLO                     | VC72LO    | VC72SO                      | VC72MO    | VC72HO                      | VC72VHO   |
| Lumens Output (3000K) [with a Clear Lens]    | 105 lm/ft                   | 268 lm/ft | 357 lm/ft                   | 471 lm/ft | 570 lm/ft                   | 759 lm/ft |
| Average Power Consumption (for a 4' section) | 1.1 W/ft                    | 2.8 W/ft  | 3.7 W/ft                    | 4.9 W/ft  | 5.9 W/ft                    | 7.9 W/ft  |
| Efficacy                                     | 95 lm/W                     | 96 lm/W   | 96 lm/W                     | 96 lm/W   | 97 lm/W                     | 96 lm/W   |
| Max Run Length (in series)                   | 56.9 ft                     | 32 ft     | 28 ft                       | 24 ft     | 21 ft                       | 18 ft     |
| Ambient Operating Temperature Range*         | -4°F - 122°F (-20°C - 50°C) |           | -4°F - 113°F (-20°C - 45°C) |           | -4°F - 104°F (-20°C - 40°C) |           |

\*Ambient Operating Temperature Range to maintain L70 of 50k+ hours in normal mounting conditions for the fixture. Exceeding Ambient Operating Temperature Range may result in decreased life/output. Consult Technical Support for specific inquiries.

| TYPE                                         | High Efficacy HE64          |           |                             |           |                            |           |
|----------------------------------------------|-----------------------------|-----------|-----------------------------|-----------|----------------------------|-----------|
| OUTPUT OPTIONS                               | HE64VLO                     | HE64LO    | HE64SO                      | HE64MO    | HE64HO                     | HE64VHO   |
| Lumens Output (3000K) [with a Clear Lens]    | 116 lm/ft                   | 251 lm/ft | 360 lm/ft                   | 479 lm/ft | 681 lm/ft                  | 934 lm/ft |
| Average Power Consumption (for a 4' section) | 1 W/ft                      | 1.9 W/ft  | 2.9 W/ft                    | 3.8 W/ft  | 5.6 W/ft                   | 7.1 W/ft  |
| Efficacy                                     | 116 lm/W                    | 132 lm/W  | 124 lm/W                    | 126 lm/W  | 122 lm/W                   | 132 lm/W  |
| Max Run Length (in series)                   | 90 ft                       | 54 ft     | 34.9 ft                     | 26 ft     | 17 ft                      | 13 ft     |
| Ambient Operating Temperature Range*         | -4°F - 122°F (-20°C - 50°C) |           | -4°F - 104°F (-20°C - 40°C) |           | -4°F - 95°F (-20°C - 35°C) |           |

\*Ambient Operating Temperature Range to maintain L70 of 50k+ hours in normal mounting conditions for the fixture. Exceeding Ambient Operating Temperature Range may result in decreased life/output. Consult Technical Support for specific inquiries.

## Vibrant Color (VC72)

| CCT   | Multiplier (ref. - 30K) | CRI | TM-30          |                |                |
|-------|-------------------------|-----|----------------|----------------|----------------|
|       |                         |     | R <sub>f</sub> | R <sub>g</sub> | R <sub>9</sub> |
| 1800K | 0.50                    | 95  | 94             | 99             | 86             |
| 2200K | 0.66                    | 96  | 94             | 101            | 95             |
| 2400K | 0.90                    | 98  | 96             | 101            | 91             |
| 2700K | 0.93                    | 98  | 96             | 102            | 93             |
| 3000K | 1.00                    | 97  | 94             | 104            | 99             |
| 3500K | 1.04                    | 96  | 94             | 105            | 97             |
| 4100K | 1.05                    | 97  | 95             | 104            | 96             |

## High Efficacy (HE64)

| CCT   | Multiplier (ref. - 30K) | CRI | TM-30          |                |                |
|-------|-------------------------|-----|----------------|----------------|----------------|
|       |                         |     | R <sub>f</sub> | R <sub>g</sub> | R <sub>9</sub> |
| 2200K | 0.74                    | 94  | 91             | 96             | 65             |
| 2400K | 0.87                    | 94  | 92             | 97             | 56             |
| 2700K | 0.97                    | 94  | 92             | 100            | 57             |
| 3000K | 1.00                    | 93  | 91             | 99             | 54             |
| 3500K | 1.01                    | 95  | 91             | 99             | 62             |
| 4000K | 1.04                    | 95  | 91             | 99             | 68             |

## Ordering Code

| MODEL                  | LENGTH <sup>1</sup>       | OUTPUT <sup>2</sup>                                                                                                | CCT                                                                                                   | LENS                                                                                               | MOUNTING                                                                                      | FINISH <sup>3</sup>                                                                                                                                                                                                                  | FEED POSITION LEFT <sup>5</sup>                                            | FEED POSITION RIGHT <sup>5</sup>                                           |
|------------------------|---------------------------|--------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------|----------------------------------------------------------------------------|
| KRM - Kendo M Recessed | 12"-144"<br>1" increments | VC72VLO - Very Low<br>VC72LO - Low<br>VC72SO - Standard<br>VC72MO - Medium<br>VC72HO - High<br>VC72VHO - Very High | 18K - 1800K<br>22K - 2200K<br>24K - 2400K<br>27K - 2700K<br>30K - 3000K<br>35K - 3500K<br>41K - 4100K | C - Clear Lens<br>HF - Half Frosted<br>FF - Flat Frosted<br>F - Frosted<br>GR - Narrow Beam Grazer | HS - Hard Surface Mounting Bracket<br>GS - Gypsum Surface Mounting Bracket<br>NB - No Bracket | BASE<br>SA - Silver Anodized<br><br>POWDER COAT<br>BK - Black<br>BZ - Bronze<br>WH - White<br><br>PREMIUM<br>MBK - Matte Black<br>WN - Warm Nickel<br>AB - Aged Brass<br>PG - Polished Gold <sup>4</sup><br>CH - Chrome <sup>4</sup> | PLENUM WIRE LEADS [72"]<br>LPB - Wire Back Feed<br>LNPF - No Power Feed    | PLENUM WIRE LEADS [72"]<br>RPB - Wire Back Feed<br>RNPF - No Power Feed    |
|                        | 12"-144"<br>2" increments | HE64VLO - Very Low<br>HE64LO - Low<br>HE64SO - Standard<br>HE64MO - Medium<br>HE64HO - High<br>HE64VHO - Very High | 22K - 2200K<br>24K - 2400K<br>27K - 2700K<br>30K - 3000K<br>35K - 3500K<br>40K - 4000K                |                                                                                                    |                                                                                               |                                                                                                                                                                                                                                      | QUICK CONNECTS [4"]<br>LFB - Female Q/C, Back Feed<br>LNPF - No Power Feed | QUICK CONNECTS [4"]<br>RFB - Female Q/C, Back Feed<br>RNPF - No Power Feed |

1 - Custom lengths and increments are available, please consult Inside Sales with specific request.

2 - Title 24 JA8 achievable depending on Output, CCT, and Lens selections. See multiplier charts to calculate specific efficacies.


3 - Non Base finishes may have extended lead times. Custom RALs are available, please consult Inside Sales with specific request.

4 - Polished Gold finishes and Chrome finishes have a maximum fixture length of 96".





5 - LNPF - RNPF is not a valid configuration option

## Powerfeeds and Connectors


### Power Feed Position Options and Orientation

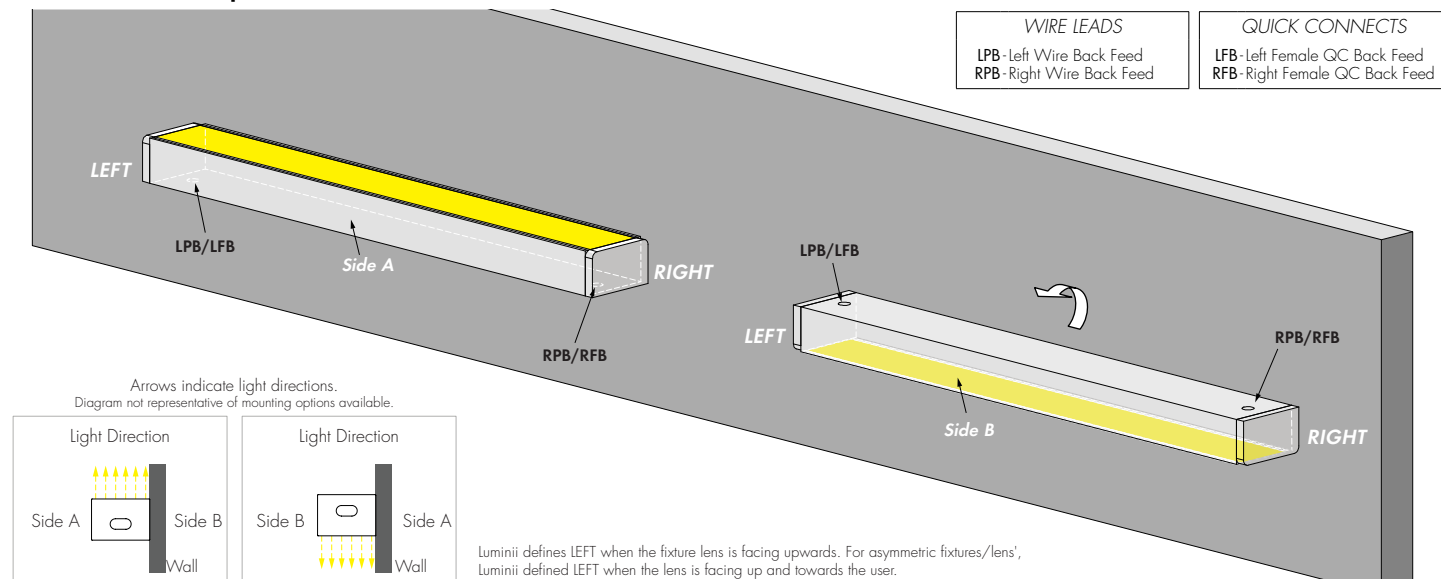


## Linking and Extension Cable Options




**LMC-12**  
Male quick-connect, 2 pin, 12"




**LMC-70**  
Male quick-connect long, 2 pin, 70"




**EC-12**  
Female to Female Extension Cable, 2 pin, 12"




**EC-48**  
Female to Female Extension Cable, 2 pin, 48"



**EC-120**  
Female to Female Extension Cable, 2 pin, 120"




**LYC**  
1 Female to 2 Male Splitter Cable, 2 pin, 12"




**FMA**  
Female to male adapter




**IS-DC**  
Male to Female Inline DC Switch, 2 pin, 12"



## Sample Layout

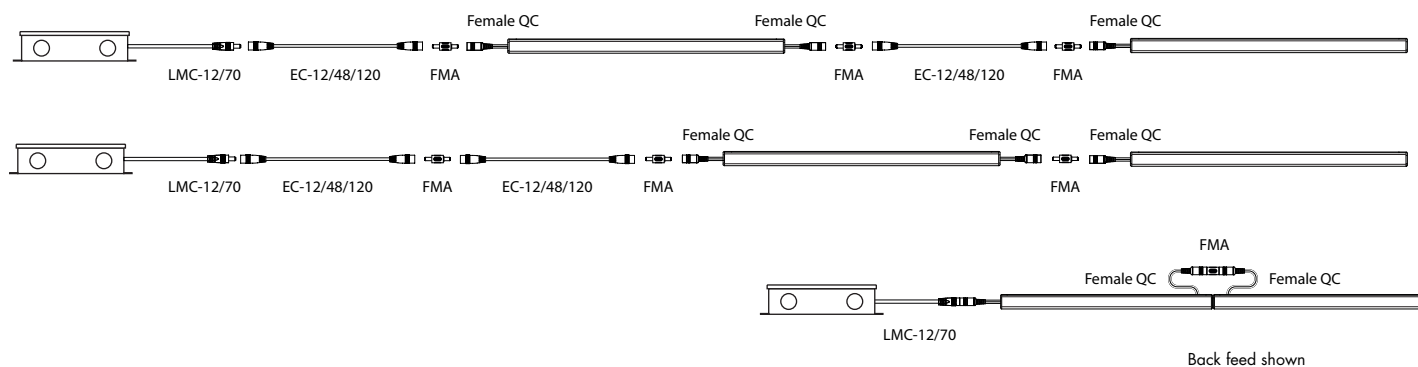

## Product Dimensions

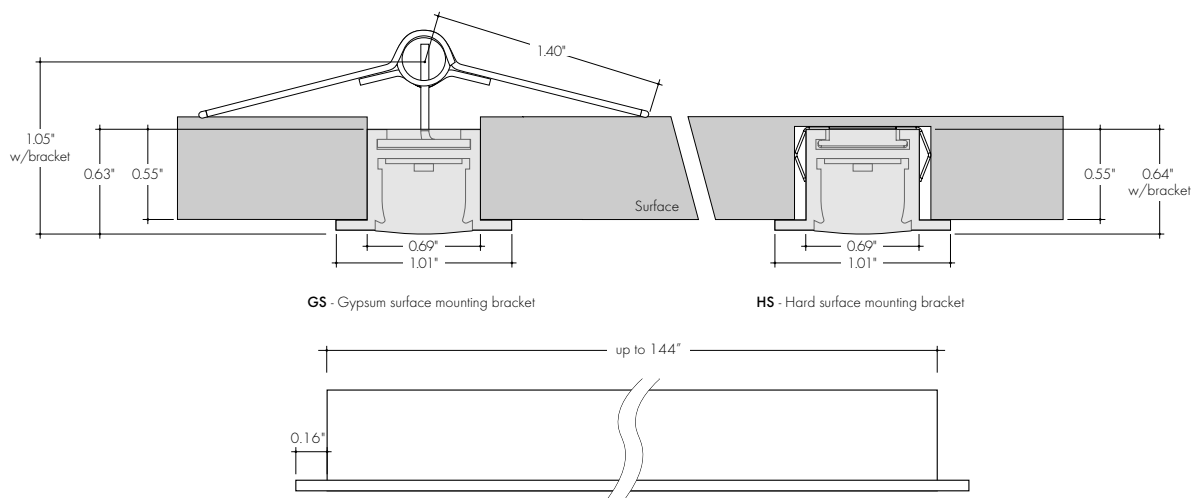

Note: Spring Bracket minimum ceiling thickness is 3/8", maximum ceiling thickness for drywall is 5/8".

## Finish Options


- Finish options are available in a wide variety, allowing for complete customization of style and aesthetic.
- Non Base finishes may have extended lead times and price adder.
- Polished Gold and Chrome finishes have a maximum fixture length of 96".
- Custom RALs are available, please consult Inside Sales with specific request.

**Silver Anodized Base**




Silver Anodized is a soft silver with a clear finish.

**Black Powder Coat**




Black is a true deep black with a glossy finish.

**Bronze Powder Coat**




Bronze is a rich, dark brown with a satin finish.

**White Powder Coat**



White is a polar bright white and field paintable.

**Matte Black Premium**




Matte Black is a dark, pitch-black with a soft flat finish.

**Warm Nickel Premium**




Warm Nickel is a soft, silvery smoke with warm tones and a satin finish.

**Aged Brass Premium**



Aged Brass is a deep brown shade with slightly golden undertones.

**Polished Gold Premium**



Polished Gold is bright and radiant for a brilliant finish.

**Chrome Premium**



Chrome is a highly reflective silver polish.


Light Transmission and Dotting

| Output Options          | Lens/Accessory |     |     |    |                   |     |     |    |              |     |     |    |                   |     |     |    |                    |     |     |    |
|-------------------------|----------------|-----|-----|----|-------------------|-----|-----|----|--------------|-----|-----|----|-------------------|-----|-----|----|--------------------|-----|-----|----|
|                         | Clear Lens     |     |     |    | Half Frosted Lens |     |     |    | Frosted Lens |     |     |    | Flat Frosted Lens |     |     |    | Narrow Beam Grazer |     |     |    |
| Dimming Level           | 100%           | 50% | 10% | 1% | 100%              | 50% | 10% | 1% | 100%         | 50% | 10% | 1% | 100%              | 50% | 10% | 1% | 100%               | 50% | 10% | 1% |
| VC72VLO                 | CD             | CD  | CD  | CD | ND                | ND  | SD  | CD | ND           | ND  | ND  | ND | ND                | ND  | ND  | ND | CD                 | CD  | CD  | CD |
| VC72LO                  | CD             | CD  | CD  | CD | ND                | ND  | SD  | CD | ND           | ND  | ND  | ND | ND                | ND  | ND  | ND | CD                 | CD  | CD  | CD |
| VC72SO                  | CD             | CD  | CD  | CD | ND                | ND  | SD  | CD | ND           | ND  | ND  | ND | ND                | ND  | ND  | ND | CD                 | CD  | CD  | CD |
| VC72MO                  | CD             | CD  | CD  | CD | ND                | ND  | SD  | CD | ND           | ND  | ND  | ND | ND                | ND  | ND  | ND | CD                 | CD  | CD  | CD |
| VC72HO                  | CD             | CD  | CD  | CD | ND                | ND  | SD  | CD | ND           | ND  | ND  | ND | ND                | ND  | ND  | ND | CD                 | CD  | CD  | CD |
| VC72VHO                 | CD             | CD  | CD  | CD | ND                | ND  | SD  | CD | ND           | ND  | ND  | ND | ND                | ND  | ND  | ND | CD                 | CD  | CD  | CD |
| HE64VLO                 | CD             | CD  | CD  | CD | ND                | ND  | SD  | CD | ND           | ND  | ND  | ND | ND                | ND  | ND  | ND | CD                 | CD  | CD  | CD |
| HE64LO                  | CD             | CD  | CD  | CD | ND                | ND  | SD  | CD | ND           | ND  | ND  | ND | ND                | ND  | ND  | ND | CD                 | CD  | CD  | CD |
| HE64SO                  | CD             | CD  | CD  | CD | ND                | ND  | SD  | CD | ND           | ND  | ND  | ND | ND                | ND  | ND  | ND | CD                 | CD  | CD  | CD |
| HE64MO                  | CD             | CD  | CD  | CD | ND                | ND  | SD  | CD | ND           | ND  | ND  | ND | ND                | ND  | ND  | ND | CD                 | CD  | CD  | CD |
| HE64HO                  | CD             | CD  | CD  | CD | ND                | ND  | SD  | CD | ND           | ND  | ND  | ND | ND                | ND  | ND  | ND | CD                 | CD  | CD  | CD |
| HE64VHO                 | CD             | CD  | CD  | CD | ND                | ND  | SD  | CD | ND           | ND  | ND  | ND | ND                | ND  | ND  | ND | CD                 | CD  | CD  | CD |
| Transmission Percentage | 100%           |     |     |    | 80%               |     |     |    | 62%          |     |     |    | 68%               |     |     |    | 69%                |     |     |    |

Use complete Dotting Chart Tool online for more dotting information



I'm also clickable




CD - Clear Dotting

SD - Slight Dotting


ND - No Dotting

Accessory Options

**LVSP-4T-BK**  
Low Voltage, 4 Terminal Splice Box, Black, IP20




**OS-DC-F4-BK**  
Occupancy Sensor





Male Quick Connect, FMA, LMC, LYC, or IS-DC are required for input and output.

**DIM-DC-F4-BK**  
24VDC Low Voltage In-line Dimmer Module



Male Quick Connect, FMA, LMC, LYC, or IS-DC are required for input and output.

**NLEX.D1.B & NLEX.D3.B**  
Near Infrared Remote Door Sensor

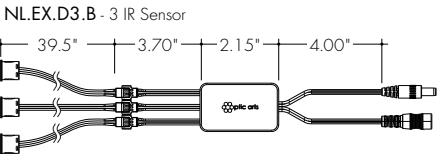


Male Quick Connect, FMA, LMC, LYC, or IS-DC are required for input and output. For more information visit Sensor Spec Sheet [Link](#)

## Photometry

KRM-48-VC72VHO-30K-F


Kendo RM, 4ft, VHO, 3000K, Frosted Lens

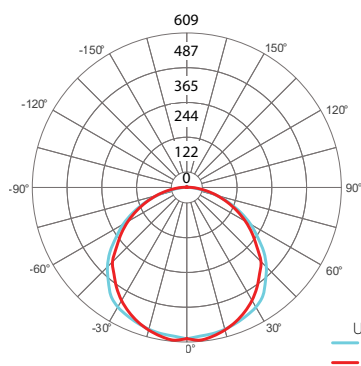**Zonal Lumen Summary 3000K**


| Zone  | Lumen | % Fixture |
|-------|-------|-----------|
| 0-30  | 119   | 25%       |
| 0-40  | 198   | 42%       |
| 0-60  | 359   | 76%       |
| 0-90  | 467   | 99%       |
| Total | 0-180 | 473 100%  |

KRM-48-VC72VHO-30K-GR


Kendo RM, 4ft, VHO, 3000K, Narrow Beam Grazer Lens

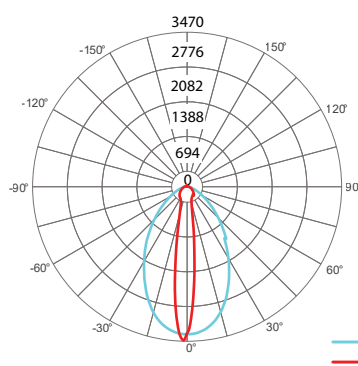**Zonal Lumen Summary 3000K**


| Zone  | Lumen | % Fixture |
|-------|-------|-----------|
| 0-30  | 243   | 46%       |
| 0-40  | 329   | 63%       |
| 0-60  | 458   | 88%       |
| 0-90  | 517   | 99%       |
| Total | 0-180 | 523 100%  |

KRM-48-VC72VHO-30K-HF


Kendo RM, 4ft, VHO, 3000K, Half Frosted Lens

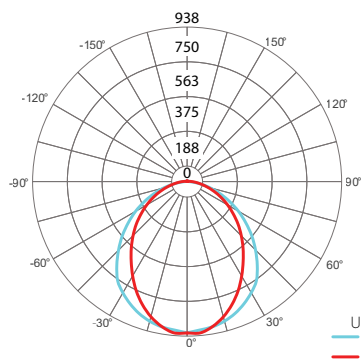**Zonal Lumen Summary 3000K**


| Zone  | Lumen | % Fixture |
|-------|-------|-----------|
| 0-30  | 174   | 29%       |
| 0-40  | 279   | 46%       |
| 0-60  | 475   | 79%       |
| 0-90  | 595   | 99%       |
| Total | 0-180 | 603 100%  |

KRM-48-VC72VHO-30K-C


Kendo RM, 4ft, VHO, 3000K, Clear Lens

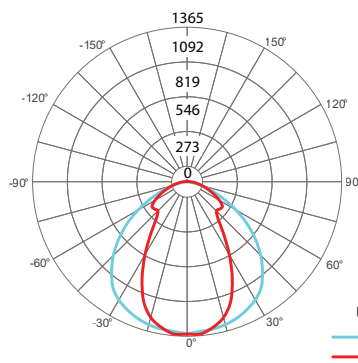**Zonal Lumen Summary 3000K**


| Zone  | Lumen | % Fixture |
|-------|-------|-----------|
| 0-30  | 253   | 33%       |
| 0-40  | 394   | 52%       |
| 0-60  | 619   | 82%       |
| 0-90  | 749   | 99%       |
| Total | 0-180 | 759 100%  |

KRM-48-VC72VHO-30K-FE

Kendo RM, 4ft, VHO, 3000K, Flat Frosted Lens

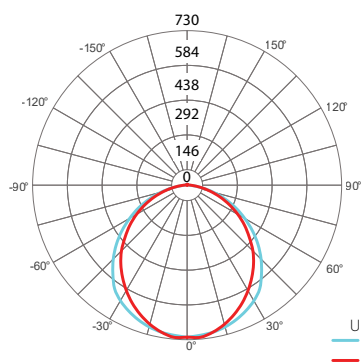**Zonal Lumen Summary 3000K**

| Zone  | Lumen | % Fixture |
|-------|-------|-----------|
| 0-30  | 139   | 27%       |
| 0-40  | 228   | 44%       |
| 0-60  | 404   | 78%       |
| 0-90  | 514   | 99%       |
| Total | 0-180 | 520 100%  |



Power Consumption

Please visit the link/QR code below to access the Luminii Power Consumption Chart tool on our website.

There you will be able to select your fixture, output, and desired power feed to get a full power consumption table.



I'm also click-able

Desired Nominal Length:

Desired Output:

Desired CCT:

Voltage Drop Calculator

The below chart assumes nominal voltage of 24 Volts and a Voltage Drop Allowance of 3% through the wire

| Wattage<br>[W] | Maximum Wire Length From Power Supply to Start of Run [ft] |        |        |        |        |        |        |
|----------------|------------------------------------------------------------|--------|--------|--------|--------|--------|--------|
|                | 12 AWG                                                     | 14 AWG | 16 AWG | 18 AWG | 20 AWG | 22 AWG | 24 AWG |
| 5              | 1088.2                                                     | 684.4  | 430.3  | 270.6  | 170.2  | 107.1  | 67.3   |
| 10             | 544.1                                                      | 342.2  | 215.1  | 135.3  | 85.1   | 53.5   | 33.7   |
| 15             | 362.7                                                      | 228.1  | 143.4  | 90.2   | 56.7   | 35.7   | 22.4   |
| 20             | 272.0                                                      | 171.1  | 107.6  | 67.7   | 42.6   | 26.8   | 16.8   |
| 25             | 217.6                                                      | 136.9  | 86.1   | 54.1   | 34.0   | 21.4   | 13.5   |
| 30             | 181.4                                                      | 114.1  | 71.7   | 45.1   | 28.4   | 17.8   | 11.2   |
| 35             | 155.5                                                      | 97.8   | 61.5   | 38.7   | 24.3   | 15.3   | 9.6    |
| 40             | 136.0                                                      | 85.5   | 53.8   | 33.8   | 21.3   | 13.4   | 8.4    |
| 45             | 120.9                                                      | 76.0   | 47.8   | 30.1   | 18.9   | 11.9   | 7.5    |
| 50             | 108.8                                                      | 68.4   | 43.0   | 27.1   | 17.0   | 10.7   | 6.7    |
| 55             | 98.9                                                       | 62.2   | 39.1   | 24.6   | 15.5   | 9.7    | 6.1    |
| 60             | 90.7                                                       | 57.0   | 35.9   | 22.6   | 14.2   | 8.9    | 5.6    |
| 65             | 83.7                                                       | 52.6   | 33.1   | 20.8   | 13.1   | 8.2    | 5.2    |
| 70             | 77.7                                                       | 48.9   | 30.7   | 19.3   | 12.2   | 7.6    | 4.8    |
| 75             | 72.5                                                       | 45.6   | 28.7   | 18.0   | 11.3   | 7.1    | 4.5    |
| 80             | 68.0                                                       | 42.8   | 26.9   | 16.9   | 10.6   | 6.7    | 4.2    |
| 85             | 64.0                                                       | 40.3   | 25.3   | 15.9   | 10.0   | 6.3    | 4.0    |
| 90             | 60.5                                                       | 38.0   | 23.9   | 15.0   | 9.5    | 5.9    | 3.7    |
| 96             | 56.7                                                       | 35.6   | 22.4   | 14.1   | 8.9    | 5.6    | 3.5    |

Power Supplies

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

For use with Static White


Ordering Code - Universal Dimming Power Supplies 0.1% 120VAC - 277VAC

| MODEL                         | INPUT CONTROL                                    | WATTAGE                                                              | OUTPUT      |
|-------------------------------|--------------------------------------------------|----------------------------------------------------------------------|-------------|
| PS - Power Supply, 120-277VAC | UNI - 0-10V Dimming (0.1%), Phase Dimming (0.1%) | 30 - 30 Watts<br>60 - 60 Watts<br>96 - 96 Watts<br>3x96 - 3x96 Watts | 24 - 24 VDC |

Compatibility: View a complete list of compatible dimmers on the PS-UNI product page.

0-10V - 0.1% dimming  
MLV/ELV/TRIAC - 0.1% dimming, consult dimming compatibility chart

| MODELS | PS-UNI-30W | PS-UNI-60W | PS-UNI-96W | PS-UNI-3X96W |
|--------|------------|------------|------------|--------------|
| Length | 6.50"      | 7.40"      | 8.66"      | 11.85"       |
| Width  | 3.73"      | 3.73"      | 3.73"      | 4.32"        |
| Depth  | 1.61"      | 1.61"      | 1.61"      | 1.81"        |

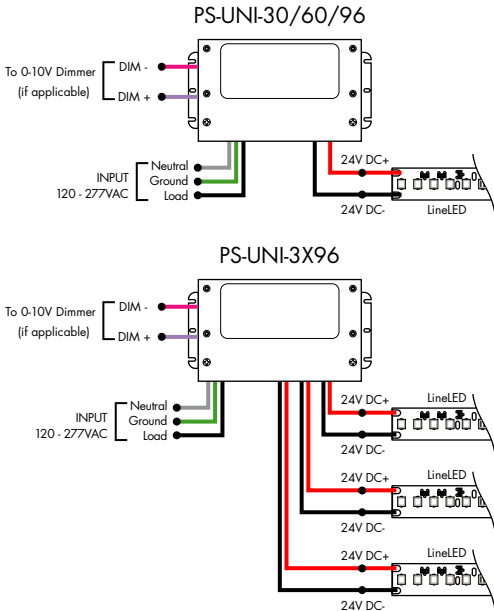


For use with Static White

Ordering Code - 0-10V Dimming Power Supplies 0.1% 120VAC - 277VAC

| MODEL                         | INPUT CONTROL                                                                           | ENVIRONMENT | WATTAGE                            | OUTPUT      |
|-------------------------------|-----------------------------------------------------------------------------------------|-------------|------------------------------------|-------------|
| PS - Power Supply, 120-277VAC | 010V-LIN - 0-10V Dimming (0.1%), Linear<br>010V-LOG - 0-10V Dimming (0.1%), Logarithmic | D - Dry     | 96 - 96 Watts<br>3x96 - 3x96 Watts | 24 - 24 VDC |

| MODELS | 96W    | 3X96   |
|--------|--------|--------|
| Length | 14.40" | 15.00" |
| Width  | 5.20"  | 6.62"  |
| Depth  | 2.60"  | 4.45"  |

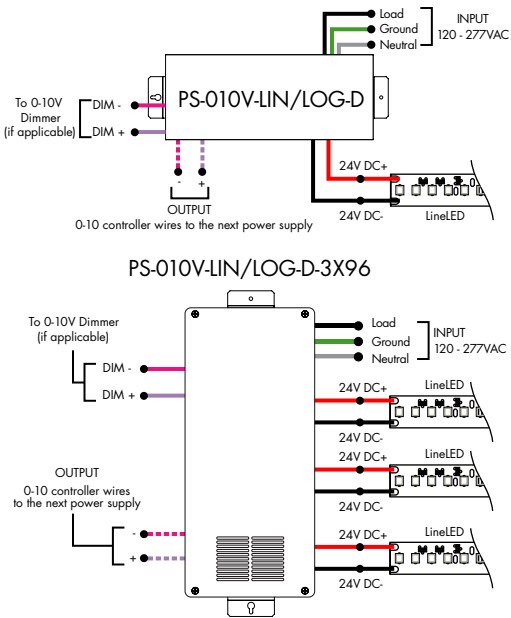


## Power Supplies

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

### For use with Static White

#### Ordering Code - Athena 0-10V LED Driver

| MODEL                         | INPUT CONTROL                                                                           | ENVIRONMENT | WATTAGE     | OUTPUT    | FEATURE      |
|-------------------------------|-----------------------------------------------------------------------------------------|-------------|-------------|-----------|--------------|
| PS - Power Supply, 120-277VAC | 010V-LIN - 0-10V Dimming (0.1%), Linear<br>010V-LOG - 0-10V Dimming (0.1%), Logarithmic | D-Dry       | 96-96 Watts | 24-24 VDC | AWN-R-Athena |

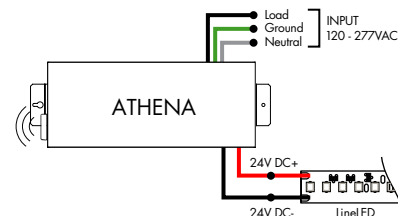


| MODELS | 96W    |
|--------|--------|
| Length | 14.40" |
| Width  | 5.20"  |
| Depth  | 2.60"  |

### For use with Static White

#### Ordering Code - DALI 2 Dimming Power Supplies 0.1% 120VAC - 277VAC

| MODEL                         | INPUT CONTROL                | ENVIRONMENT | WATTAGE     | OUTPUT    |
|-------------------------------|------------------------------|-------------|-------------|-----------|
| PS - Power Supply, 120-277VAC | DALI2-DT6 - DALI2 DT6 (0.1%) | D-Dry       | 96-96 Watts | 24-24 VDC |

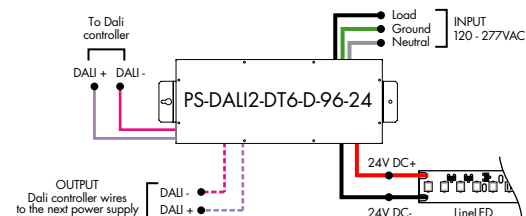


| Model  | 96W    |
|--------|--------|
| Length | 14.40" |
| Width  | 5.20"  |
| Depth  | 2.60"  |


### For use with Static White

#### Ordering Code - DALI Dimming Power Supplies 0.1% 120VAC - 277VAC

| MODEL                         | INPUT CONTROL      | ENVIRONMENT | WATTAGE                        | OUTPUT    |
|-------------------------------|--------------------|-------------|--------------------------------|-----------|
| PS - Power Supply, 120-277VAC | DALI - DALI (0.1%) | D-Dry       | 96-96 Watts<br>3x96-3x96 Watts | 24-24 VDC |

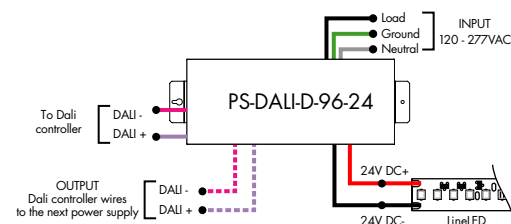

| Model  | 96W    | 3X96   |
|--------|--------|--------|
| Length | 14.40" | 15.00" |
| Width  | 5.20"  | 6.62"  |
| Depth  | 2.60"  | 4.56"  |

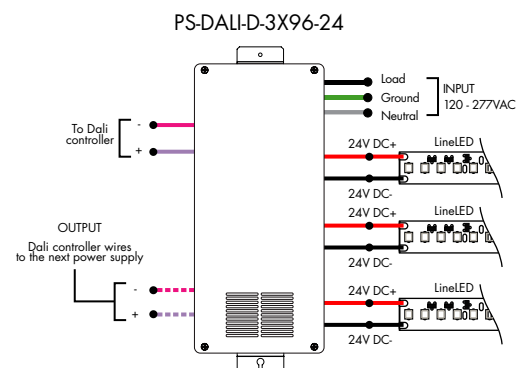

## Power Supplies

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.



### For use with Static White

#### Ordering Code - DMX Dimming Power Supplies 0.1% 120VAC - 277VAC

| MODEL                         | INPUT CONTROL    | ENVIRONMENT | WATTAGE                            | OUTPUT      |
|-------------------------------|------------------|-------------|------------------------------------|-------------|
| <div></div>                   | <div></div>      | <div></div> | <div></div>                        | <div></div> |
| PS - Power Supply, 120-277VAC | DMX - DMX (0.1%) | D - Dry     | 96 - 96 Watts<br>3x96 - 3x96 Watts | 24 - 24 VDC |

| MODELS | 96W    | 3X96   |
|--------|--------|--------|
| Length | 14.40" | 15.00" |
| Width  | 5.20"  | 6.62"  |
| Depth  | 2.60"  | 4.56"  |

ZONAL CONTROL POWER SUPPLIES.  
CONTROL MULTIPLE TAPES/ZONES USING DMX CHANNELS.

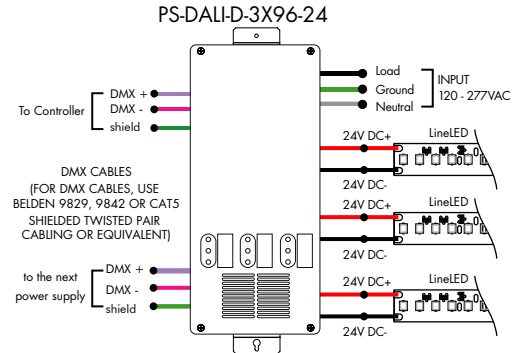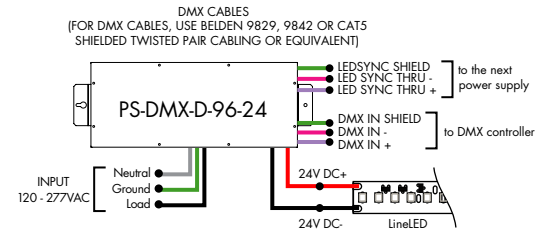


### For use with Static White

#### Ordering Code - Non-Dimming Power Supply, 120VAC - 277VAC

| MODEL                         | INPUT CONTROL    | ENVIRONMENT | WATTAGE       | OUTPUT      |
|-------------------------------|------------------|-------------|---------------|-------------|
| <div></div>                   | <div></div>      | <div></div> | <div></div>   | <div></div> |
| PS - Power Supply, 120-277VAC | ND - Non Dimming | D - Dry     | 96 - 96 Watts | 24 - 24 VDC |

| MODELS | 96W    |
|--------|--------|
| Length | 14.40" |
| Width  | 5.20"  |
| Depth  | 2.60"  |

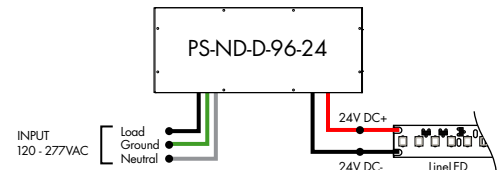


### For use with Static White

#### Ordering Code - In-Ground Power Supplies

| MODEL                                                                                        | INPUT CONTROL          | ENVIRONMENT    | WATTAGE           | OUTPUT      |
|----------------------------------------------------------------------------------------------|------------------------|----------------|-------------------|-------------|
| <div></div>                                                                                  | <div></div>            | <div></div>    | <div></div>       | <div></div> |
| PS120 - Power Supply, 120VAC<br>PS240 - Power Supply, 240VAC<br>PS277 - Power Supply, 277VAC | ELV - ELV Dimming (1%) | IG - In Ground | 2X96 - 2X96 Watts | 24 - 24 VDC |

| MODELS | 2X96W |
|--------|-------|
| Length | 8.40" |
| Width  | 8.30" |
| Depth  | 8.10" |

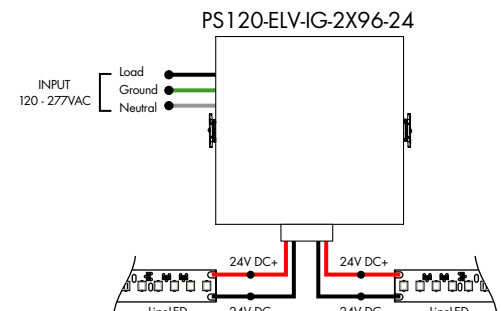

Power Supplies

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.



Luminii is a Lutron OEM Advantage Partner


Lutron Power Supplies 1%

MODEL

L3DA4U1UKL-CV240

HiLume™ 1% EcoSystem Voltage LED driver 40W max

| MODELS | L3DA4U1UKL-CV240 |
|--------|------------------|
| Length | 4.98"            |
| Width  | 4.00"            |
| Depth  | 2.62"            |

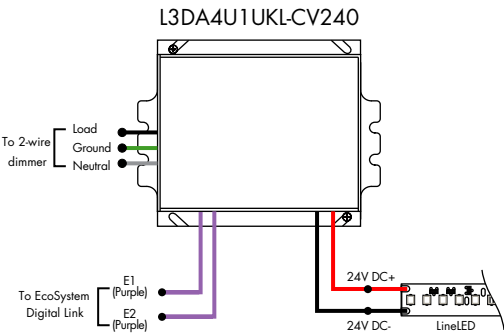

Luminii is a Lutron OEM Advantage Partner

Lutron Power Supplies 0.1%

MODEL

L3D0-96W24V-U

HiLume™ 0.1% EcoSystem Voltage LED Driver with Soft-On, Fade-to-Black™  
96W max

| MODELS | L3D0   |
|--------|--------|
| Length | 10.50" |
| Width  | 5.50"  |
| Depth  | 2.00"  |

