



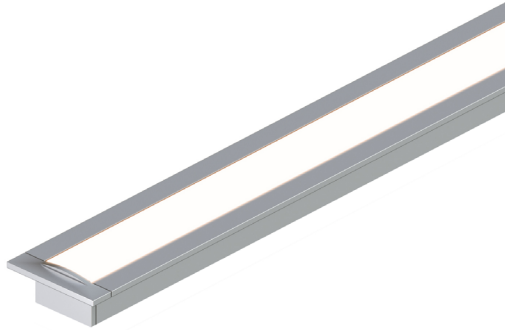

### Features

- 24VDC Class 2 fixtures made to order up to 144". Fixtures can be linked up to 90' depending on output
- Suitable for millwork, recessed, architectural reveals, and accent lighting applications
- Approved for closet/storage space installation per NEC 410.16(A) (3) and 410.16(C)(5) on outputs 5.7 W/ft or less
- Class 2 listed for damp locations
- Dot free even illumination with frosted lens
- Proprietary strong bond solder method handles up to 50 lbs of pull force on wire leads and connectors
- Vibrant Color options offer premium color quality with R9 values up to 98
- High Efficacy options offer best in class output and efficacy with over 1020 lm/ft and up to 146 lm/W
- Average Life (L70): 50,000hrs
- 7 year warranty



### Finish Options (see page 3 for additional information)

|             |                                                                                                                                                                                      |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Base        | <input type="checkbox"/> Silver Anodized                                                                                                                                             |
| Powder Coat | <input type="checkbox"/> Black <input type="checkbox"/> Bronze <input type="checkbox"/> White                                                                                        |
| Premium     | <input type="checkbox"/> Matte Black <input type="checkbox"/> Warm Nickel <input type="checkbox"/> Aged Brass <input type="checkbox"/> Polished Gold <input type="checkbox"/> Chrome |



## Technical Information

| TYPE                                            | Vibrant Color VC72             |                                |                                |                               |                               |                               |
|-------------------------------------------------|--------------------------------|--------------------------------|--------------------------------|-------------------------------|-------------------------------|-------------------------------|
| OUTPUT OPTIONS                                  | VC72VLO                        | VC72LO                         | VC72SO                         | VC72MO                        | VC72HO                        | VC72VHO                       |
| Lumens Output (3000K)<br>(with a Clear lens)    | 116 lm/ft                      | 295 lm/ft                      | 393 lm/ft                      | 519 lm/ft                     | 627 lm/ft                     | 835 lm/ft                     |
| Average Power Consumption<br>(for a 4' section) | 1.1 W/ft                       | 2.8 W/ft                       | 3.7 W/ft                       | 4.9 W/ft                      | 5.9 W/ft                      | 7.9 W/ft                      |
| Efficacy                                        | 105 lm/W                       | 105 lm/W                       | 106 lm/W                       | 106 lm/W                      | 106 lm/W                      | 106 lm/W                      |
| Max Run Length<br>(in series)                   | 56.9 ft                        | 32 ft                          | 28 ft                          | 24 ft                         | 21 ft                         | 18 ft                         |
| Ambient Operating Temperature Range*            | -4°F - 122°F<br>(-20°C - 50°C) | -4°F - 113°F<br>(-20°C - 45°C) | -4°F - 104°F<br>(-20°C - 40°C) | -4°F - 95°F<br>(-20°C - 35°C) | -4°F - 86°F<br>(-20°C - 30°C) | -4°F - 77°F<br>(-20°C - 25°C) |

\* Ambient Operating Temperature Range to maintain L70 of 50k+ hours in normal mounting conditions for the fixture. Exceeding Ambient Operating Temperature Range may result in decreased life/output. Consult Technical Support for specific inquiries.

| TYPE                                            | High Efficacy HE64             |                                |                                |                               |                               |            |
|-------------------------------------------------|--------------------------------|--------------------------------|--------------------------------|-------------------------------|-------------------------------|------------|
| OUTPUT OPTIONS                                  | HE64VLO                        | HE64LO                         | HE64SO                         | HE64MO                        | HE64HO                        | HE64VHO    |
| Lumens Output (3000K)<br>(with a Clear lens)    | 128 lm/ft                      | 277 lm/ft                      | 397 lm/ft                      | 528 lm/ft                     | 750 lm/ft                     | 1028 lm/ft |
| Average Power Consumption<br>(for a 4' section) | 1 W/ft                         | 1.9 W/ft                       | 2.9 W/ft                       | 3.8 W/ft                      | 5.6 W/ft                      | 7.1 W/ft   |
| Efficacy                                        | 128 lm/W                       | 146 lm/W                       | 137 lm/W                       | 139 lm/W                      | 134 lm/W                      | 145 lm/W   |
| Max Run Length<br>(in series)                   | 90 ft                          | 54 ft                          | 34.9 ft                        | 26 ft                         | 17 ft                         | 13 ft      |
| Ambient Operating Temperature Range*            | -4°F - 122°F<br>(-20°C - 50°C) | -4°F - 113°F<br>(-20°C - 45°C) | -4°F - 104°F<br>(-20°C - 40°C) | -4°F - 86°F<br>(-20°C - 30°C) | -4°F - 77°F<br>(-20°C - 25°C) |            |

\* Ambient Operating Temperature Range to maintain L70 of 50k+ hours in normal mounting conditions for the fixture. Exceeding Ambient Operating Temperature Range may result in decreased life/output. Consult Technical Support for specific inquiries.

### Vibrant Color (VC72)

| CCT   | Multiplier<br>(ref. - 30K) | CRI | TM-30          |                |                |
|-------|----------------------------|-----|----------------|----------------|----------------|
|       |                            |     | R <sub>f</sub> | R <sub>g</sub> | R <sub>9</sub> |
| 1800K | 0.50                       | 95  | 94             | 99             | 86             |
| 2200K | 0.66                       | 96  | 94             | 101            | 95             |
| 2400K | 0.90                       | 98  | 96             | 101            | 91             |
| 2700K | 0.93                       | 98  | 96             | 102            | 93             |
| 3000K | 1.00                       | 97  | 94             | 104            | 99             |
| 3500K | 1.04                       | 96  | 94             | 105            | 97             |
| 4100K | 1.05                       | 97  | 95             | 104            | 96             |

### High Efficacy (HE64)

| CCT   | Multiplier<br>(ref. - 30K) | CRI | TM-30          |                |                |
|-------|----------------------------|-----|----------------|----------------|----------------|
|       |                            |     | R <sub>f</sub> | R <sub>g</sub> | R <sub>9</sub> |
| 2200K | 0.74                       | 94  | 91             | 96             | 65             |
| 2400K | 0.87                       | 94  | 92             | 97             | 56             |
| 2700K | 0.97                       | 94  | 92             | 100            | 57             |
| 3000K | 1.00                       | 93  | 91             | 99             | 54             |
| 3500K | 1.01                       | 95  | 91             | 99             | 62             |
| 4000K | 1.04                       | 95  | 91             | 99             | 68             |

## Ordering Code

| MODEL                  | LENGTH <sup>1</sup>       | OUTPUT <sup>2</sup>                                                                                                | CCT                                                                                                   | LENS                                                                                  | MOUNTING                                                                                            | FINISH <sup>3</sup>                                                                                                                                                                                                                  | FEED POSITION LEFT <sup>5</sup>                                                                                                                              | FEED POSITION RIGHT <sup>5</sup>                                                                                                                             |
|------------------------|---------------------------|--------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| KRS - Kendo S Recessed | 12"-144"<br>1" increments | VC72VLO - Very Low<br>VC72LO - Low<br>VC72SO - Standard<br>VC72MO - Medium<br>VC72HO - High<br>VC72VHO - Very High | 18K - 1800K<br>22K - 2200K<br>24K - 2400K<br>27K - 2700K<br>30K - 3000K<br>35K - 3500K<br>41K - 4100K | C - Clear Lens<br>HF - Half Frosted<br>F - Frosted<br>FF - Flat Frosted<br>M - Medium | HS - Hard Surface<br>Mounting Bracket<br>GS - Gypsum Surface<br>Mounting Bracket<br>NB - No Bracket | BASE<br>SA - Silver Anodized<br><br>POWDER COAT<br>BK - Black<br>BZ - Bronze<br>WH - White<br><br>PREMIUM<br>MBK - Matte Black<br>WN - Warm Nickel<br>AB - Aged Brass<br>PG - Polished Gold <sup>4</sup><br>CH - Chrome <sup>4</sup> | PLENUM WIRE LEADS (72")<br>LPB - Wire Back Feed<br>LNPF - No Power Feed<br><br>QUICK CONNECTS (4")<br>LFB - Female Q/C,<br>Back Feed<br>LNPF - No Power Feed | PLENUM WIRE LEADS (72")<br>RPB - Wire Back Feed<br>RNPF - No Power Feed<br><br>QUICK CONNECTS (4")<br>RFB - Female Q/C,<br>Back Feed<br>RNPF - No Power Feed |
|                        | 12"-144"<br>2" increments | HE64VLO - Very Low<br>HE64LO - Low<br>HE64SO - Standard<br>HE64MO - Medium<br>HE64HO - High<br>HE64VHO - Very High | 22K - 2200K<br>24K - 2400K<br>27K - 2700K<br>30K - 3000K<br>35K - 3500K<br>40K - 4000K                |                                                                                       |                                                                                                     |                                                                                                                                                                                                                                      |                                                                                                                                                              |                                                                                                                                                              |

1 - Custom lengths and increments are available, please consult Inside Sales with specific request.

2 - Title 24 JA8 achievable depending on Output, CCT, and Lens selections. See multiplier charts to calculate specific efficacies.


3 - Non Base finishes may have extended lead times. Custom RALs are available, please consult Inside Sales with specific request.

4 - Polished Gold finishes and Chrome finishes have a maximum fixture length of 96".


5 - LNPF - RNPF is not a valid configuration option

## Powerfeeds and Connectors


### Power Feed Position Options and Orientation

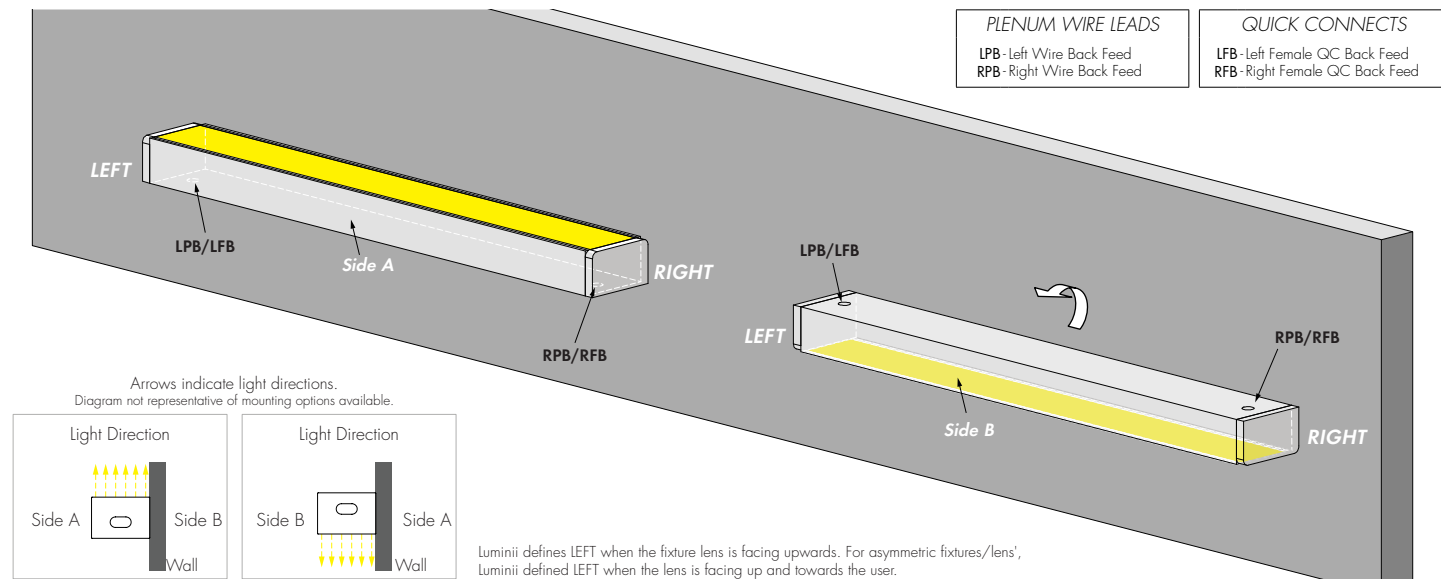


### Linking and Extension Cable Options

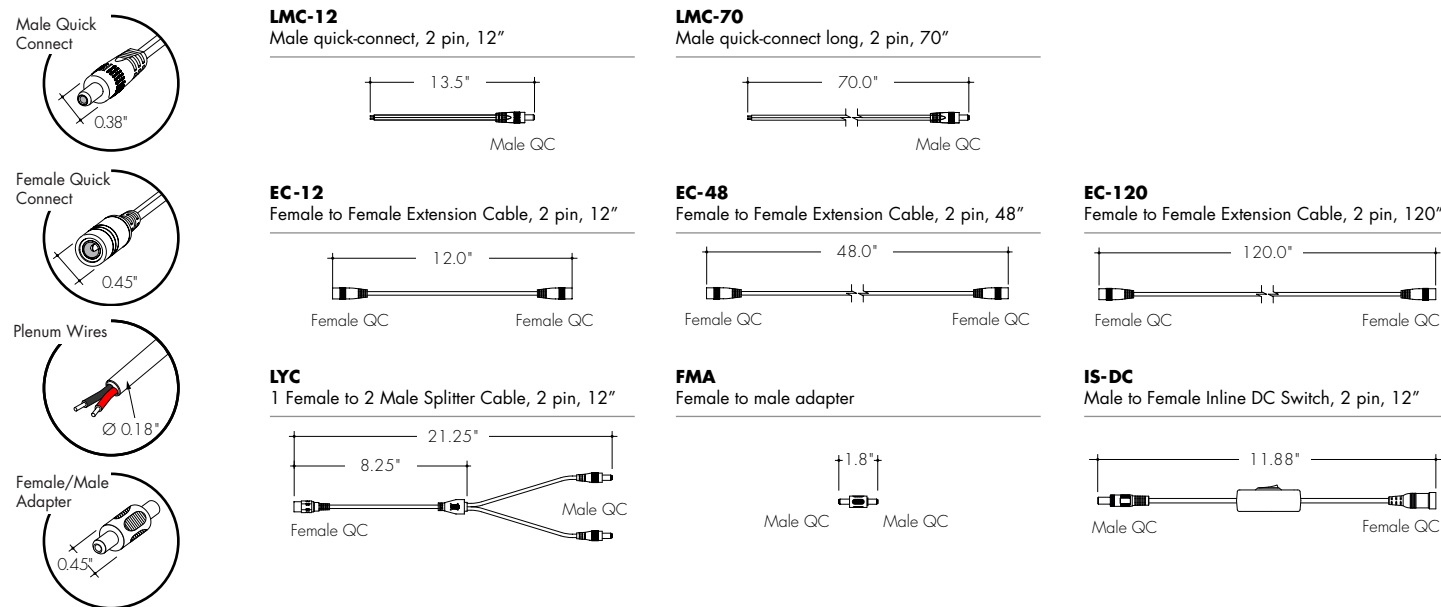

### Sample Layout

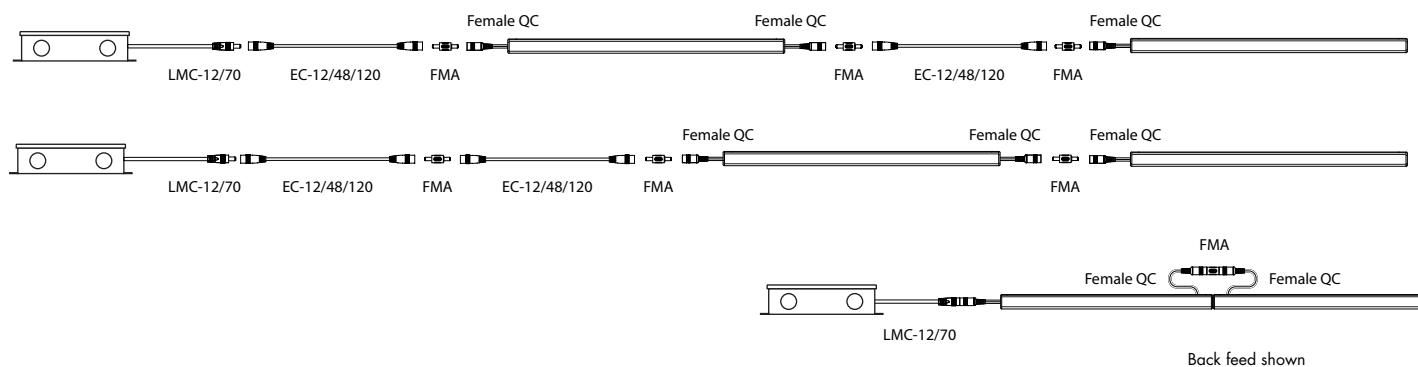

## Product Dimensions

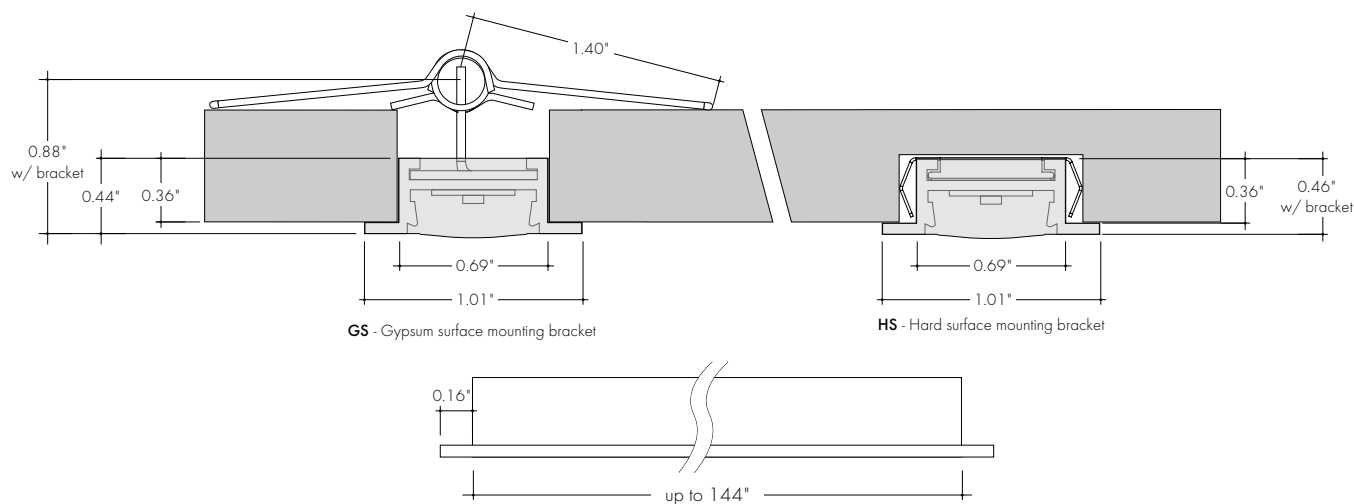


Note: Spring Bracket minimum ceiling thickness is 3/8", maximum ceiling thickness for drywall is 5/8".

## Finish Options

- Finish options are available in a wide variety, allowing for complete customization of style and aesthetic.
- Non Base finishes may have extended lead times and price adder.
- Polished Gold and Chrome finishes have a maximum fixture length of 96".
- Custom RALs are available, please consult Inside Sales with specific request.

**Silver Anodized**  
Base



Silver Anodized is a soft silver with a clear finish.

**Black**  
Powder Coat



Black is a true deep black with a glossy finish.

**Bronze**  
Powder Coat



Bronze is a rich, dark brown with a satin finish.

**White**  
Powder Coat



White is a polar bright white and field paintable.

**Matte Black**  
Premium



Matte Black is a dark, pitch-black with a soft flat finish.

**Warm Nickel**  
Premium




Warm Nickel is a soft, silvery smoke with warm tones and a satin finish.

**Aged Brass**  
Premium




Aged Brass is a deep brown shade with slightly golden undertones.

**Polished Gold**  
Premium



Polished Gold is bright and radiant for a brilliant finish.

**Chrome**  
Premium




Chrome is a highly reflective silver polish.

## Light Transmission and Dotting

| Output Options          | Lens/Accessory |     |     |    |             |     |     |    |                   |     |     |    |              |     |     |    |                   |     |     |    |
|-------------------------|----------------|-----|-----|----|-------------|-----|-----|----|-------------------|-----|-----|----|--------------|-----|-----|----|-------------------|-----|-----|----|
|                         | Clear Lens     |     |     |    | Medium Lens |     |     |    | Half-Frosted Lens |     |     |    | Frosted Lens |     |     |    | Flat-Frosted Lens |     |     |    |
| Dimming Level           | 100%           | 50% | 10% | 1% | 100%        | 50% | 10% | 1% | 100%              | 50% | 10% | 1% | 100%         | 50% | 10% | 1% | 100%              | 50% | 10% | 1% |
| VC72VLO                 | CD             | CD  | CD  | CD | CD          | CD  | CD  | CD | ND                | SD  | SD  | CD | ND           | ND  | ND  | ND | ND                | ND  | ND  | ND |
| VC72LO                  | CD             | CD  | CD  | CD | CD          | CD  | CD  | CD | ND                | SD  | SD  | CD | ND           | ND  | ND  | ND | ND                | ND  | ND  | ND |
| VC72SO                  | CD             | CD  | CD  | CD | CD          | CD  | CD  | CD | ND                | SD  | SD  | CD | ND           | ND  | ND  | ND | ND                | ND  | ND  | ND |
| VC72MO                  | CD             | CD  | CD  | CD | CD          | CD  | CD  | CD | ND                | SD  | SD  | CD | ND           | ND  | ND  | ND | ND                | ND  | ND  | ND |
| VC72HO                  | CD             | CD  | CD  | CD | CD          | CD  | CD  | CD | ND                | SD  | SD  | CD | ND           | ND  | ND  | ND | ND                | ND  | ND  | ND |
| VC72VHO                 | CD             | CD  | CD  | CD | CD          | CD  | CD  | CD | ND                | SD  | SD  | CD | ND           | ND  | ND  | ND | ND                | ND  | ND  | ND |
| HE64VLO                 | CD             | CD  | CD  | CD | CD          | CD  | CD  | CD | CD                | CD  | CD  | CD | ND           | ND  | ND  | ND | ND                | ND  | ND  | ND |
| HE64LO                  | CD             | CD  | CD  | CD | CD          | CD  | CD  | CD | CD                | CD  | CD  | CD | ND           | ND  | ND  | ND | ND                | ND  | ND  | ND |
| HE64SO                  | CD             | CD  | CD  | CD | CD          | CD  | CD  | CD | CD                | CD  | CD  | CD | ND           | ND  | ND  | ND | ND                | ND  | ND  | ND |
| HE64MO                  | CD             | CD  | CD  | CD | CD          | CD  | CD  | CD | CD                | CD  | CD  | CD | ND           | ND  | ND  | ND | ND                | ND  | ND  | ND |
| HE64HO                  | CD             | CD  | CD  | CD | CD          | CD  | CD  | CD | CD                | CD  | CD  | CD | ND           | ND  | ND  | ND | ND                | ND  | ND  | ND |
| HE64VHO                 | CD             | CD  | CD  | CD | CD          | CD  | CD  | CD | CD                | CD  | CD  | CD | ND           | ND  | ND  | ND | ND                | ND  | ND  | ND |
| Transmission Percentage | 100%           |     |     |    | 94%         |     |     |    | 81%               |     |     |    | 64%          |     |     |    | 62%               |     |     |    |

Use complete Dotting Chart Tool online for more dotting information



CD - Clear Dotting


SD - Slight Dotting

ND - No Dotting

## Accessory Options


### LVSP-4T-BK

Low Voltage, 4 Terminal Splice Box, Black, IP20



### OS-DC-F4-BK


Occupancy Sensor



Male Quick Connect, FMA, ILC, LYC, or IS-DC are required for input and output.

### DIM-DC-F4-BK

24VDC Low Voltage In-line Dimmer Module




Male Quick Connect, FMA, ILC, LYC, or IS-DC are required for input and output.


### NL.EX.D1.B & NL.EX.D3.B

Near Infrared Remote Door Sensor

NL.EX.D1.B - 1 IR Sensor



NL.EX.D3.B - 3 IR Sensor

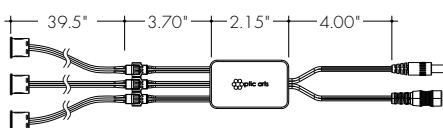


Male Quick Connect, FMA, ILC, LYC, or IS-DC are required for input and output. For more information visit Sensor Spec Sheet [\(Link\)](#)

## Photometry


KRS-48-VC72VHO-30K-C

Kendo RS, 4ft, VHO, 3000K, Clear Lens

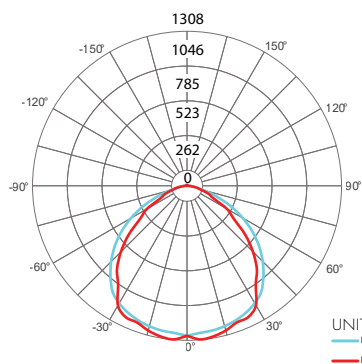


Zonal Lumen Summary 3000K

| Zone        | Lumen | % Fixture |
|-------------|-------|-----------|
| 0-30        | 251   | 30%       |
| 0-40        | 414   | 50%       |
| 0-60        | 705   | 84%       |
| 0-90        | 827   | 99%       |
| Total 0-180 | 835   | 100%      |



KRS-48-VC72VHO-30K-HF

Kendo RS, 4ft, VHO, 3000K, Half Frosted Lens

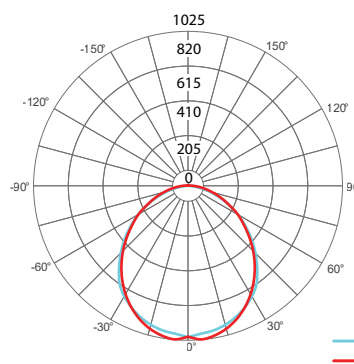


Zonal Lumen Summary 3000K

| Zone        | Lumen | % Fixture |
|-------------|-------|-----------|
| 0-30        | 193   | 28%       |
| 0-40        | 312   | 46%       |
| 0-60        | 537   | 79%       |
| 0-90        | 670   | 99%       |
| Total 0-180 | 678   | 100%      |




KRS-48-VC72VHO-30K-FE

Kendo RS, 4ft, VHO, 3000K, Flat Frosted Lens

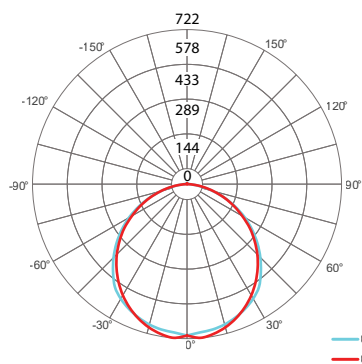


Zonal Lumen Summary 3000K

| Zone        | Lumen | % Fixture |
|-------------|-------|-----------|
| 0-30        | 138   | 27%       |
| 0-40        | 228   | 44%       |
| 0-60        | 405   | 78%       |
| 0-90        | 514   | 99%       |
| Total 0-180 | 520   | 100%      |



KRS-48-VC72VHO-30K-M

Kendo RS, 4ft, VHO, 3000K, Medium Lens

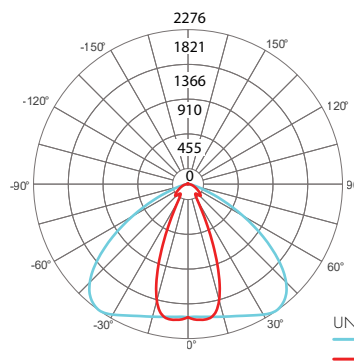


Zonal Lumen Summary 3000K

| Zone        | Lumen | % Fixture |
|-------------|-------|-----------|
| 0-30        | 352   | 45%       |
| 0-40        | 488   | 62%       |
| 0-60        | 688   | 87%       |
| 0-90        | 776   | 99%       |
| Total 0-180 | 787   | 100%      |



KRS-48-VC72VHO-30K-F

Kendo RS, 4ft, VHO, 3000K, Frosted Lens

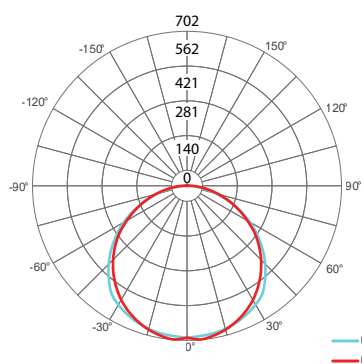

Zonal Lumen Summary 3000K

| Zone        | Lumen | % Fixture |
|-------------|-------|-----------|
| 0-30        | 136   | 25%       |
| 0-40        | 226   | 42%       |
| 0-60        | 409   | 76%       |
| 0-90        | 531   | 99%       |
| Total 0-180 | 538   | 100%      |



Power Consumption

Please visit the link/QR code below to access the Luminii Power Consumption Chart tool on our website.

There you will be able to select your fixture, output, and desired power feed to get a full power consumption table.



I'm also click-able

Desired Nominal Length:

Desired Output:

Desired CCT:

Voltage Drop Calculator

The below chart assumes nominal voltage of 24 Volts and a Voltage Drop Allowance of 3% through the wire

| Wattage<br>[W] | Wire Length From Power Supply to Start of Run [ft] |        |        |        |        |        |        |
|----------------|----------------------------------------------------|--------|--------|--------|--------|--------|--------|
|                | 12 AWG                                             | 14 AWG | 16 AWG | 18 AWG | 20 AWG | 22 AWG | 24 AWG |
| 5              | 1088.2                                             | 684.4  | 430.3  | 270.6  | 170.2  | 107.1  | 67.3   |
| 10             | 544.1                                              | 342.2  | 215.1  | 135.3  | 85.1   | 53.5   | 33.7   |
| 15             | 362.7                                              | 228.1  | 143.4  | 90.2   | 56.7   | 35.7   | 22.4   |
| 20             | 272.0                                              | 171.1  | 107.6  | 67.7   | 42.6   | 26.8   | 16.8   |
| 25             | 217.6                                              | 136.9  | 86.1   | 54.1   | 34.0   | 21.4   | 13.5   |
| 30             | 181.4                                              | 114.1  | 71.7   | 45.1   | 28.4   | 17.8   | 11.2   |
| 35             | 155.5                                              | 97.8   | 61.5   | 38.7   | 24.3   | 15.3   | 9.6    |
| 40             | 136.0                                              | 85.5   | 53.8   | 33.8   | 21.3   | 13.4   | 8.4    |
| 45             | 120.9                                              | 76.0   | 47.8   | 30.1   | 18.9   | 11.9   | 7.5    |
| 50             | 108.8                                              | 68.4   | 43.0   | 27.1   | 17.0   | 10.7   | 6.7    |
| 55             | 98.9                                               | 62.2   | 39.1   | 24.6   | 15.5   | 9.7    | 6.1    |
| 60             | 90.7                                               | 57.0   | 35.9   | 22.6   | 14.2   | 8.9    | 5.6    |
| 65             | 83.7                                               | 52.6   | 33.1   | 20.8   | 13.1   | 8.2    | 5.2    |
| 70             | 77.7                                               | 48.9   | 30.7   | 19.3   | 12.2   | 7.6    | 4.8    |
| 75             | 72.5                                               | 45.6   | 28.7   | 18.0   | 11.3   | 7.1    | 4.5    |
| 80             | 68.0                                               | 42.8   | 26.9   | 16.9   | 10.6   | 6.7    | 4.2    |
| 85             | 64.0                                               | 40.3   | 25.3   | 15.9   | 10.0   | 6.3    | 4.0    |
| 90             | 60.5                                               | 38.0   | 23.9   | 15.0   | 9.5    | 5.9    | 3.7    |
| 96             | 56.7                                               | 35.6   | 22.4   | 14.1   | 8.9    | 5.6    | 3.5    |

Power Supplies

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

For use with Static White


Ordering Code - Universal Dimming Power Supplies 0.1% 120VAC - 277VAC

| MODEL                         | INPUT CONTROL                                    | WATTAGE                                                              | OUTPUT      |
|-------------------------------|--------------------------------------------------|----------------------------------------------------------------------|-------------|
| PS - Power Supply, 120-277VAC | UNI - 0-10V Dimming (0.1%), Phase Dimming (0.1%) | 30 - 30 Watts<br>60 - 60 Watts<br>96 - 96 Watts<br>3x96 - 3x96 Watts | 24 - 24 VDC |

Compatibility: View a complete list of compatible dimmers on the PS-UNI product page.

0-10V - 0.1% dimming  
MLV/ELV/TRIAC - 0.1% dimming, consult dimming compatibility chart

| MODELS | PS-UNI-30W | PS-UNI-60W | PS-UNI-96W | PS-UNI-3X96W |
|--------|------------|------------|------------|--------------|
| Length | 6.50"      | 7.40"      | 8.66"      | 11.85"       |
| Width  | 3.73"      | 3.73"      | 3.73"      | 4.32"        |
| Depth  | 1.61"      | 1.61"      | 1.61"      | 1.81"        |

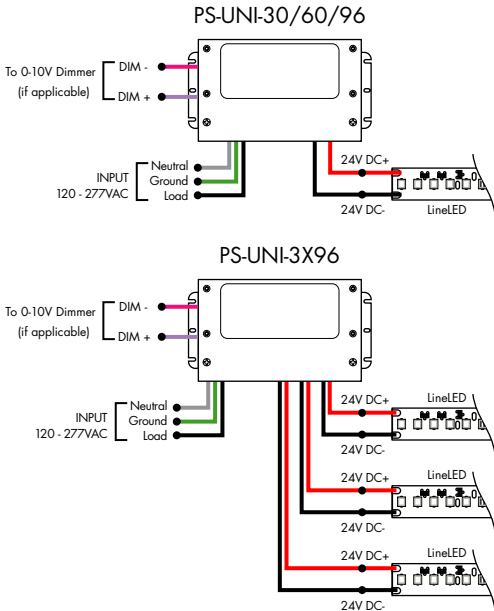


For use with Static White

Ordering Code - 0-10V Dimming Power Supplies 0.1% 120VAC - 277VAC

| MODEL                         | INPUT CONTROL                                                                           | ENVIRONMENT | WATTAGE                            | OUTPUT      |
|-------------------------------|-----------------------------------------------------------------------------------------|-------------|------------------------------------|-------------|
| PS - Power Supply, 120-277VAC | 010V-LIN - 0-10V Dimming (0.1%), Linear<br>010V-LOG - 0-10V Dimming (0.1%), Logarithmic | D - Dry     | 96 - 96 Watts<br>3x96 - 3x96 Watts | 24 - 24 VDC |

| MODELS | 96W    | 3X96   |
|--------|--------|--------|
| Length | 14.40" | 15.00" |
| Width  | 5.20"  | 6.62"  |
| Depth  | 2.60"  | 4.45"  |

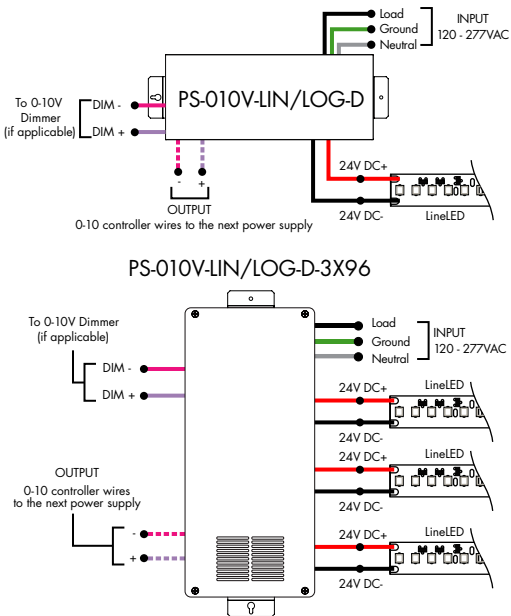


## Power Supplies

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

### For use with Static White

#### Ordering Code - Athena 0-10V LED Driver

| MODEL                            | INPUT CONTROL                                                                                 | ENVIRONMENT | WATTAGE     | OUTPUT    | FEATURE      |
|----------------------------------|-----------------------------------------------------------------------------------------------|-------------|-------------|-----------|--------------|
| PS - Power Supply,<br>120-277VAC | 010V-LIN - 0-10V Dimming (0.1%),<br>Linear<br>010V-LOG - 0-10V Dimming (0.1%),<br>Logarithmic | D-Dry       | 96-96 Watts | 24-24 VDC | AWNDR-Athena |

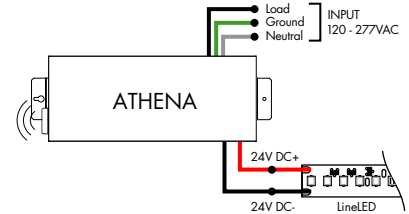


| MODELS | 96W    |
|--------|--------|
| Length | 14.40" |
| Width  | 5.20"  |
| Depth  | 2.60"  |

### For use with Static White

#### Ordering Code - DALI 2 Dimming Power Supplies 0.1% 120VAC - 277VAC

| MODEL                            | INPUT CONTROL                   | ENVIRONMENT | WATTAGE     | OUTPUT    |
|----------------------------------|---------------------------------|-------------|-------------|-----------|
| PS - Power Supply,<br>120-277VAC | DALI2-DT6 - DALI2 DT6<br>(0.1%) | D-Dry       | 96-96 Watts | 24-24 VDC |

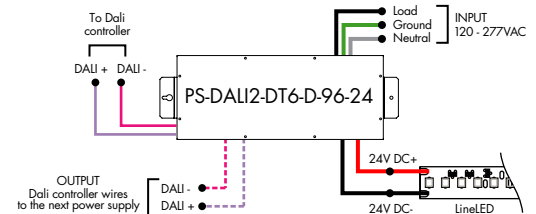


| Model  | 96W    |
|--------|--------|
| Length | 14.40" |
| Width  | 5.20"  |
| Depth  | 2.60"  |


### For use with Static White

#### Ordering Code - DALI Dimming Power Supplies 0.1% 120VAC - 277VAC

| MODEL                            | INPUT CONTROL      | ENVIRONMENT | WATTAGE                        | OUTPUT    |
|----------------------------------|--------------------|-------------|--------------------------------|-----------|
| PS - Power Supply,<br>120-277VAC | DALI - DALI (0.1%) | D-Dry       | 96-96 Watts<br>3x96-3x96 Watts | 24-24 VDC |

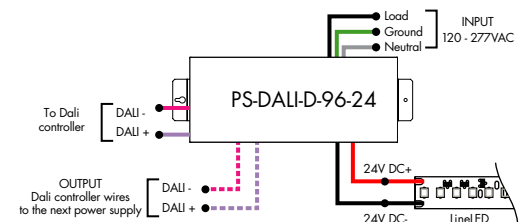

| Model  | 96W    | 3X96   |
|--------|--------|--------|
| Length | 14.40" | 15.00" |
| Width  | 5.20"  | 6.62"  |
| Depth  | 2.60"  | 4.56"  |

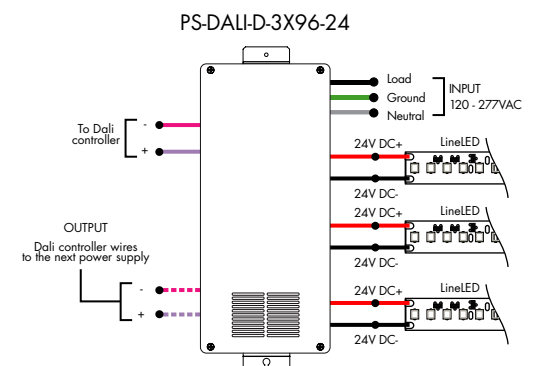

## Power Supplies

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.



### For use with Static White

#### Ordering Code - DMX Dimming Power Supplies 0.1% 120VAC - 277VAC

| MODEL                         | INPUT CONTROL    | ENVIRONMENT | WATTAGE                            | OUTPUT      |
|-------------------------------|------------------|-------------|------------------------------------|-------------|
| <div></div>                   | <div></div>      | <div></div> | <div></div>                        | <div></div> |
| PS - Power Supply, 120-277VAC | DMX - DMX (0.1%) | D - Dry     | 96 - 96 Watts<br>3x96 - 3x96 Watts | 24 - 24 VDC |

| MODELS | 96W    | 3X96   |
|--------|--------|--------|
| Length | 14.40" | 15.00" |
| Width  | 5.20"  | 6.62"  |
| Depth  | 2.60"  | 4.56"  |

ZONAL CONTROL POWER SUPPLIES.  
CONTROL MULTIPLE TAPES/ZONES USING DMX CHANNELS.

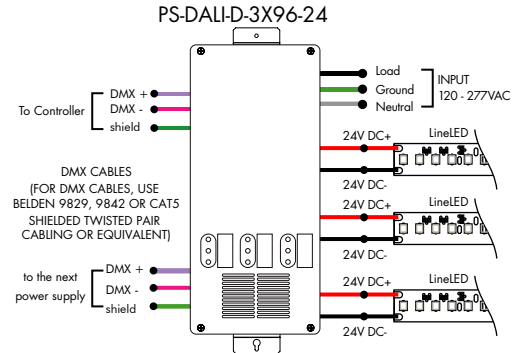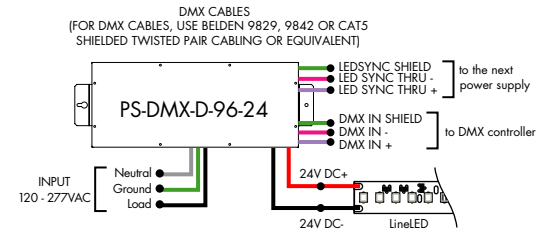


### For use with Static White

#### Ordering Code - Non-Dimming Power Supply, 120VAC - 277VAC

| MODEL                         | INPUT CONTROL    | ENVIRONMENT | WATTAGE       | OUTPUT      |
|-------------------------------|------------------|-------------|---------------|-------------|
| <div></div>                   | <div></div>      | <div></div> | <div></div>   | <div></div> |
| PS - Power Supply, 120-277VAC | ND - Non Dimming | D - Dry     | 96 - 96 Watts | 24 - 24 VDC |

| MODELS | 96W    |
|--------|--------|
| Length | 14.40" |
| Width  | 5.20"  |
| Depth  | 2.60"  |

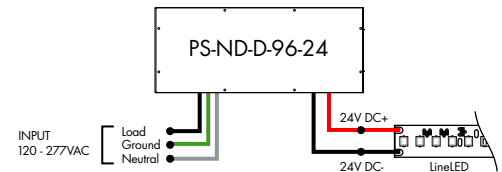


### For use with Static White

#### Ordering Code - In-Ground Power Supplies

| MODEL                                                                                        | INPUT CONTROL          | ENVIRONMENT    | WATTAGE           | OUTPUT      |
|----------------------------------------------------------------------------------------------|------------------------|----------------|-------------------|-------------|
| <div></div>                                                                                  | <div></div>            | <div></div>    | <div></div>       | <div></div> |
| PS120 - Power Supply, 120VAC<br>PS240 - Power Supply, 240VAC<br>PS277 - Power Supply, 277VAC | ELV - ELV Dimming (1%) | IG - In Ground | 2X96 - 2X96 Watts | 24 - 24 VDC |

| MODELS | 2X96W |
|--------|-------|
| Length | 8.40" |
| Width  | 8.30" |
| Depth  | 8.10" |

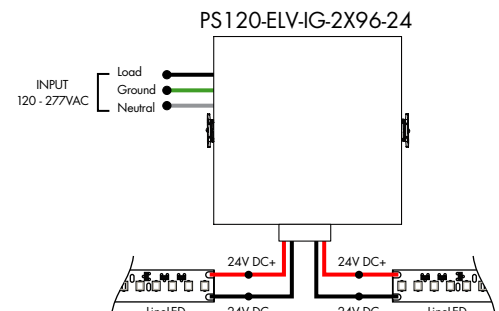

Power Supplies

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.



Luminii is a Lutron OEM Advantage Partner


Lutron Power Supplies 1%

MODEL

L3DA4U1UKL-CV240

HiLume™ 1% EcoSystem Voltage LED driver 40W max

| MODELS | L3DA4U1UKL-CV240 |
|--------|------------------|
| Length | 4.98"            |
| Width  | 4.00"            |
| Depth  | 2.62"            |

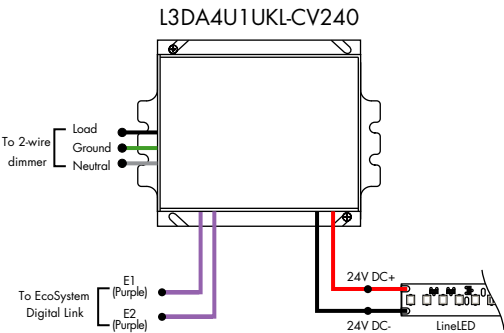

Luminii is a Lutron OEM Advantage Partner

Lutron Power Supplies 0.1%

MODEL

L3D0-96W24V-U

HiLume™ 0.1% EcoSystem Voltage LED Driver with Soft-On, Fade-to-Black™  
96W max

| MODELS | L3D0   |
|--------|--------|
| Length | 10.50" |
| Width  | 5.50"  |
| Depth  | 2.00"  |

