




**Features**

- 24VDC Class 2 fixtures made to order up to 144". Fixtures can be linked together to form one continuous run
- Available with plenum rated wire leads or with integral junction box for splice connection
- Continuous Lens may be ordered separately for multi-fixture runs to create an even, seamless appearance
- Mounting hardware is included with the fixture
- Average Life (L70): 50,000hrs
- Proprietary strong bond solder method handles up to 50 lbs of pull force on wire leads and connectors
- Dot free even illumination with frosted lens
- Vibrant Color options offer premium color quality with R9 values up to 98
- High Efficacy options offer best in class output and efficacy with over 1710 lm/ft and up to 121 lm/W
- 7 year warranty

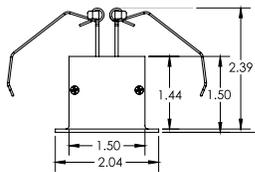

**Finish Options** (see page 3 for additional information)

- Base  Silver Anodized
- Powder Coat  Black  Bronze  White
- Premium  Matte Black  Warm Nickel  Aged Brass  Polished Gold  Chrome



**Technical Information**

TYPE	Vibrant Color VC72					
OUTPUT OPTIONS	2x VC72VLO	2x VC72LO	2x VC72SO	2x VC72MO	2x VC72HO	2x VC72VHO
Lumens Output (3000K) (with a Frosted Lens)	193 lm/ft	491 lm/ft	654 lm/ft	864 lm/ft	1045 lm/ft	1392 lm/ft
Average Power Consumption (for a 4" section)	2.2 W/ft	5.6 W/ft	7.4 W/ft	9.8 W/ft	11.8 W/ft	15.8 W/ft
Efficacy	88 lm/W	88 lm/W	88 lm/W	88 lm/W	89 lm/W	88 lm/W
Max Run Length (individual fixture)	28.5 ft	16 ft	14 ft	12 ft	10.5 ft	9 ft
Ambient Operating Temperature Range*	-4°F - 122°F (-20°C - 50°C)		-4°F - 113°F (-20°C - 45°C)	-4°F - 104°F (-20°C - 40°C)	-4°F - 95°F (-20°C - 35°C)	-4°F - 86°F (-20°C - 30°C)

\*Ambient Operating Temperature Range to maintain L70 of 50k+ hours in normal mounting conditions for the fixture. Exceeding Ambient Operating Temperature Range may result in decreased life/output. Consult Technical Support for specific inquiries.

TYPE	High Efficacy HE64					
OUTPUT OPTIONS	2x HE64VLO	2x HE64LO	2x HE64SO	2x HE64MO	2x HE64HO	2x HE64VHO
Lumens Output (3000K) (with a Frosted Lens)	214 lm/ft	461 lm/ft	661 lm/ft	879 lm/ft	1249 lm/ft	1713 lm/ft
Average Power Consumption (for a 4" section)	2 W/ft	3.8 W/ft	5.8 W/ft	7.6 W/ft	11.2 W/ft	14.2 W/ft
Efficacy	107 lm/W	121 lm/W	114 lm/W	116 lm/W	112 lm/W	121 lm/W
Max Run Length (individual fixture)	45 ft	27.4 ft	17.4 ft	13 ft	8.5 ft	6.5 ft
Ambient Operating Temperature Range*	-4°F - 122°F (-20°C - 50°C)		-4°F - 113°F (-20°C - 45°C)		-4°F - 95°F (-20°C - 35°C)	-4°F - 86°F (-20°C - 30°C)

\*Ambient Operating Temperature Range to maintain L70 of 50k+ hours in normal mounting conditions for the fixture. Exceeding Ambient Operating Temperature Range may result in decreased life/output. Consult Technical Support for specific inquiries.

CCT	Multiplier (ref. - 30K)	CRI	TM-30		
			R <sub>f</sub>	R <sub>g</sub>	R <sub>9</sub>
1800K	0.50	95	94	99	86
2200K	0.66	96	94	101	95
2400K	0.90	98	96	101	91
2700K	0.93	98	96	102	93
3000K	1.00	97	94	104	99
3500K	1.04	96	94	105	97
4100K	1.05	97	95	104	96

CCT	Multiplier (ref. - 30K)	CRI	TM-30		
			R <sub>f</sub>	R <sub>g</sub>	R <sub>9</sub>
2200K	0.74	94	91	96	65
2400K	0.87	94	92	97	56
2700K	0.97	94	92	100	57
3000K	1.00	93	91	99	54
3500K	1.01	95	91	99	62
4000K	1.04	95	91	99	68

**Ordering Code**


MODEL	LENGTH <sup>1</sup>	OUTPUT <sup>2</sup>	CCT	LENS <sup>3</sup>	FINISH <sup>4</sup>	LEFT END CAP (A)	RIGHT END CAP (B)	POWER FEED LEFT END <sup>6</sup>	POWER FEED RIGHT END <sup>6</sup>
KR - Kilo Recessed	12"-144" 1" increments	VC72VLO - Very Low VC72LO - Low VC72SO - Standard VC72MO - Medium VC72HO - High VC72VHO - Very High	18K - 1800K 22K - 2200K 24K - 2400K 27K - 2700K 30K - 3000K 35K - 3500K 41K - 4100K	F - Frosted C - Clear N - No Lens	BASE SA - Silver Anodized  POWDER COAT BK - Black BZ - Bronze WH - White  PREMIUM MBK - Matte Black WN - Warm Nickel AB - Aged Brass PG - Polished Gold <sup>5</sup> CH - Chrome <sup>5</sup>	LE - Endcap Left End LN - No Endcap Left End	RE - Endcap Right End RN - No Endcap Right End	PLENUM WIRE LEADS LPB - Back Wire Leads LNPF - No Power Feed	PLENUM WIRE LEADS RNPf - No Power Feed RPB - Back Wire Leads
	12"-144" 2" increments	HE64VLO - Very Low HE64LO - Low HE64SO - Standard HE64MO - Medium HE64HO - High HE64VHO - Very High	22K - 2200K 24K - 2400K 27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K					JUNCTION BOX LJB - Junction Box Left LNPF - No Power Feed	JUNCTION BOX RNPf - No Power Feed RJB - Junction Box Right

1 - Custom lengths and increments are available, please consult Inside Sales with specific request.  
 2 - Title 24 JA8 achievable depending on Output, CCT, and Lens selections. See multiplier charts to calculate specific efficacies.  
 3 - Continuous Lens may be ordered separately for multi-fixture runs to create an even, seamless appearance.  
 4 - Non Base finishes may have extended lead times. Custom RALs are available, please consult Inside Sales with specific request.


5 - Polished Gold finishes and Chrome finishes have a maximum fixture length of 96".  
 6 - Wire leads are plenum rated and 72" long. Junction Box comes with 24" non-plenum rated wire.  
 NOTE: Each Kilo Recesses fixture/section requires it's own home run to a power supply. They cannot be electrically connected together

**Kilo Recessed Corner Options**


**KR-FC**  
Flat Corner

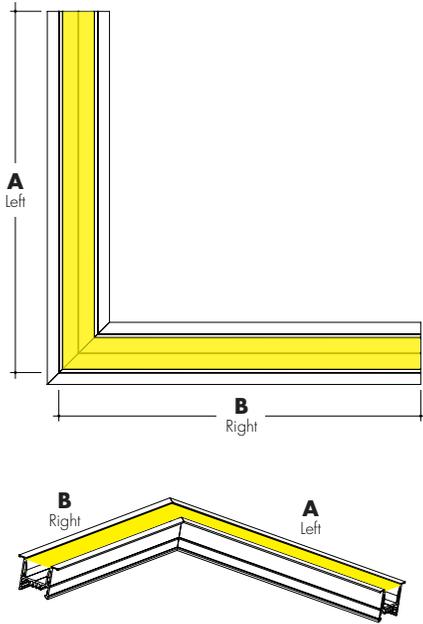

**KR-IC**  
Inner Corner

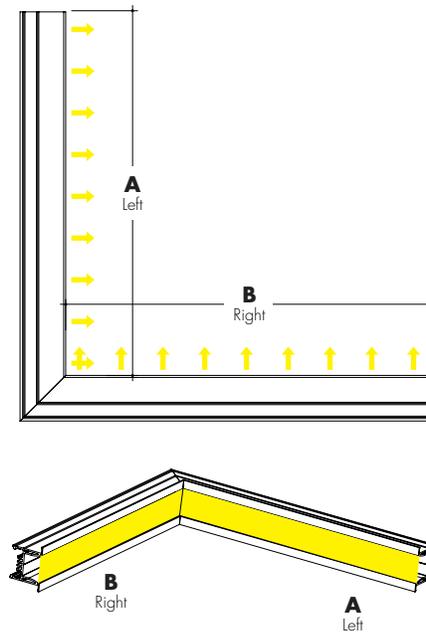

**KR-OC**  
Outside Corner

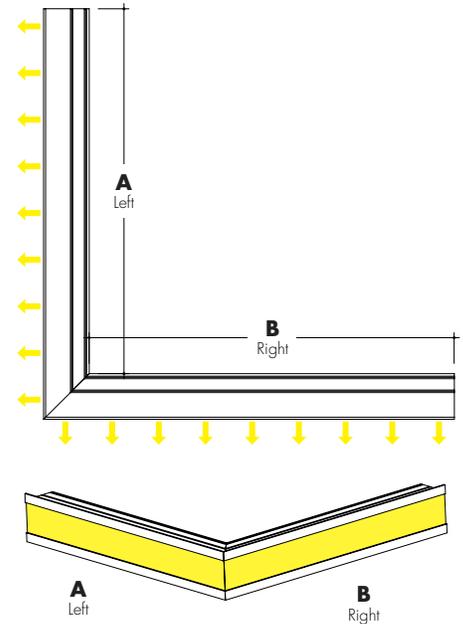

Note: Dimensions measured for the length of recessed needed

Vibrant Color	Actual Length		Total Wattage					
	A	B	2x VC72VLO	2x VC72LO	2x VC72SO	2x VC72MO	2x VC72HO	2x VC72VHO
<b>Corner Type</b>								
Flat (KR-FC)	12 8/16"	13 8/16"	4.3	11.4	14.8	19.8	25.4	32.0
Inner (KR-IC)	11 4/16"	11 4/16"	4.3	11.4	14.8	19.8	25.4	32.0
Outer (KR-OC)	13"	13"	4.3	11.4	14.8	19.8	25.4	32.0

High Efficacy	Actual Length		Total Wattage					
	A	B	2x HE64VLO	2x HE64LO	2x HE64SO	2x HE64MO	2x HE64HO	2x HE64VHO
<b>Corner Type</b>								
Flat (KR-FC)	12 12/16"	13 12/16"	4.0	7.8	11.9	16.3	23.5	29.6
Inner (KR-IC)	11 8/16"	11 8/16"	4.0	7.8	11.9	16.3	23.5	29.6
Outer (KR-OC)	13 4/16"	13 4/16"	4.0	7.8	11.9	16.3	23.5	29.6

**Ordering Code**



MODEL	CORNER	ANGLE	OUTPUT <sup>2</sup>	CCT	LENS <sup>3</sup>	FINISH <sup>4</sup>	LEFT END CAP (A)	RIGHT END CAP (B)	POWER FEED LEFT END <sup>5</sup>	POWER FEED RIGHT END <sup>5</sup>
KR-Kilo Recessed	IC-Inside Corner OC-Outside Corner FC-Flat Corner	90-90° C-Custom Angle Corner <sup>1</sup>	VC72VLO-Very Low VC72LO-Low VC72SO-Standard VC72MO-Medium VC72HO-High VC72VHO-Very High	18K-1800K 22K-2200K 24K-2400K 27K-2700K 30K-3000K 35K-3500K 41K-4100K	F-Frosted C-Clear N-None	BASE SA-Silver Anodized  POWDER COAT BK-Black BZ-Bronze WH-White  PREMIUM MBK-Matte Black WN-Warm Nickel AB-Aged Brass PG-Polished Gold <sup>5</sup> CH-Chrome <sup>5</sup>	LE-Endcap Left End LN-No Endcap Left End	RE-Endcap Right End RN-No Endcap Right End	PLENUM WIRE LEADS LPB-Back Wire Leads LNPF-No Power Feed	PLENUM WIRE LEADS RNPF-No Power Feed RPB-Back Wire Leads
			HE64VLO-Very Low HE64LO-Low HE64SO-Standard HE64MO-Medium HE64HO-High HE64VHO-Very High	22K-2200K 24K-2400K 27K-2700K 30K-3000K 35K-3500K 40K-4000K					JUNCTION BOX LJB-Junction Box Left LNPF-No Power Feed	JUNCTION BOX RNPF-No Power Feed RJB-Junction Box Right

1 - Custom lengths and increments are available, please consult Inside Sales with specific request.  
 2 - Title 24 JAB achievable depending on Output, CCT, and Lens selections. See multiplier charts to calculate specific efficacies.  
 3 - Continuous lens may be ordered separately for multi-fixture runs to create an even, seamless appearance.  
 4 - Non Base finishes may have extended lead times. Custom RALs are available, please consult Inside Sales with specific request.  
 5 - Polished Gold finishes and Chrome finishes have a maximum fixture length of 96".  
 6 - Wire leads are plenum rated and 72" long. Junction Box comes with 24" non-plenum rated wire.  
 NOTE: Each Kilo Recesses fixture/section requires it's own home run to a power supply. They cannot be electrically connected together

**Product Dimensions**



**KR-XX-B**

Kilo Back Fed

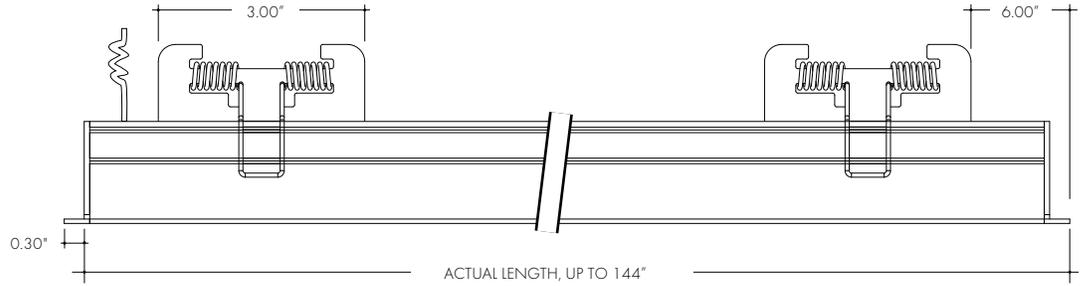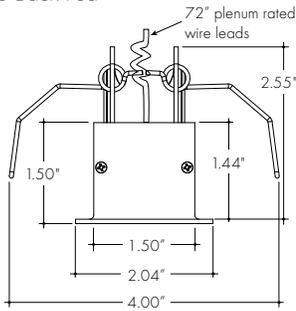

**KR-XX-JB**

Kilo Junction Box

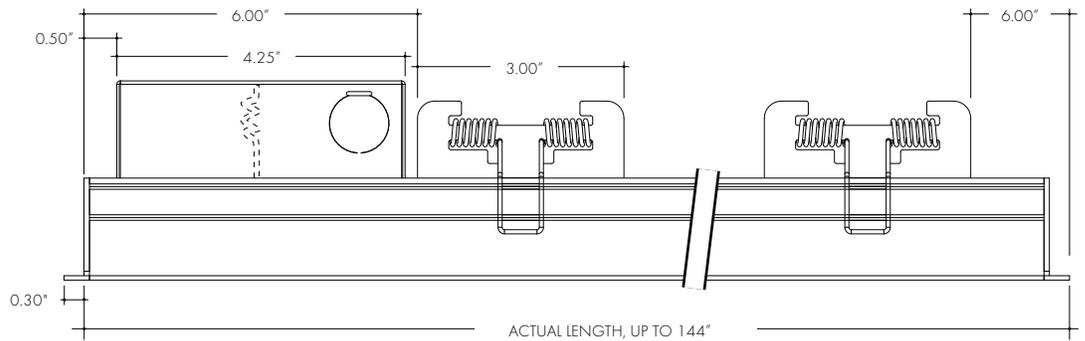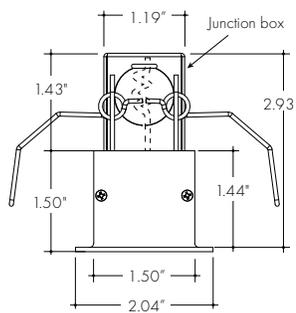

**Finish Options**

- Finish options are available in a wide variety, allowing for complete customization of style and aesthetic.
- Non Base finishes may have extended lead times and price adder.
- Polished Gold and Chrome finishes have a maximum fixture length of 96".
- Custom RALs are available, please consult Inside Sales with specific request.

**Silver Anodized Base**



Silver Anodized is a soft silver with a clear finish.

**Black Powder Coat**



Black is a true deep black with a glossy finish.

**Bronze Powder Coat**



Bronze is a rich, dark brown with a satin finish.

**White Powder Coat**



White is a polar bright white and field paintable.

**Matte Black Premium**



Matte Black is a dark, pitch-black with a soft flat finish.

**Warm Nickel Premium**



Warm Nickel is a soft, silvery smoke with warm tones and a satin finish.

**Aged Brass Premium**



Aged Brass is a deep brown shade with slightly golden undertones.

**Polished Gold Premium**



Polished Gold is bright and radiant for a brilliant finish.

**Chrome Premium**



Chrome is a highly reflective silver polish.

**Powerfeed options for Straight Fixtures**

**KR-XX-LPB-RNPF**

Wire leads, plenum rated CL3R cable on left end of Straight Fixture



**KR-XX-LJB-RNPF**

One integrated junction box on left end of Straight fixture



**KR-XX-LNPF-RPB**

Wire leads, plenum rated CL3R cable on right end of Straight Fixture



**KR-XX-LNPF-RJB**


One integrated junction box on right end of Straight fixture



**Powerfeed options for Corner Fixtures**

**KR-FC-90-XX-LJB-RNPF**


One integrated junction box on left end of Flat Corner fixture

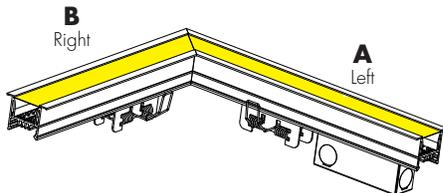

Note: Plenum wires are not shown, but they would be on the same end as the junction box

**KR-FC-90-XX-RNPF-RJB**


One integrated junction box on right end of Flat Corner fixture

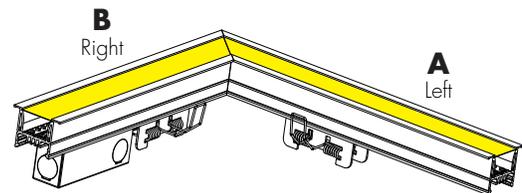

Note: Plenum wires are not shown, but they would be on the same end as the junction box

**KR-IC-90-XX-LJB-RNPF**


One integrated junction box on left end of Inside Corner fixture

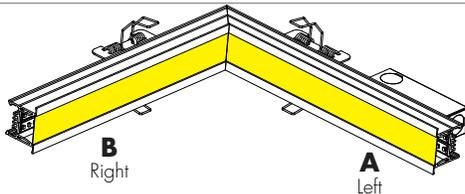

Note: Plenum wires are not shown, but they would be on the same end as the junction box

**KR-IC-90-XX-RNPF-RJB**


One integrated junction box on right end of Inside Corner fixture

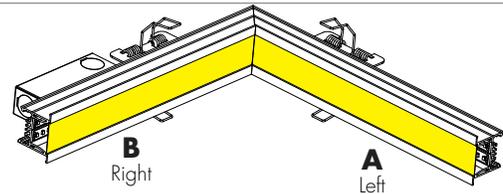

Note: Plenum wires are not shown, but they would be on the same end as the junction box

**KR-OC-90-XX-LJB-RNPF**


One integrated junction box on left end of Outside Corner fixture

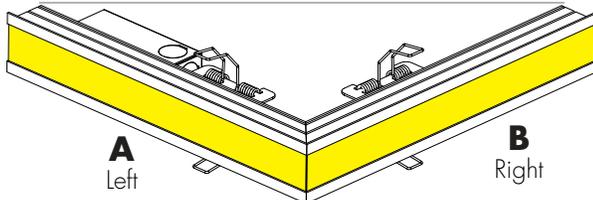

Note: Plenum wires are not shown, but they would be on the same end as the junction box

**KR-OC-90-XX-RNPF-RJB**

One integrated junction box on right end of Outside Corner fixture

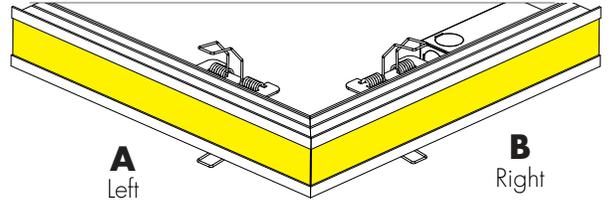


Note: Plenum wires are not shown, but they would be on the same end as the junction box

Sample Layout of Power Feed


**KR-XX-LE-RE-LPB-RNPF**

Kilo Recessed with back feed

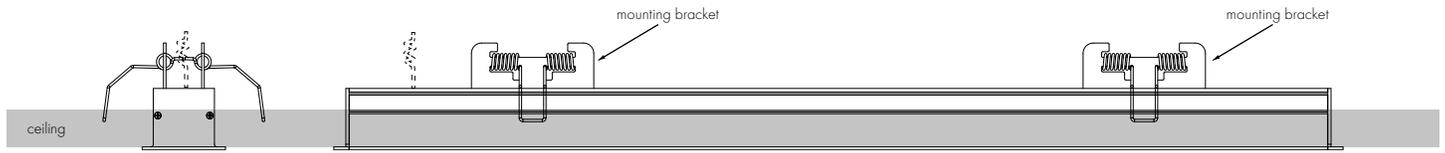


**KR-XX-LE-RE-LJB-RNPF**

Kilo Recessed with left endcap, with right endcap, with Junction Box

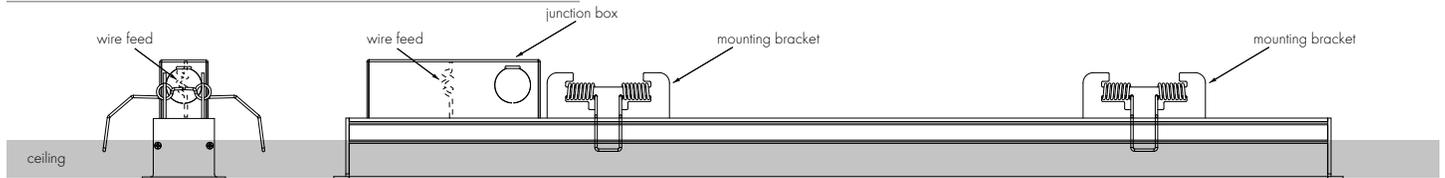



**KR-XX-LE-RN-LJB-RNPF**

Kilo Recessed with left endcap, without right endcap, with Junction Box on left

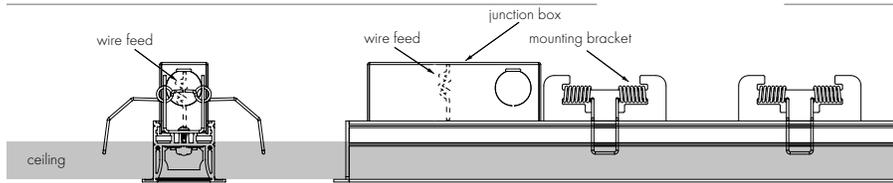


**KR-XX-LN-RE-LNPF-RPB**

Kilo Recessed without left endcap, with right endcap, with plenum wire leads on right

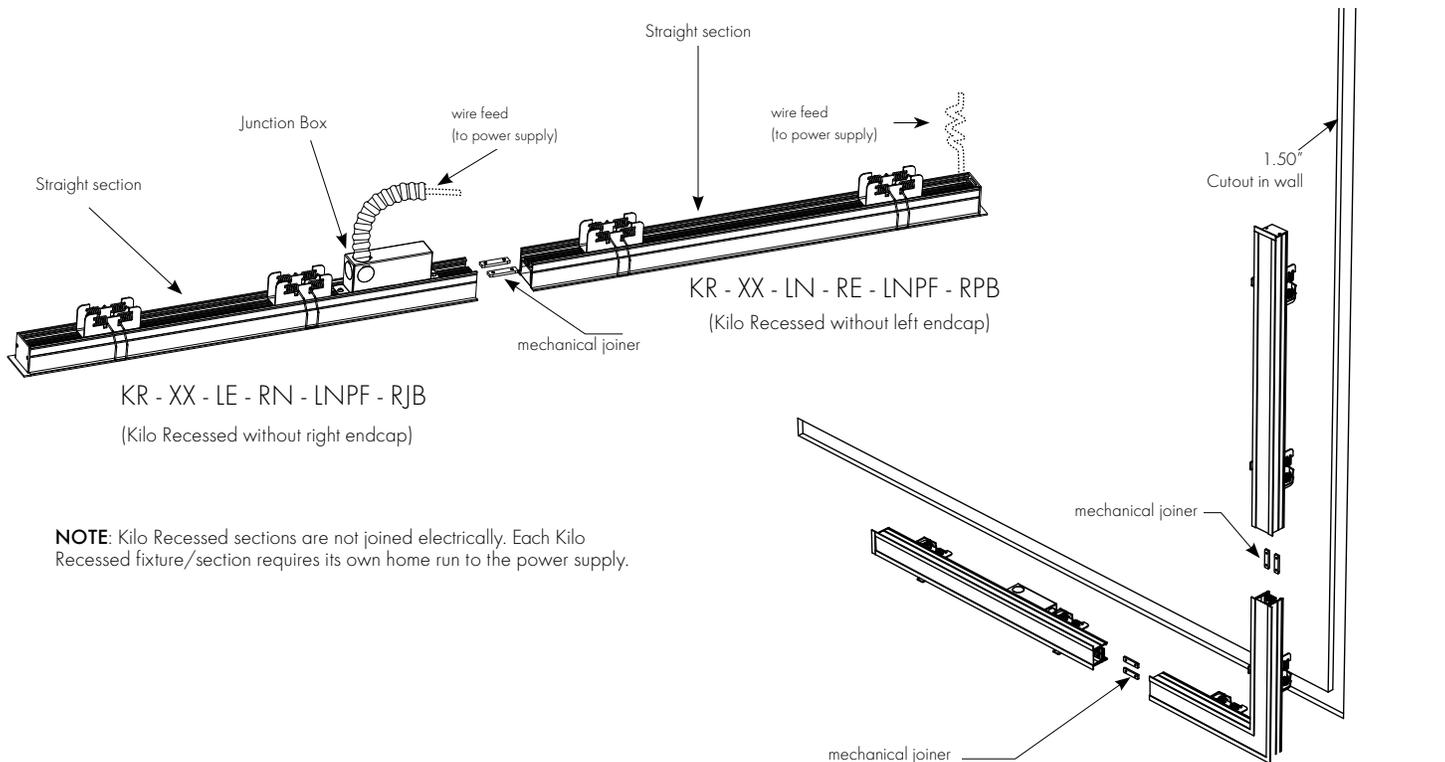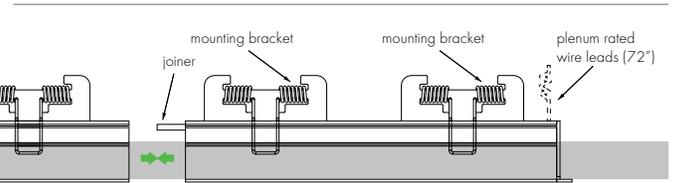

**NOTE:** Kilo Recessed sections are not joined electrically. Each Kilo Recessed fixture/section requires its own home run to the power supply.


Layout Example

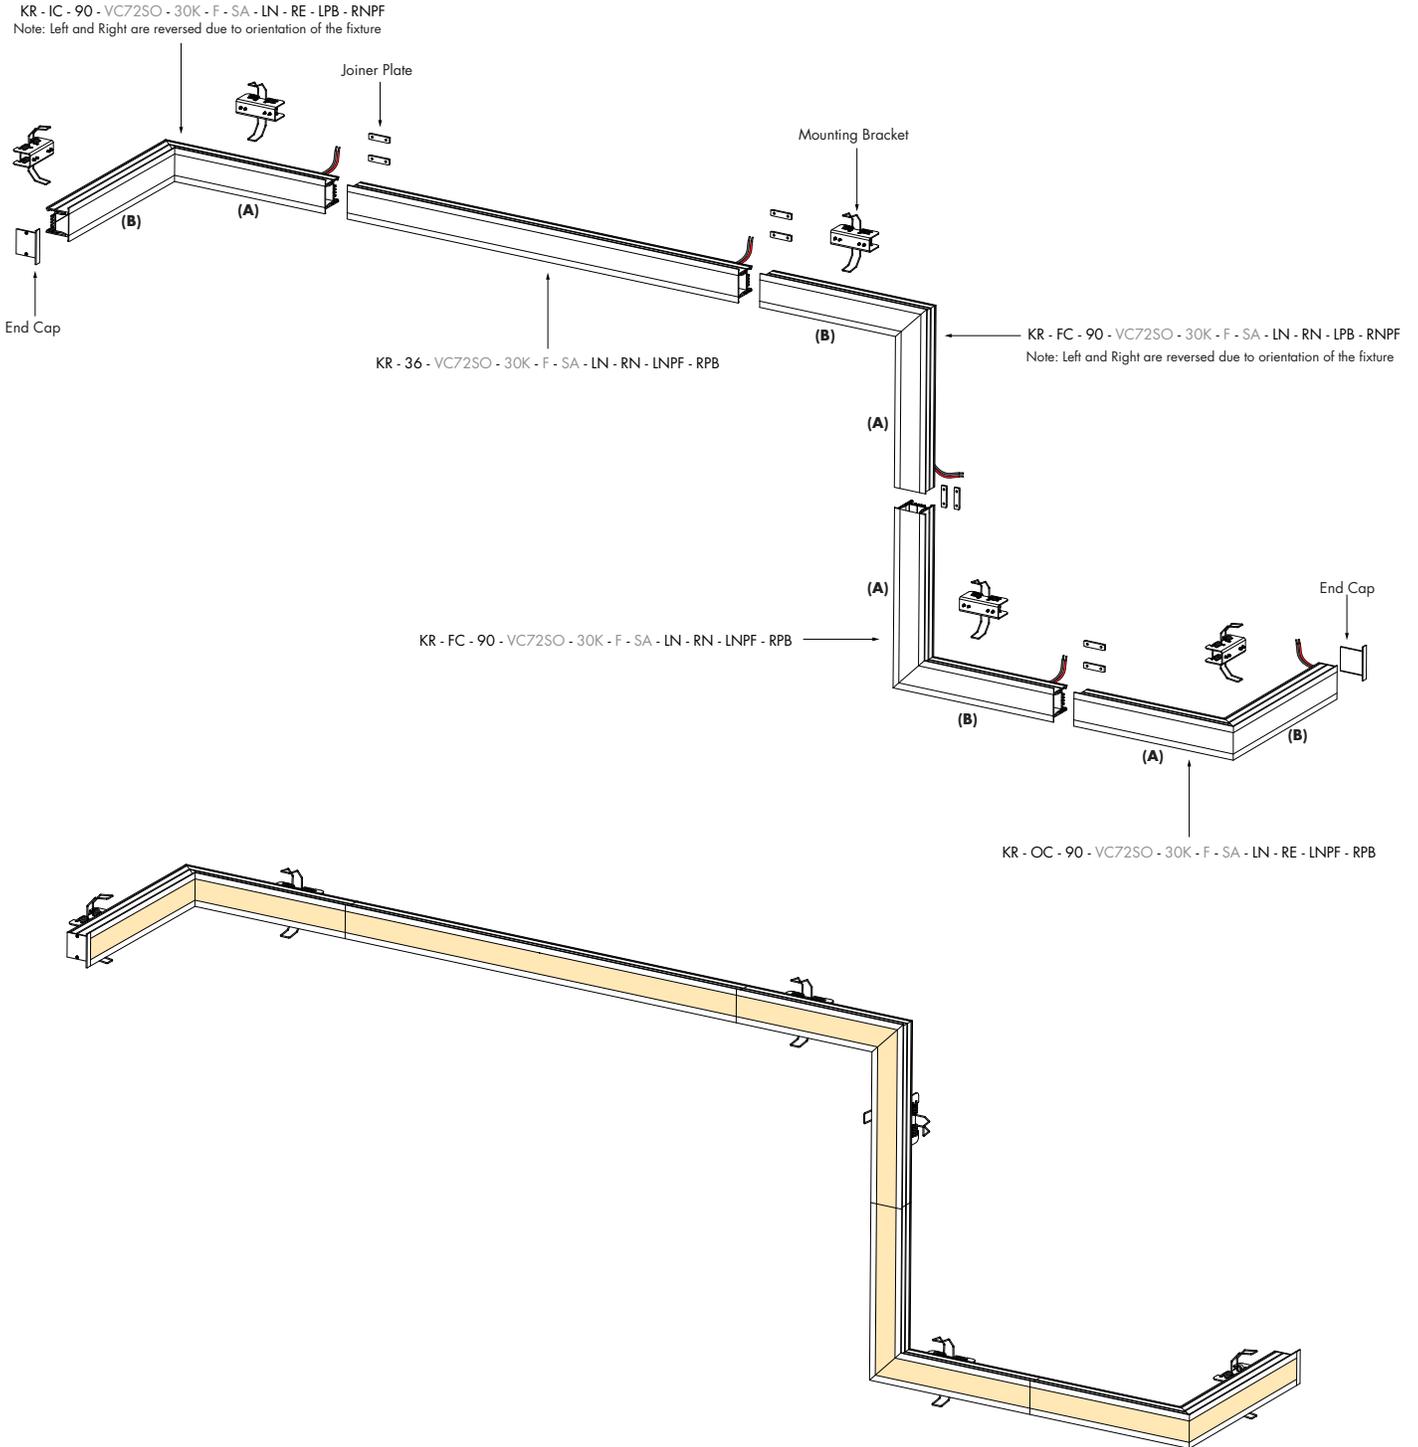

**NOTE:** Kilo Recessed sections are not joined electrically. Each Kilo Recessed section requires its own home run to the power supply.

Light Transmission and Dotting

Output Options	Lens/Accessory							
	Clear Lens				Frosted Lens			
Dimming Level	100%	50%	10%	1%	100%	50%	10%	1%
VC72VLO	CD	CD	CD	CD	ND	ND	ND	ND
VC72LO	CD	CD	CD	CD	ND	ND	ND	ND
VC72SO	CD	CD	CD	CD	ND	ND	ND	ND
VC72MO	CD	CD	CD	CD	ND	ND	ND	ND
VC72HO	CD	CD	CD	CD	ND	ND	ND	ND
VC72VHO	CD	CD	CD	CD	ND	ND	ND	ND
HE64VLO	CD	CD	CD	CD	ND	ND	ND	ND
HE64LO	CD	CD	CD	CD	ND	ND	ND	ND
HE64SO	CD	CD	CD	CD	ND	ND	ND	ND
HE64MO	CD	CD	CD	CD	ND	ND	ND	ND
HE64HO	CD	CD	CD	CD	ND	ND	ND	ND
HE64VHO	CD	CD	CD	CD	ND	ND	ND	ND
<b>Transmission Percentage</b>	114%				100%			

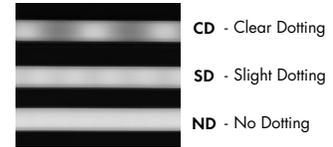


CD - Clear Dotting  
SD - Slight Dotting  
ND - No Dotting

Use complete Dotting Chart Tool online for more dotting information



Accessories

Continuous Lens (Field Cuttable)

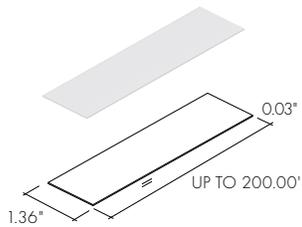


**KILOCF** - Kilo Channel Continuous Frosted Lens  
**KILOCC** - Kilo Channel Continuous Clear Lens

**XX** - Order in 10' increments up to 200'

**Note:** Order the continuous (field cuttable) lens up to 200'. Recommended to avoid seams between multiple fixtures joining together.

**LVSP-4T-BK**


Low Voltage, 4 Terminal Splice Box, Black, IP20

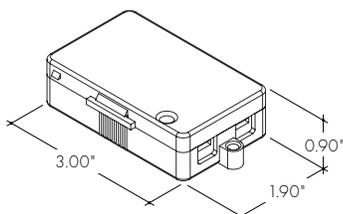

**Photometry**


KR-48-VC72VHO-30K-C

Kilo Recessed, 4ft, VHO, 3000K, Clear Lens

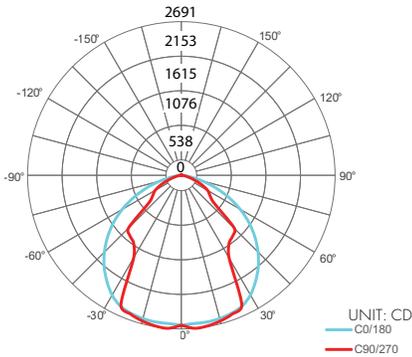


**Zonal Lumen Summary 3000K**

Zone	Lumen	% Fixture
0-30	529	33%
0-40	833	53%
0-60	1349	85%
0-90	1570	99%
0-180	1582	100%



KR-48-VC72VHO-30K-F

Kilo Recessed, 4ft, VHO, 3000K, Frosted Lens

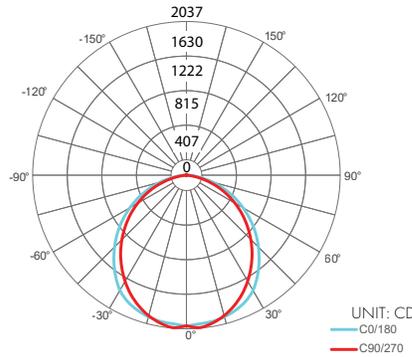

**Zonal Lumen Summary 3000K**

Zone	Lumen	% Fixture
0-30	387	28%
0-40	630	45%
0-60	1102	79%
0-90	1380	99%
0-180	1392	100%



**Power Consumption**

Please visit the link/QR code below to access the Luminii Power Consumption Chart tool on our website.

There you will be able to select your fixture, output, and desired power feed to get a full power consumption table.



I'm also click-able

Desired Nominal Length: \_\_\_\_\_

Desired Output: \_\_\_\_\_

Desired CCT: \_\_\_\_\_

### Voltage Drop Calculator

The below chart assumes nominal voltage of 24 Volts and a Voltage Drop Allowance of 3% through the wire

Wattage [W]	Maximum Wire Length From Power Supply to Start of Run [ft]						
	12 AWG	14 AWG	16 AWG	18 AWG	20 AWG	22 AWG	24 AWG
<b>5</b>	1088.2	684.4	430.3	270.6	170.2	107.1	67.3
<b>10</b>	544.1	342.2	215.1	135.3	85.1	53.5	33.7
<b>15</b>	362.7	228.1	143.4	90.2	56.7	35.7	22.4
<b>20</b>	272.0	171.1	107.6	67.7	42.6	26.8	16.8
<b>25</b>	217.6	136.9	86.1	54.1	34.0	21.4	13.5
<b>30</b>	181.4	114.1	71.7	45.1	28.4	17.8	11.2
<b>35</b>	155.5	97.8	61.5	38.7	24.3	15.3	9.6
<b>40</b>	136.0	85.5	53.8	33.8	21.3	13.4	8.4
<b>45</b>	120.9	76.0	47.8	30.1	18.9	11.9	7.5
<b>50</b>	108.8	68.4	43.0	27.1	17.0	10.7	6.7
<b>55</b>	98.9	62.2	39.1	24.6	15.5	9.7	6.1
<b>60</b>	90.7	57.0	35.9	22.6	14.2	8.9	5.6
<b>65</b>	83.7	52.6	33.1	20.8	13.1	8.2	5.2
<b>70</b>	77.7	48.9	30.7	19.3	12.2	7.6	4.8
<b>75</b>	72.5	45.6	28.7	18.0	11.3	7.1	4.5
<b>80</b>	68.0	42.8	26.9	16.9	10.6	6.7	4.2
<b>85</b>	64.0	40.3	25.3	15.9	10.0	6.3	4.0
<b>90</b>	60.5	38.0	23.9	15.0	9.5	5.9	3.7
<b>96</b>	56.7	35.6	22.4	14.1	8.9	5.6	3.5

## Power Supplies

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

### For use with Static White



#### Ordering Code - Universal Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	WATTAGE	OUTPUT
PS-Power Supply, 120-277VAC	UNI - 0-10V Dimming (0.1%), Phase Dimming (0.1%)	30 - 30 Watts 60 - 60 Watts 96 - 96 Watts 3x96 - 3x96 Watts	24 - 24 VDC

Compatibility: View a complete list of compatible dimmers on the PS-UNI product page.

0-10V - 0.1% dimming  
MLV/ELV/TRIAC - 0.1% dimming, consult dimming compatibility chart

MODELS	PS-UNI-30W	PS-UNI-60W	PS-UNI-96W	PS-UNI-3X96W
<b>Length</b>	6.50"	7.40"	8.66"	11.85"
<b>Width</b>	3.73"	3.73"	3.73"	4.32"
<b>Depth</b>	1.61"	1.61"	1.61"	1.81"

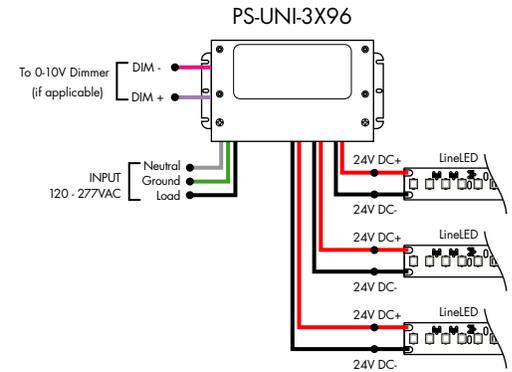
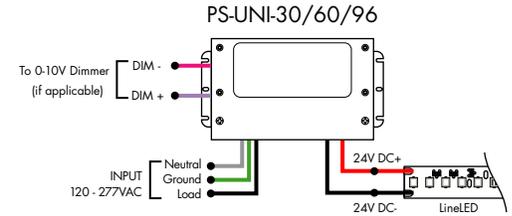


### For use with Static White

#### Ordering Code - 0-10V Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS-Power Supply, 120-277VAC	010V-LIN - 0-10V Dimming (0.1%), Linear 010V-LOG - 0-10V Dimming (0.1%), Logarithmic	D-Dry	96 - 96 Watts 3x96 - 3x96 Watts	24 - 24 VDC

MODELS	96W	3X96
<b>Length</b>	14.40"	15.00"
<b>Width</b>	5.20"	6.62"
<b>Depth</b>	2.60"	4.45"

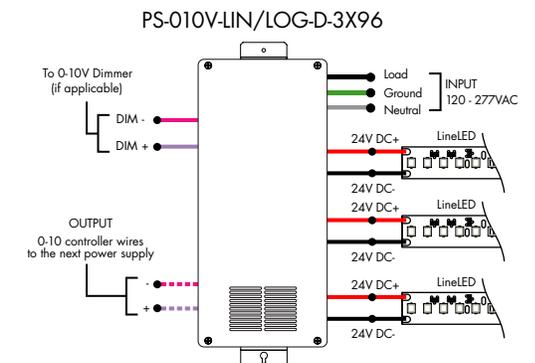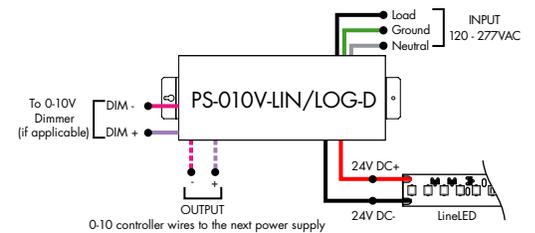


**Power Supplies**

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

**For use with Static White**

**Ordering Code - Athena 0-10V LED Driver**

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT	FEATURE
PS-Power Supply, 120-277VAC	010V-LIN - 0-10V Dimming (0.1%), Linear 010V-LOG - 0-10V Dimming (0.1%), Logarithmic	D-Dry	96-96 Watts	24 - 24 VDC	AWN-R-Athena

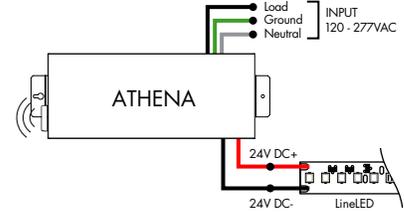


MODELS	96W
<b>Length</b>	14.40"
<b>Width</b>	5.20"
<b>Depth</b>	2.60"

**For use with Static White**

**Ordering Code - DALI 2 Dimming Power Supplies 0.1% 120VAC - 277VAC**

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS-Power Supply, 120-277VAC	DALI2-DT6 - DALI2 DT6 (0.1%)	D-Dry	96-96 Watts	24 - 24 VDC

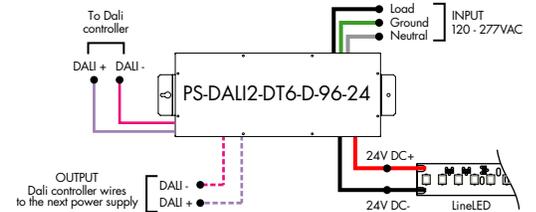


Model	96W
<b>Length</b>	14.40"
<b>Width</b>	5.20"
<b>Depth</b>	2.60"


**For use with Static White**

**Ordering Code - DALI Dimming Power Supplies 0.1% 120VAC - 277VAC**

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS-Power Supply, 120-277VAC	DALI-DALI (0.1%)	D-Dry	96-96 Watts 3x96-3x96 Watts	24 - 24 VDC

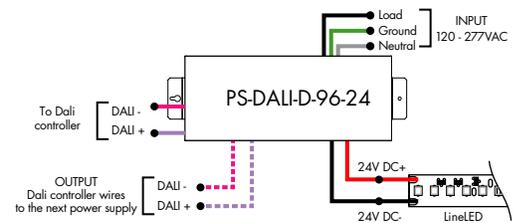

Model	96W	3X96
<b>Length</b>	14.40"	15.00"
<b>Width</b>	5.20"	6.62"
<b>Depth</b>	2.60"	4.56"

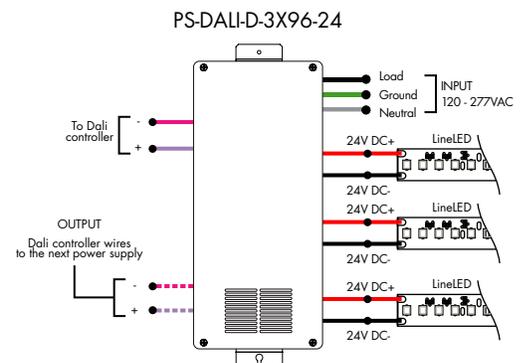

## Power Supplies

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.



### For use with Static White

#### Ordering Code - DMX Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS-Power Supply, 120-277VAC	DMX-DMX (0.1%)	D-Dry	96-96 Watts 3x96-3x96 Watts	24-24 VDC

MODELS	96W	3X96
Length	14.40"	15.00"
Width	5.20"	6.62"
Depth	2.60"	4.56"

ZONAL CONTROL POWER SUPPLIES.  
CONTROL MULTIPLE TAPES/ZONES USING DMX CHANNELS.

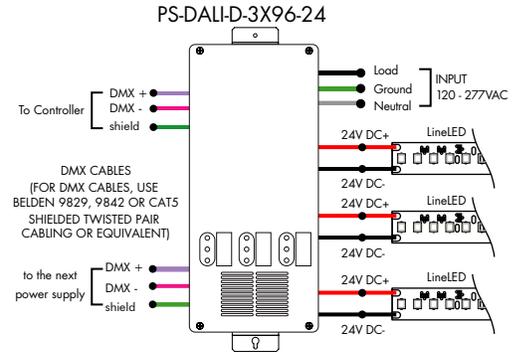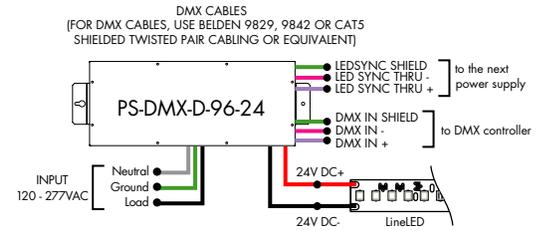


### For use with Static White

#### Ordering Code - Non-Dimming Power Supply, 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS-Power Supply, 120-277VAC	ND-Non Dimming	D-Dry	96-96 Watts	24-24 VDC

MODELS	96W
Length	14.40"
Width	5.20"
Depth	2.60"

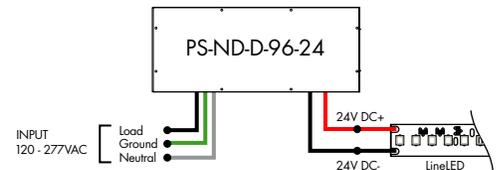


### For use with Static White

#### Ordering Code - In-Ground Power Supplies

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS120-Power Supply, 120VAC PS240-Power Supply, 240VAC PS277-Power Supply, 277VAC	ELV-ELV Dimming (1%)	IG-In Ground	2X96-2X96 Watts	24-24 VDC

MODELS	2X96W
Length	8.40"
Width	8.30"
Depth	8.10"

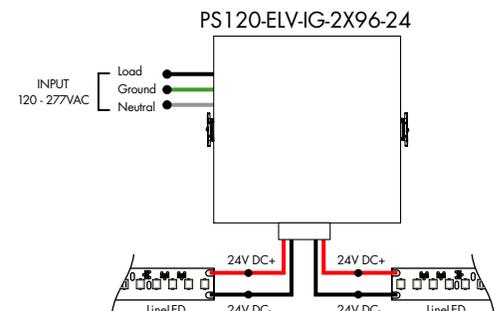

**Power Supplies**

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.



Luminii is a Lutron OEM Advantage Partner


**Lutron Power Supplies 1%**

MODEL

**L3DA4U1UKL-CV240**

HiLume™ 1% EcoSystem Voltage LED driver 40W max

MODELS	L3DA4U1UKL-CV240
<b>Length</b>	4.98"
<b>Width</b>	4.00"
<b>Depth</b>	2.62"

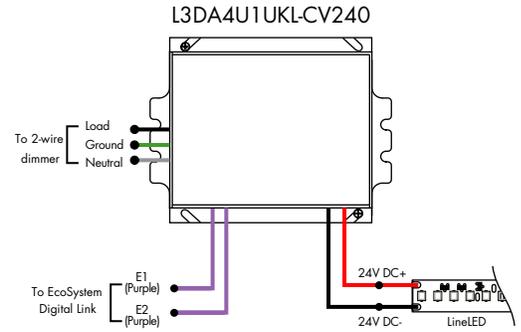

Luminii is a Lutron OEM Advantage Partner

**Lutron Power Supplies 0.1%**

MODEL

**L3D0-96W24V-U**

HiLume™ 0.1% EcoSystem Voltage LED Driver with Soft-On, Fade-to-Black™ 96W max

MODELS	L3D0
<b>Length</b>	10.50"
<b>Width</b>	5.50"
<b>Depth</b>	2.00"

