
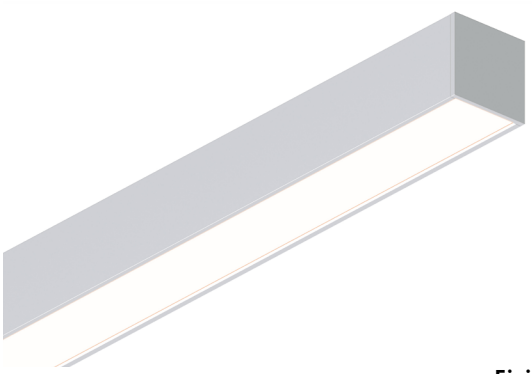


Features

- 24VDC Class 2 fixtures made to order up to 144". Fixtures can be linked together to form one continuous run
- Suitable surface mount, direct view, and architectural reveal applications
- Suitable for installation in the storage area of a clothes closet on outputs 5.7W/ft or less, NEC compliant for the USA only.
- Class 2 listed for damp locations
- Dot free even illumination with frosted lens
- Proprietary strong bond solder method handles up to 50 lbs of pull force on wire leads and connectors
- Vibrant Color options offer premium quality and with R9 values up to 98
- High Efficacy options offer best in class output and efficacy with over 1710 lm/ft and up to 121 lm/W
- Average Life (L70): 50,000hrs
- 7 year warranty



Finish Options (see page 4 for additional information)

Base	Silver Anodized				
Powder Coat	Black	Bronze	White		
Premium	Matte Black	Warm Nickel	Aged Brass	Polished Gold	Chrome

Technical Information

TYPE	Vibrant Color VC72					
OUTPUT OPTIONS	**2x VC72VLO**	**2x VC72LO**	**2x VC72SO**	**2x VC72MO**	**2x VC72HO**	**2x VC72VHO**
Lumens Output (3000K) (with a Frosted Lens)	193 lm/ft	491 lm/ft	654 lm/ft	864 lm/ft	1045 lm/ft	1392 lm/ft
Average Power Consumption (for a 4' section)	2.2 W/ft	5.6 W/ft	7.4 W/ft	9.8 W/ft	11.8 W/ft	15.8 W/ft
Efficacy	88 lm/W	88 lm/W	88 lm/W	88 lm/W	89 lm/W	88 lm/W
Max Run Length (individual fixture)	12 ft	12 ft	12 ft	12 ft	10.5 ft	9 ft
Ambient Operating Temperature Range*	-4°F – 122°F (-20°C – 50°C)					-4°F – 104°F (-20°C – 40°C)

*Ambient Operating Temperature Range to maintain L70 of 50k+ hours in normal mounting conditions for the fixture. Exceeding Ambient Operating Temperature Range may result in decreased life/output. Consult Technical Support for specific inquiries.

Vibrant Color (VC72)

CCT	Multiplier (ref. - 30K)	TM-30 CRI	TM-30 R_f	TM-30 R_g	TM-30 R_9
1800K	0.50	95	94	99	86
2200K	0.66	96	94	101	95
2400K	0.90	98	96	101	91
2700K	0.93	98	96	102	93
3000K	1.00	97	94	104	99
3500K	1.04	96	94	105	97
4100K	1.05	97	95	104	96

TYPE	High Efficacy HE64					
OUTPUT OPTIONS	**2x HE64VLO**	**2x HE64LO**	**2x HE64SO**	**2x HE64MO**	**2x HE64HO**	**2x HE64VHO**
Lumens Output (3000K) (with a Frosted Lens)	214 lm/ft	461 lm/ft	661 lm/ft	879 lm/ft	1249 lm/ft	1713 lm/ft
Average Power Consumption (for a 4' section)	2 W/ ft	3.8 W/ ft	5.8 W/ ft	7.6 W/ ft	11.2 W/ ft	14.2 W/ ft
Efficacy	107 lm/W	121 lm/W	114 lm/W	116 lm/W	112 lm/W	121 lm/W
Max Run Length (individual fixture)	12 ft	12 ft	12 ft	12 ft	8.5 ft	6.5 ft
Ambient Operating Temperature Range*	-4°F – 122°F (-20°C – 50°C)					

*Ambient Operating Temperature Range to maintain L70 of 50k+ hours in normal mounting conditions for the fixture. Exceeding Ambient Operating Temperature Range may result in decreased life/output. Consult Technical Support for specific inquiries.

High Efficacy (HE64)

CCT	Multiplier (ref. - 30K)	TM-30 CRI	TM-30 R_f	TM-30 R_g	TM-30 R_9
2200K	0.74	94	91	96	65
2400K	0.87	94	92	97	56
2700K	0.97	94	92	100	57
3000K	1.00	93	91	99	54
3500K	1.01	95	91	99	62
4000K	1.04	95	91	99	68

Ordering Code

MODEL - LENGTH[1] - OUTPUT[2] - CCT - LENS[3] - MOUNTING - LEFT END CAP[6] - LEFT END CAP[6] - RIGHT END CAP[6] - POWER FEED LEFT END[7] - POWER FEED RIGHT END[7]

MODEL
- K - Kilo

LENGTH[1]
- 12"–144" 1" increments
- 12"–144" 2" increments

OUTPUT[2]
- VC72VLO - Very Low
- VC72LO - Low
- VC72SO - Standard
- VC72MO - Medium
- VC72HO - High
- VC72VHO - Very High
- HE64VLO - Very Low
- HE64LO - Low
- HE64SO - Standard
- HE64MO - Medium
- HE64HO - High
- HE64VHO - Very High

CCT
- 18K - 1800K
- 22K - 2200K
- 24K - 2400K
- 27K - 2700K
- 30K - 3000K
- 35K - 3500K
- 41K - 4100K
- 22K - 2200K
- 24K - 2400K
- 27K - 2700K
- 30K - 3000K
- 35K - 3500K
- 40K - 4000K

LENS[3]
- F - Frosted
- C - Clear
- N - No Lens

MOUNTING
- CB - Concealed Bracket
- A - Adjustable Hinge Bracket, up to 90°[6]

LEFT END CAP[6]

BASE
- SA - Silver Anodized

POWDER COAT
- BK - Black
- BZ - Bronze
- WH - White

PREMIUM
- MBK - Matte Black
- WN - Warm Nickel
- AB - Aged Brass
- PG - Polished Gold[5]
- CH - Chrome[5]

LEFT END CAP[6]
- LE - Endcap Left End
- LN - No Endcap Left End

RIGHT END CAP[6]
- RE - Endcap Right End
- RN - No Endcap Right End


POWER FEED LEFT END[7]
- LWE - End Wire Leads
- LFE - End Female Q/C
- LWB - Back Wire Leads
- LFB - Back Female Q/C
- LNPF - No Power Feed

POWER FEED RIGHT END[7]
- RNPF - No Power Feed
- RWE - End Wire Leads
- RFE - End Female Q/C
- RWB - Back Wire Leads
- RFB - Back Female Q/C


1 - Custom lengths and increments are available, please consult Inside Sales with specific request.
2 - Title 24 JA8 achievable depending on Output, CCT, and Lens selections. See multiplier charts to calculate specific efficacies.
3 - Continuous Lens may be ordered separately for multi-fixture runs to create an even, seamless appearance.
4 - Non Base finishes may have extended lead times. Custom RALs are available, please consult Inside Sales with specific request.
5 - Polished Gold finishes and Chrome finishes have a maximum fixture length of 96".
6 - End caps will have a hole for the wire feed if End Wire Leads are chosen for Power Feed.
7 - Wire leads are 72" long.
8 - NOTE: Each Kilo Surface fixture/section requires it's own home run to a power supply. They cannot be electrically connected together

Kilo Surface Corner Options


K-FC
Flat Corner

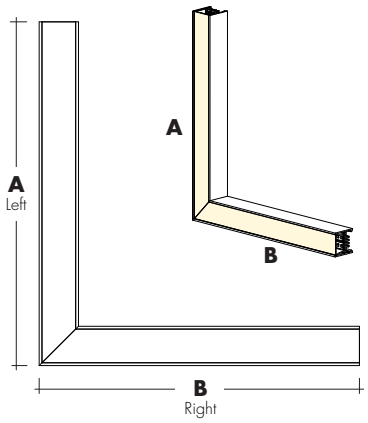

K-IC
Inner Corner

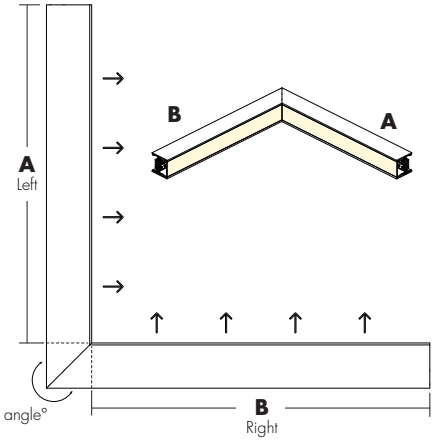

K-OC
Outside Corner

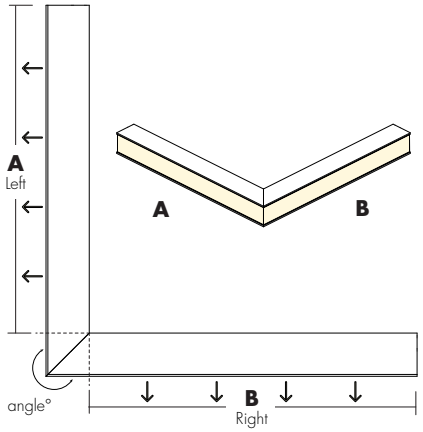

Vibrant Color	Actual Length		Total Wattage					
Corner Type	**A**	**B**	**2x VC72VLO**	**2x VC72LO**	**2x VC72SO**	**2x VC72MO**	**2x VC72HO**	**2x VC72VHO**
Flat (K-FC)	12 5/16	13 5/16	4.3	11.4	14.8	19.8	25.4	32.0
Inner (K-IC)	12 12/16	12 12/16	4.3	11.4	14.8	19.8	25.4	32.0
Outer (K-OC)	11 8/16	11 8/16	4.3	11.4	14.8	19.8	25.4	32.0

High Efficacy	Actual Length		Total Wattage					
Corner Type	**A**	**B**	**2x HE64VLO**	**2x HE64LO**	**2x HE64SO**	**2x HE64MO**	**2x HE64HO**	**2x HE64VHO**
Flat (K-FC)	12 10/16	13 10/16	4.0	7.8	11.9	16.3	23.5	29.6
Inner (K-IC)	13 1/16	13 1/16	4.0	7.8	11.9	16.3	23.5	29.6
Outer (K-OC)	11 13/16	11 13/16	4.0	7.8	11.9	16.3	23.5	29.6


Ordering Code

MODEL	CORNER	ANGLE[1]	OUTPUT[2]	CCT	LENS[3]	MOUNTING	FINISH[4]	LEFT END CAP[6] (A)	RIGHT END CAP[6] (B)	POWER FEED LEFT END[7]	POWER FEED RIGHT END[7]
K - Kilo	IC - Inside Corner OC - Outside Corner FC - Flat Corner	90 - 90° C - Custom Angle Corner[1]	VC72VLO - Very Low VC72LO - Low VC72SO - Standard VC72MO - Medium VC72HO - High VC72VHO - Very High	18K - 1800K 22K - 2200K 24K - 2400K 27K - 2700K 30K - 3000K 35K - 3500K 41K - 4100K	F - Frosted C - Clear N - None	CB - Concealed Bracket	*BASE* SA - Silver Anodized *POWDER COAT* BK - Black BZ - Bronze WH - White	LE - Endcap Left End LN - No Endcap Left End	RE - Endcap Right End RN - No Endcap Right End	LWE - End Wire Leads LFE - End Female Q/C LWB - Back Wire Leads LFB - Back Female Q/C	RNPF - No Power Feed
			HE48VLO - Very Low HE48LO - Low HE48SO - Standard HE48MO - Medium HE48HO - High HE64VHO - Very High	22K - 2200K 24K - 2400K 27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K			*PREMIUM* MBK - Matte Black WN - Warm Nickel AB - Aged Brass PG - Polished Gold[5] CH - Chrome[5]	LE - Endcap Left End LN - No Endcap Left End	RE - Endcap Right End RN - No Endcap Right End	LNPF - No Power Feed LWE - End Wire Leads LFE - End Female Q/C RWB - Back Wire Leads RFB - Back Female Q/C	


1 - Custom Angle Corners are available, please consult Inside Sales with specific request.
2 - Title 24 JA8 achievable depending on Output, CCT, and Lens selections. See multiplier charts to calculate specific efficacies.
3 - Continuous Lens may be ordered separately for multi-fixture runs to create an even, seamless appearance.
4 - Non Base finishes may have extended lead times. Custom RALs are available, please consult Inside Sales with specific request.
5 - Polished Gold finishes and Chrome finishes have a maximum fixture length of 96".
6 - End caps will have a hole for the wire feed if End Wire Leads are chosen for Power Feed.
7 - Wire leads are 72" long.
8 - NOTE: Each Kilo Surface fixture/section requires it's own home run to a power supply. They cannot be electrically connected together

Powerfeed options for Continuous Run Straight Fixtures


START FIXTURE (LEFT ENDCAP)
Wire leads/Female Q/C on Left End of Fixture




MIDDLE FIXTURE (NO ENDCAPS)
Wire leads/Female Q/C on Left or Right Back of Fixture

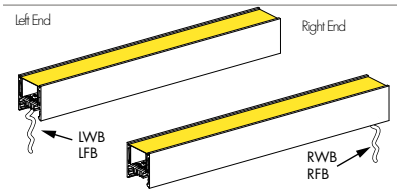


END FIXTURE (RIGHT ENDCAP)
Wire leads/Female Q/C on Right End of Fixture



START FIXTURE (LEFT ENDCAP)
Wire leads/Female Q/C on Left or Right Back of Fixture

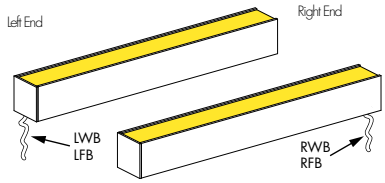


END FIXTURE (RIGHT ENDCAP)
Wire leads/Female Q/C on Left/Right Back of Fixture

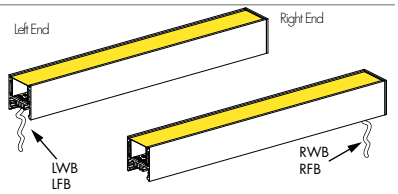


Powerfeed options for Single Straight Fixtures

SINGLE FIXTURE (TWO ENDCAPS)
Wire leads/Female Q/C on Left or Right End of Fixture

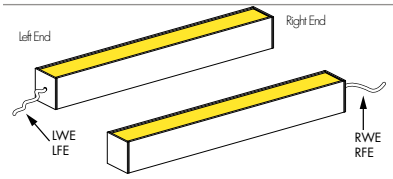


SINGLE FIXTURE (TWO ENDCAPS)
Wire leads/Female Q/C on Left or Right Back of Fixture

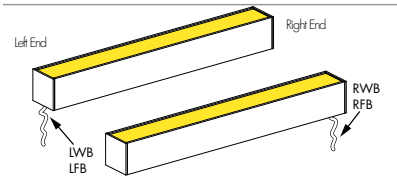


Powerfeed options for Corner Fixtures

KR-FC-90-XX-LNPF-RXX
Wire Leads or Female Quick Connect on Power Feed Right End/Back of Flat Corner

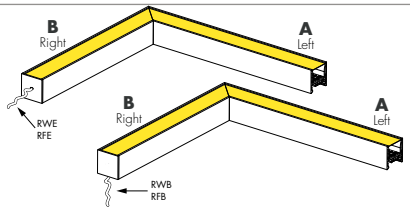


Note: Back Wire Feed also available on Power Feed Left End (A), but not shown

KR-FC-90-XX-LXX-RNPF
Wire Leads or Female Quick Connect on Power Feed Left End/Back of Flat Corner

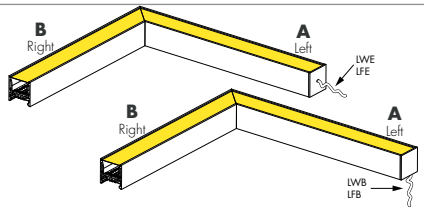


Note: Back Wire Feed also available on Power Feed Right End (B), but not shown

KR-IC-90-XX-LNPF-RXX
Wire Leads or Female Quick Connect on Power Feed Right End/Back of Inside Corner

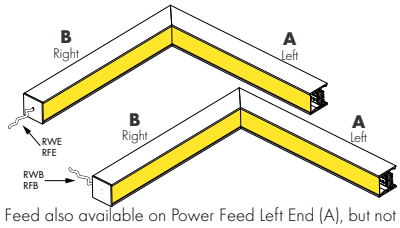


Note: Back Wire Feed also available on Power Feed Left End (A), but not shown

KR-IC-90-XX-LXX-RNPF
Wire Leads or Female Quick Connect on Power Feed Left End/Back of Inside Corner

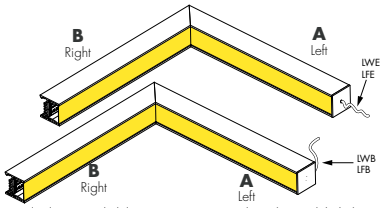


Note: Back Wire Feed also available on Power Feed Right End (B), but not shown

KR-OC-90-XX-LNPF-RXX
Wire Leads or Female Quick Connect on Power Feed Right End/Back of Outside Corner

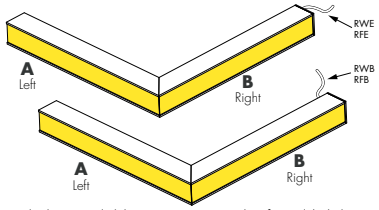


Note: Back Wire Feed also available on Power Feed Left End (A), but not shown

KR-OC-90-XX-LXX-RNPF
Wire Leads or Female Quick Connect on Power Feed Left End/Back of Outside Corner

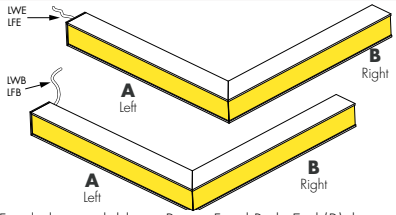

Note: Back Wire Feed also available on Power Feed Right End (B), but not shown

Product Dimensions

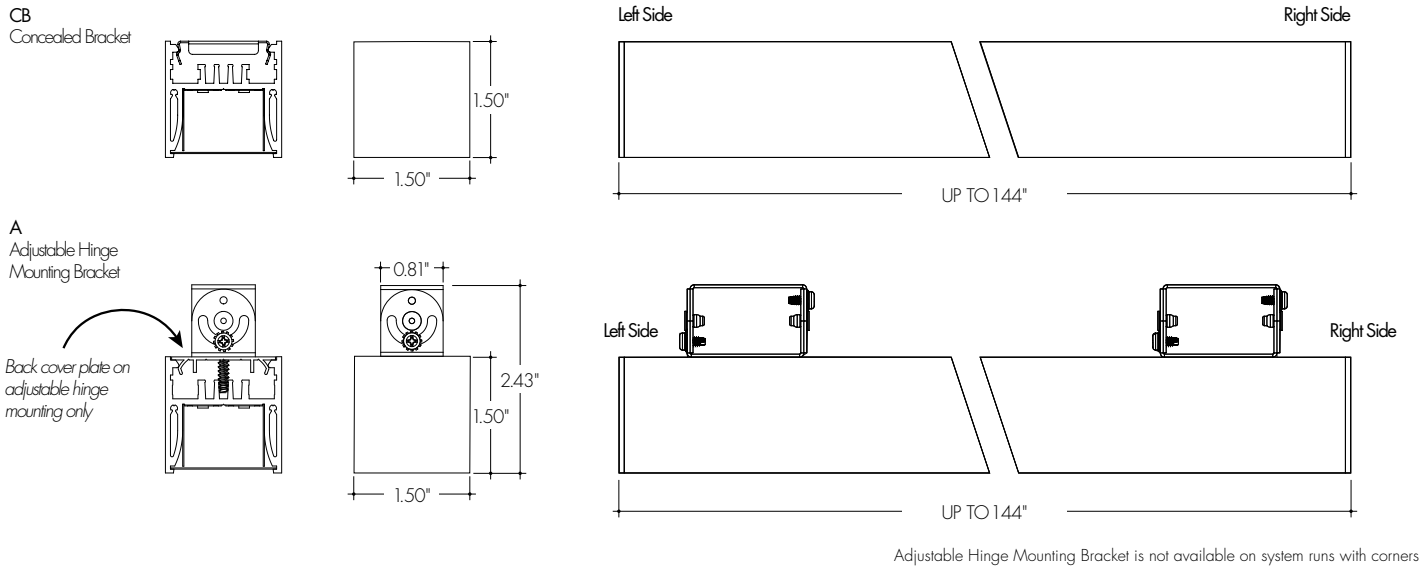


Adjustable Hinge Mounting Bracket is not available on system runs with corners

Finish Options


- Finish options are available in a wide variety, allowing for complete customization of style and aesthetic.
- Non Base finishes may have extended lead times and price adder.
- Polished Gold and Chrome finishes have a maximum fixture length of 96".
- Custom RALs are available, please consult Inside Sales with specific request.

Silver Anodized
Base




Silver Anodized is a soft silver with a clear finish.

Black
Powder Coat




Black is a true deep black with a glossy finish.

Bronze
Powder Coat




Bronze is a rich, dark brown with a satin finish.

White
Powder Coat




White is a polar bright white and field paintable.

Matte Black
Premium




Matte Black is a dark, pitch-black with a soft flat finish.

Warm Nickel
Premium




Warm Nickel is a soft, silvery smoke with warm tones and a satin finish.

Aged Brass
Premium




Aged Brass is a deep brown shade with slightly golden undertones.

Polished Gold
Premium



Polished Gold is bright and radiant for a brilliant finish.


Chrome
Premium



Chrome is a highly reflective silver polish.

Accessory Options

Continuous Lens (Field Cuttable)




KILOC-FF - Kilo Channel Continuous Frosted Lens
KILOC-CC - Kilo Channel Continuous Clear Lens

XX - Order in 10' increments up to 200'

Note: Order the continuous (field cuttable) lens up to 200'. Recommended to avoid seams between multiple fixtures joining together.

LVSP-4T-BK
Low Voltage, 4 Terminal Splice Box, Black, IP20




Sample Layout of Power Feed


K-XX-LE-RN-LWE-RNPF
End cap left end, no end cap right end of Fixture
Wire leads on the left end of Fixture

K-XX-LN-RN-LWB-RNPF
No end cap on left or right end of Fixture
Wire leads on the left backside of Fixture

K-XX-LN-RE-LNPF-RFB
No end cap left end, end cap right end of Fixture
Female Q/C on the right backside of Fixture

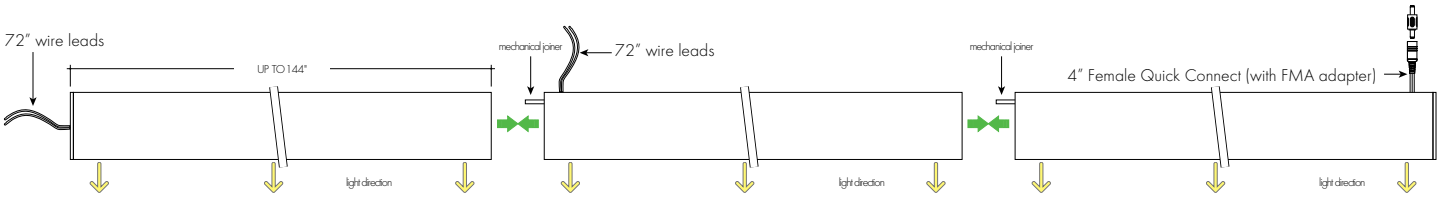

NOTE: Kilo Surface sections are not joined electrically. Each Kilo Surface section requires its own home run to the power supply. Mechanical joiners are included for every missing LEFT end cap (LN)

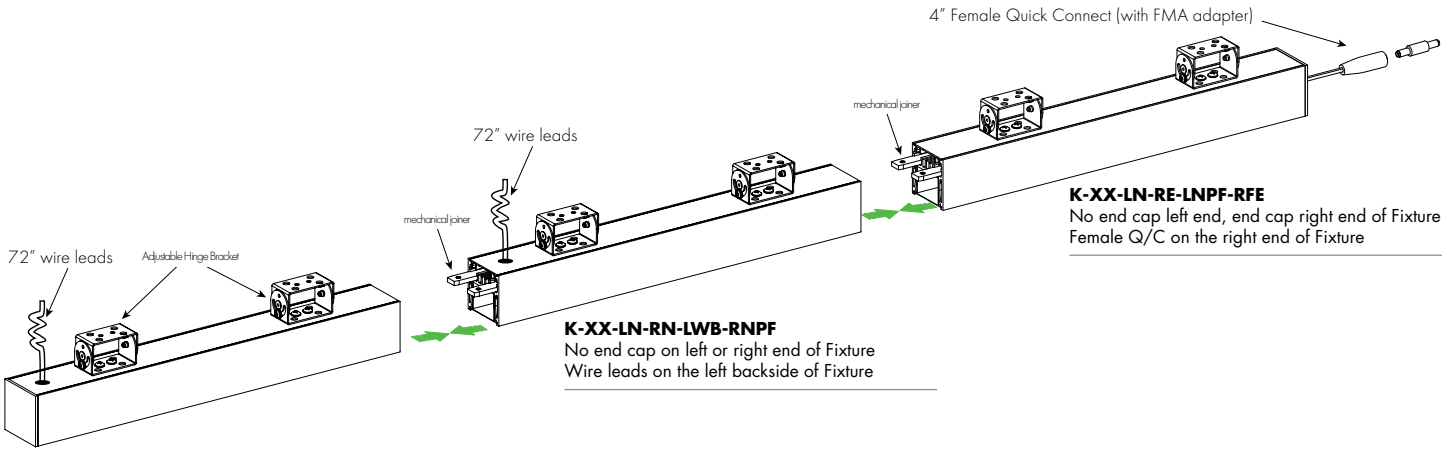


K-XX-LN-RE-LNPF-RFE
No end cap left end, end cap right end of Fixture
Female Q/C on the right end of Fixture

K-XX-LN-RN-LWB-RNPF
No end cap on left or right end of Fixture
Wire leads on the left backside of Fixture

K-XX-LE-RN-LWB-RNPF
End cap left end, no end cap right end of Fixture
Wire leads on the left backside of Fixture

NOTE: Kilo Surface sections are not joined electrically. Each Kilo Surface section requires its own home run to the power supply. Adjustable hinge mounting brackets are not compatible with corners, or system runs that have corner sections in them.

Layout Example

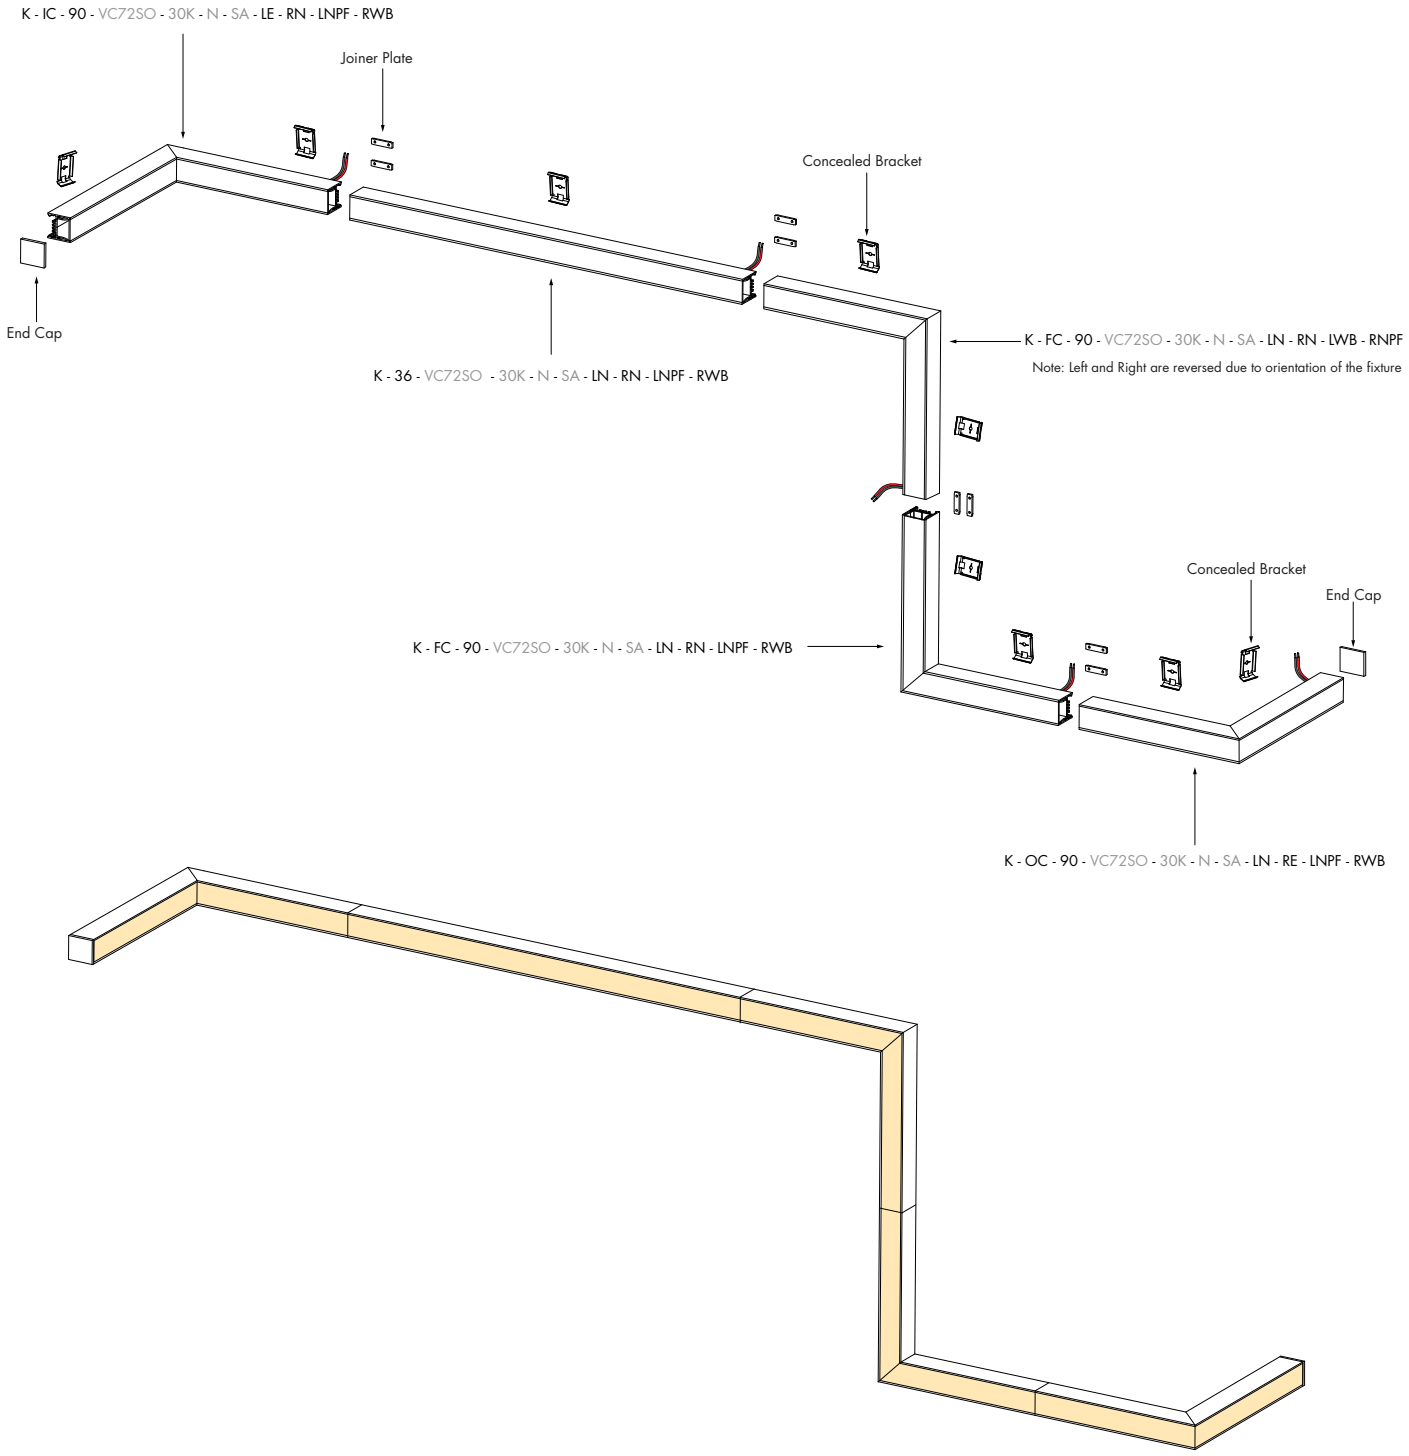

Light Transmission and Dotting

	Lens/Accessory							
Output Options	**Clear Lens**				**Frosted Lens**			
Dimming Level	100%	50%	10%	1%	100%	50%	10%	1%
VC72VLO	CD	CD	CD	CD	ND	ND	ND	ND
VC72LO	CD	CD	CD	CD	ND	ND	ND	ND
VC72SO	CD	CD	CD	CD	ND	ND	ND	ND
VC72MO	CD	CD	CD	CD	ND	ND	ND	ND
VC72HO	CD	CD	CD	CD	ND	ND	ND	ND
VC72VHO	CD	CD	CD	CD	ND	ND	ND	ND
HE64VLO	CD	CD	CD	CD	ND	ND	ND	ND
HE64LO	CD	CD	CD	CD	ND	ND	ND	ND
HE64SO	CD	CD	CD	CD	ND	ND	ND	ND
HE64MO	CD	CD	CD	CD	ND	ND	ND	ND
HE64HO	CD	CD	CD	CD	ND	ND	ND	ND
HE64VHO	CD	CD	CD	CD	ND	ND	ND	ND
Transmission Percentage	114%				100%			



CD - Clear Dotting

SD - Slight Dotting

ND - No Dotting


Use complete Dotting Chart Tool online for more dotting information

I'm also click-able

Photometry

K-48-VC72VHO-30K-C

Kilo, 4ft, VHO, 3000K, Clear Lens

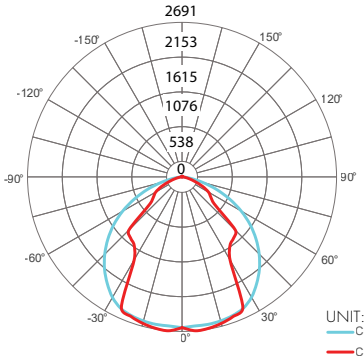

Zonal Lumen Summary 3000K


	Zone	Lumen	% Fixture
	0-30	529	33%
	0-40	833	53%
	0-60	1349	85%
	0-90	1570	99%
Total	0-180	1582	100%

Beam Angle

83°

K-48-VC72VHO-30K-F

Kilo, 4ft, VHO, 3000K, Frosted Lens

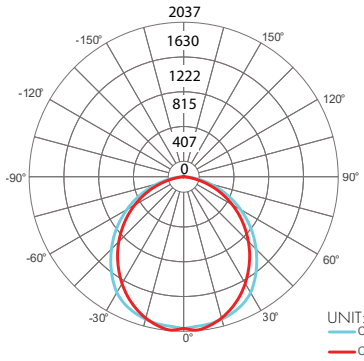

Zonal Lumen Summary 3000K

	Zone	Lumen	% Fixture
	0-30	387	28%
	0-40	630	45%
	0-60	1102	79%
	0-90	1380	99%
Total	0-180	1392	100%

Beam Angle

103°

Power Consumption

Please visit the link/QR code below to access the Luminii Power Consumption Chart tool on our website.

There you will be able to select your fixture, ouput, and desired power feed to get a full power consumption table.

I'm also click-able

Desired Nominal Length: _____

Desired Output: _____

Desired CCT: _____

Voltage Drop Calculator

The below chart assumes nominal voltage of 24 Volts and a Voltage Drop Allowance of 3% through the wire

Wattage [W]	Wire Length From Power Supply to Start of Run [ft]						
	12 AWG	14 AWG	16 AWG	18 AWG	20 AWG	22 AWG	24 AWG
5	1088.2	684.4	430.3	270.6	170.2	107.1	67.3
10	544.1	342.2	215.1	135.3	85.1	53.5	33.7
15	362.7	228.1	143.4	90.2	56.7	35.7	22.4
20	272.0	171.1	107.6	67.7	42.6	26.8	16.8
25	217.6	136.9	86.1	54.1	34.0	21.4	13.5
30	181.4	114.1	71.7	45.1	28.4	17.8	11.2
35	155.5	97.8	61.5	38.7	24.3	15.3	9.6
40	136.0	85.5	53.8	33.8	21.3	13.4	8.4
45	120.9	76.0	47.8	30.1	18.9	11.9	7.5
50	108.8	68.4	43.0	27.1	17.0	10.7	6.7
55	98.9	62.2	39.1	24.6	15.5	9.7	6.1
60	90.7	57.0	35.9	22.6	14.2	8.9	5.6
65	83.7	52.6	33.1	20.8	13.1	8.2	5.2
70	77.7	48.9	30.7	19.3	12.2	7.6	4.8
75	72.5	45.6	28.7	18.0	11.3	7.1	4.5
80	68.0	42.8	26.9	16.9	10.6	6.7	4.2
85	64.0	40.3	25.3	15.9	10.0	6.3	4.0
90	60.5	38.0	23.9	15.0	9.5	5.9	3.7
96	56.7	35.6	22.4	14.1	8.9	5.6	3.5

Power Supplies

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

For use with Static White

Ordering Code - Universal Dimming Power Supplies 0.1% 120VAC - 277VAC


MODEL		INPUT CONTROL		WATTAGE		OUTPUT
	–		–		–	
PS - Power Supply, 120-277VAC		UNI - 0-10V Dimming (0.1%), Phase Dimming (0.1%)		30 - 30 Watts 60 - 60 Watts 96 - 96 Watts 3x96 - 3x96 Watts		24 - 24 VDC

Compatibility: View a complete list of compatible dimmers on the PS-UNI product page.


0-10V - 0.1% dimming
MLV/ELV/TRIAC - 0.1% dimming, consult dimming compatibility chart

MODELS	PS-UNI-30W	PS-UNI-60W	PS-UNI-96W	PS-UNI-3X96W
Length	6.50″	7.40″	8.66"	11.85"
Width	3.73″	3.73″	3.73"	4.32"
Depth	1.61″	1.61″	1.61"	1.81"

PS-UNI-30/60/96

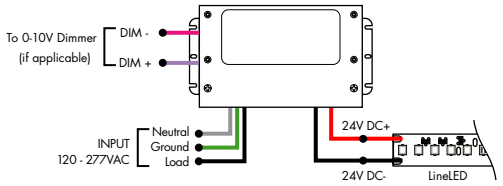

PS-UNI-3X96

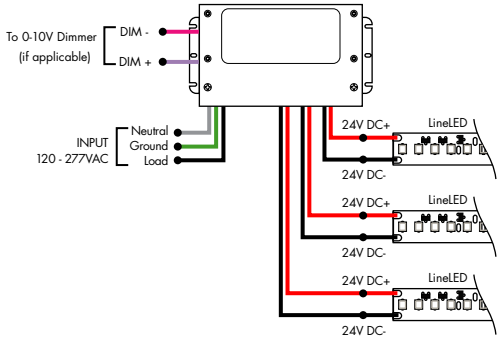


For use with Static White


Ordering Code - 0-10V Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL		INPUT CONTROL		ENVIRONMENT		WATTAGE		OUTPUT
	-		-		-		-	
PS - Power Supply, 120-277VAC		010V-LIN - 0-10V Dimming (0.1%), Linear 010V-LOG - 0-10V Dimming (0.1%), Logarithmic		D - Dry		96 - 96 Watts 3x96 - 3x96 Watts		24 - 24 VDC

MODELS	96W	3X96
Length	14.40"	15.00"
Width	5.20"	6.62"
Depth	2.60"	4.45"

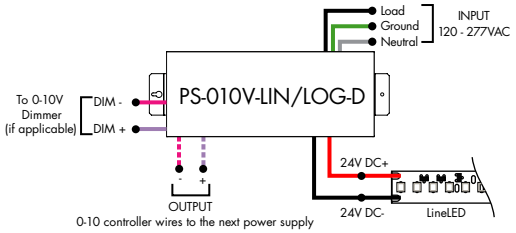

PS-010V-LIN/LOG-D-3X96

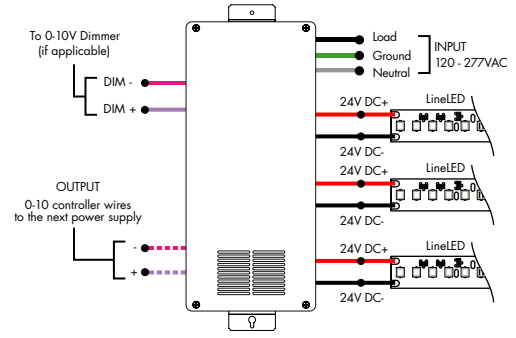

Power Supplies

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.


For use with Static White

Ordering Code - Athena 0-10V LED Driver

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT	FEATURE
PS - Power Supply, 120-277VAC	010V-LIN - 0-10V Dimming (0.1%), Linear 010V-LOG - 0-10V Dimming (0.1%), Logarithmic	D - Dry	96 - 96 Watts	24 - 24 VDC	AWNR - Athena Wireless Node

MODELS	96W
Length	14.40"
Width	5.20"
Depth	2.60"

PS-010V-LIN/LOG-D-96-ANWR

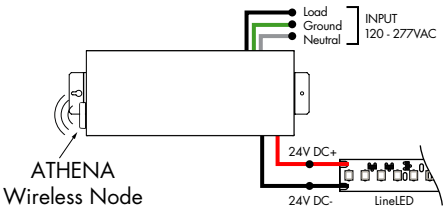


For use with Static White

Ordering Code - DALI 2 Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS - Power Supply, 120-277VAC	DALI2-DT6 - DALI2 DT6 (0.1%)	D - Dry	96 - 96 Watts	24 - 24 VDC

Model	96W
Length	14.40"
Width	5.20"
Depth	2.60"

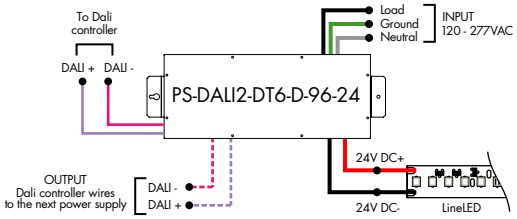


For use with Static White


Ordering Code - DALI Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS - Power Supply, 120-277VAC	DALI - DALI (0.1%)	D - Dry	96 - 96 Watts 3x96 - 3x96 Watts	24 - 24 VDC

Model	96W	3X96
Length	14.40"	15.00"
Width	5.20"	6.62"
Depth	2.60"	4.56"

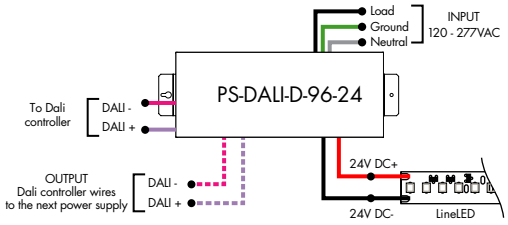

PS-DALI-D-3X96-24

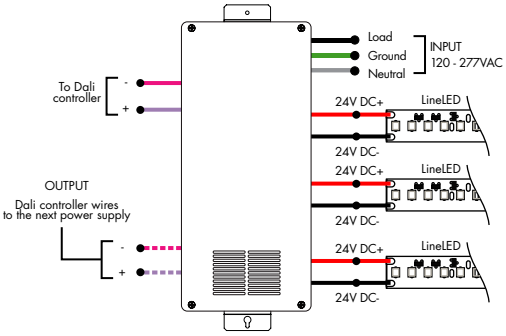

*LUMINII RESERVES THE RIGHTS TO CHANGE SPECIFICATION & INSTRUCTION WITHOUT NOTICE


Power Supplies

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

For use with Static White


Ordering Code - DMX Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS-Power Supply, 120-277VAC	DMX-DMX (0.1%)	D-Dry	96-96 Watts 3x96-3x96 Watts	24-24 VDC

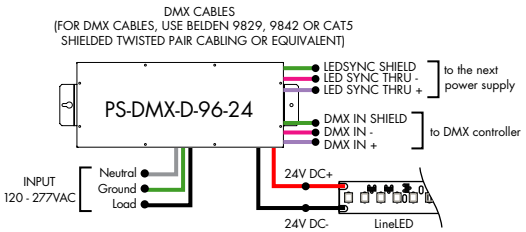

MODELS	96W	3X96
Length	14.40"	15.00"
Width	5.20"	6.62"
Depth	2.60"	4.56"


ZONAL CONTROL POWER SUPPLIES.
CONTROL MULTIPLE TAPES/ZONES USING DMX CHANNELS.

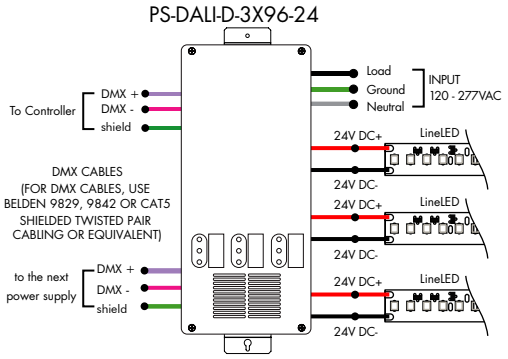

For use with Static White

Ordering Code - Non-Dimming Power Supply, 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS-Power Supply, 120-277VAC	ND-Non Dimming	D-Dry	96-96 Watts	24-24 VDC

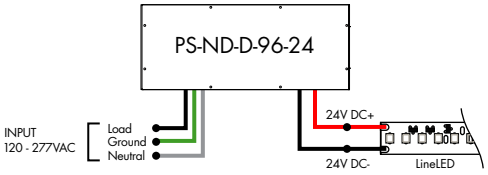


MODELS	96W
Length	14.40"
Width	5.20"
Depth	2.60"

For use with Static White

Ordering Code - In-Ground Power Supplies

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS120-Power Supply, 120VAC PS240-Power Supply, 240VAC PS277-Power Supply, 277VAC	ELV-ELV Dimming (1%)	IG-In Ground	2X96-2X96 Watts	24-24 VDC

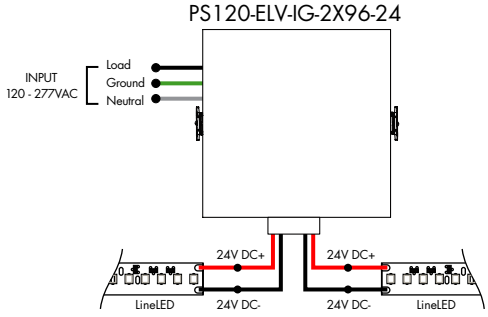

MODELS	2X96W
Length	8.40"
Width	8.30"
Depth	8.10"


Power Supplies

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

For use with Static White

Ordering Code - Athena VintageDim® 0-10V Two Channel LED Driver, 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT	FEATURE
PS-Power Supply, 120-277VAC	010V-2CH-0-10V Dimming Two Channel Control, LED1 Brightness and LED2 Brightness	D-Dry	96-96 W	24-24 VDC	AWNR-Athena

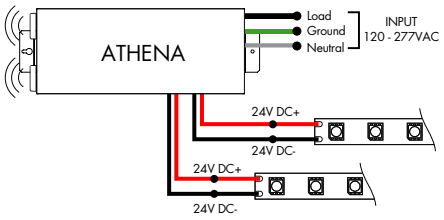

MODELS	96W
Length	14.40"
Width	5.20"
Depth	2.60"

LUTRON®


Luminii is a Lutron OEM Advantage Partner

Lutron Power Supplies 1%

MODEL

L3DA4U1UKL-CV240

HiLume™ 1% EcoSystem Voltage LED driver 40W max

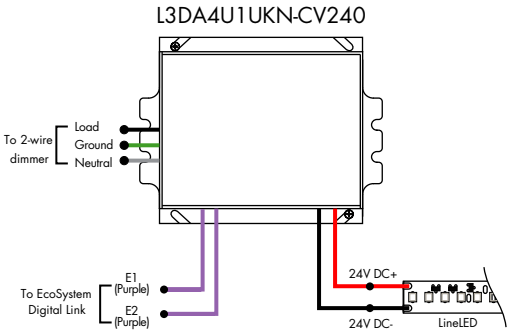

MODELS	L3DA4U1UKL-CV240
Length	4.98"
Width	4.00"
Depth	2.62"

LUTRON®


Luminii is a Lutron OEM Advantage Partner

Lutron Power Supplies 0.1%

MODEL

L3D0-96W24V-U

HiLume™ 0.1% EcoSystem Voltage LED Driver with Soft-On, Fade-to-Black™ 96W max

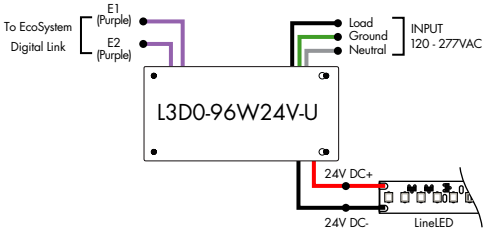

MODELS	L3D0
Length	10.50"
Width	5.50"
Depth	2.00"