
Krest Edge System - Dynamic Color | Linear Mud-In Illumination System

luminii

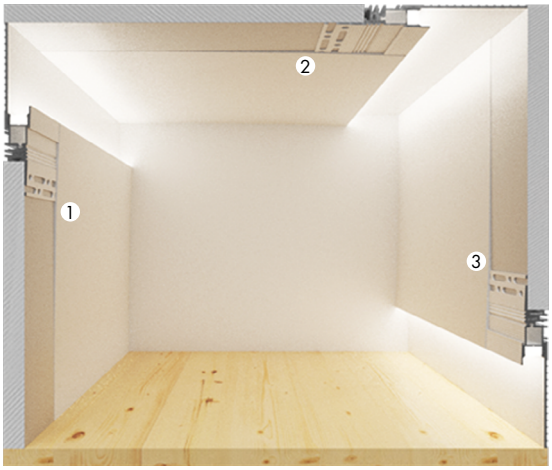


Warm Dimming | Tunable White | RGB | RGBW | Pixel

Features

- Krest Edge is a perimeter straight edge reveal that can be used in wall-to-ceiling perimter lighting, ceiling-to-wall perimeter lighting, or toe-kick lighting
- Class 2, LED strip listed for damp locations
- Krest System is a turn-key solution for complex layouts and runs - coming with pre-welded corners and specific power feed extrusions for installation ease.
- For use with 5/8" or thicker drywall
- Shipped as field configurable strip and channel
- Indirect, dot free even illumination
- Warm Dim follows the incandescent dimming curve and is compatible with MLV, ELV, and Incandescent dimmers.
- Tunable White allows individual control of CCT and output, can be paired with Vintage Dim power supply for warm dim effect
- RGB offers balanced output across the color gamut and a true white with RGBW
- Smart Pixel allows for infinite color combinations with cascading and chasing effects
- Average Life (L70): 50,000hrs
- 7 year warranty

1 - Straight Edge Reveal / Wall-To-Ceiling Perimeter
2 - Ceiling-To-Wall Perimeter
3 - Toe-Kick lighting



Technical Information

TYPE	Warm Dim			Tunable White			RGB		RGBW		Pixel	
OUTPUT OPTIONS	WD51 (18K-30K)			TW51 (27K-65K)			RGB42		RGBW36		RGBX18	RGBWX18
	SO	HO	VHO	SO	HO	VHO	SO	HO	SO	HO	SO	SO
Lumens Output (All On w/ Clear Lens)	85 lm/ft	178 lm/ft	253 lm/ft	188 lm/ft	234 lm/ft	316 lm/ft	95 lm/ft	139 lm/ft	95 lm/ft	158 lm/ft	76 lm/ft	115 lm/ft
Average Power Consumption (for a 4' section)	2.3 W/ ft	4.7 W/ ft	6.9 W/ ft	4.4 W/ ft	5.4 W/ ft	7.6 W/ ft	4.5 W/ft	8.3 W/ft	4 W/ft	7.6 W/ft	4.5 W/ft	5.7 W/ft
Efficacy	37 lm/W	38 lm/W	37 lm/W	43 lm/W	43 lm/W	42 lm/W	21 lm/W	17 lm/W	24 lm/W	21 lm/W	17 lm/W	20 lm/W
Max Run Length (in series)	37 ft	22 ft	15 ft	28.9 ft	22 ft	15 ft	28ft	14ft	26ft	13ft	30ft	20ft
Ambient Operating Temperature Range*	-4°F – 122°F (-20°C – 50°C)		-4°F – 95°F (-20°C – 35°C)	-4°F – 122°F (-20°C - 50°C)	-4°F – 113°F (-20°C - 45°C)	-4°F – 86°F (-20°C - 30°C)	-4°F – 122°F (-20°C - 50°C)	-4°F – 86°F (-20°C - 30°C)	-4°F – 122°F (-20°C - 50°C)	-4°F – 86°F (-20°C - 30°C)	-4°F – 122°F (-20°C - 50°C)	-4°F – 104°F (-20°C - 40°C)
Control/Dimming Protocol	0–10V, DALI, DALI2, MLV (Triac), ELV, Inc.			0–10V, DMX, DALI-DT8			DMX, DALI-DT8		DMX, DALI-DT8		SPI Protocol UCS 2903	SPI Protocol UCS 2904

*Ambient Operating Temperature Range to maintain L70 of 50k+ hours in normal mounting conditions for the fixture. Exceeding Ambient Operating Temperature Range may result in decreased life/output. Consult Technical Support for specific inquiries.

Warm Dim (WD51)

CCT		Multiplier (ref. - 18K30K)	TM-30 CRI	R_f	R_g	R_9
18K24K	1800K	0.90	92	85	91	86
	2400K		96	95	104	97
18K27K	1800K	0.97	92	85	91	86
	2700K		96	95	104	96
18K30K	1800K	1.00	92	85	91	86
	3000K		95	95	104	90

Tunable White (TW51)

CCT		Multiplier (ref. - 27K65K)	TM-30 CRI	R_f	R_g	R_9
18K30K	1800K	0.40	92	85	91	86
	2400K	1.00	95	93	106	98
	3000K	0.62	97	94	104	95
27K65K	2700K	0.45	97	95	103	93
	4200K	1.00	96	93	105	95
	6500K	0.58	91	90	101	63

RGBW (3000K)

Tape	TM-30 CRI	R_f	R_g	R_9
RGBW36	95	93	106	84
RGBWX18	93	91	99	64

Dominant Wavelength

Color	RGB42/ RGBW36	RGBX18/ RGBWX18
Red	620nm	621nm
Green	525nm	519nm
Blue	467nm	465nm

Ordering Code

KREST - MODEL - REFLECTOR - SHAPE - LENGTH[1] - OUTPUT[2] - CCT - LENS - MOUNTING - FINISH

KREST - Krest System
EDGE - Krest Edge
F3 - Flat 3" Reflector

SHAPE:
- STR - Straight Run
- CMLX - Complex Shape

LENGTH[1]: Overall System Length in Inches (1/16) EX: 1249.0625

SHAPE:
- UIC - U-Shape, Inside Corner
- UOC - U-Shape, Outside Corner
- UFIC - U-Shape, Flat Inside Corner
- UFOC - U-Shape, Flat Outside Corner

LENGTH[1]: Leg 1 X Leg 2 X Leg 3 in Inches (1/16) EX: 115.0625 X 13.50 X 235.125

SHAPE:
- LIC - L-Shape, Inside Corner
- LOC - L-Shape, Outside Corner
- LFIC - L-Shape, Flat Inside Corner
- LFOC - L-Shape, Flat Outside Corner
- RECIC - Rectangle, Inside Corner
- RECOC - Rectangle, Outside Corner
- RECFIC - Rectangle, Flat Inside Corner
- RECFOC - Rectangle, Flat Outside Corner

LENGTH[1]: Leg 1 X Leg 2 in Inches (1/16) EX: 115.0625 X 13.50

OUTPUT[2]:
- WD51SO - Standard
- WD51HO - High
- WD51VHO - Very High

CCT:
- 18K24K - 1800K - 2400K
- 18K27K - 1800K - 2700K
- 18K30K - 1800K - 3000K

OUTPUT[2]:
- TW51SO - Standard
- TW51HO - High
- TW51VHO - Very High

CCT:
- 18K30K - 1800K - 3000K
- 27K65K - 2700K - 6500K

OUTPUT[2]:
- RGBW36SO - Standard
- RGBW36HO - High
- RGB42SO - Standard
- RGB42HO - High

CCT: CLR - Color

OUTPUT[2]:
- RGBWX18SO - Standard
- RGBX18SO - Standard

CCT: PXSPI - Smart Pixel Control

LENS: F - Frosted Lens

MOUNTING: GDS - Gypsum Drywall Surface


FINISH: WH - White Powder Coat

1 - Length written in decimal format to the closest sixteenth of an inch.

Applications


Ceiling-To-Wall Perimeter

Fixture mounted on 5/8" or thicker ceiling drywall. Suggested to use two layers of drywall.

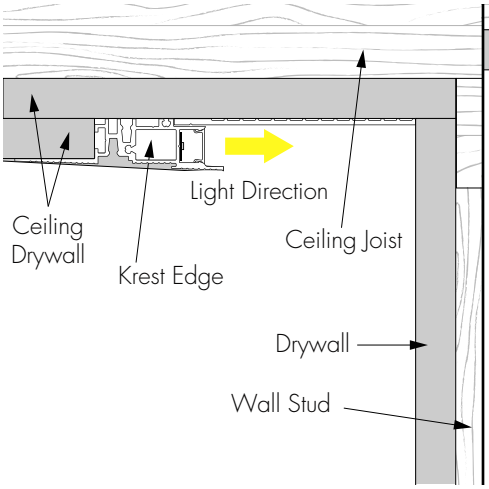


Straight Edge Reveal / Wall-To-Ceiling Perimeter

Fixture mounted on 5/8" or thicker drywall with reflector up to the ceiling.

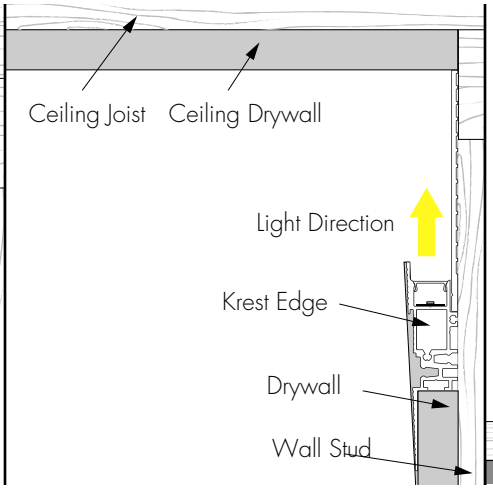


Toe-Kick lighting

Fixture mounted on 5/8" or thicker drywall with reflector touching the finished floor surface. Suggested to use two layers of drywall.

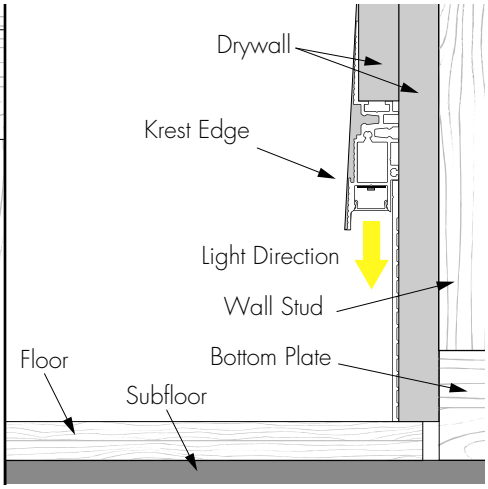

Light Transmission and Dotting

	Lens/Accessory			
Output Options	**Clear Lens**			
Dimming Level	100%	50%	10%	1%
WD51SO	ND	ND	ND	ND
WD51HO	ND	ND	ND	ND
WD51VHO	ND	ND	ND	ND
TW51SO (All On)	ND	ND	ND	ND
TW51HO (All On)	ND	ND	ND	ND
TW51VHO (All On)	ND	ND	ND	ND
TW51SO (1 CH)	ND	ND	ND	ND
TW51HO (1 CH)	ND	ND	ND	ND
TW51VHO (1 CH)	ND	ND	ND	ND
RGBW36SO	ND	ND	ND	ND
RGBW36HO	ND	ND	ND	ND
RGB42SO	ND	ND	ND	ND
RGB42HO	ND	ND	ND	ND
RGBWX18SO	CD	CD	CD	CD
RGBX18SO	CD	CD	CD	CD
Transmission Percentage	100%			



CD - Clear Dotting


SD - Slight Dotting


ND - No Dotting


Use complete Dotting Chart Tool online for more dotting information


I'm also click-able

Product Dimensions

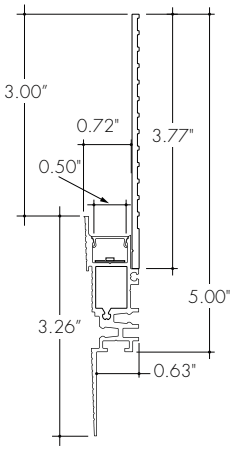

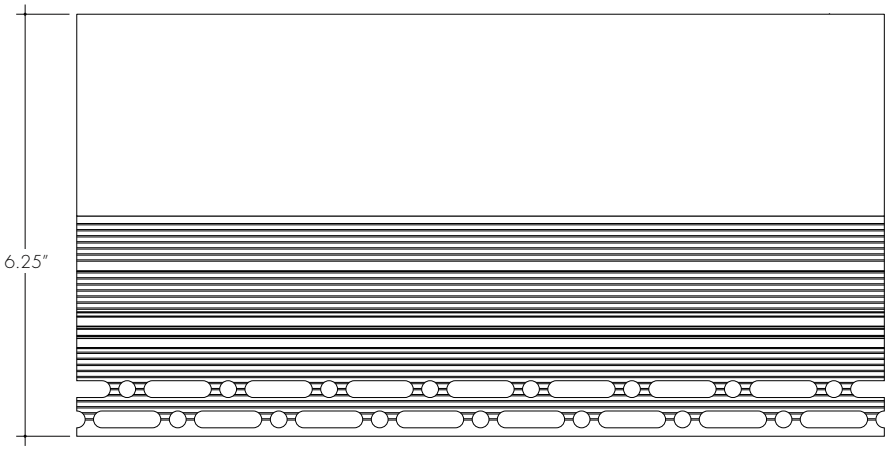

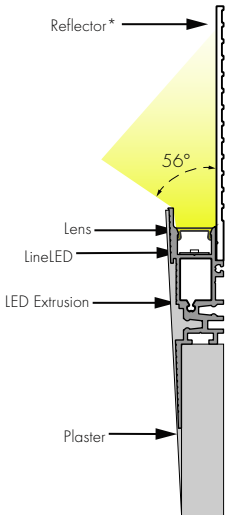

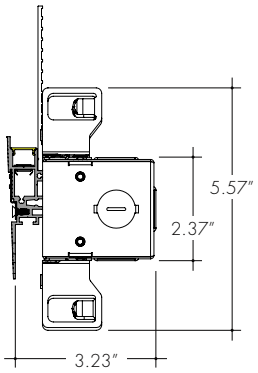


Krest Edge with Junction Box

*Krest LED Extrusion and Krest Reflectors are not mechanically joined and instead are two seperate pieces.

Finish Options

- Finish options are only applied to the Reflector, LED extrusion will be in silver anodized finish.


White
Powder Coat



White is a polar bright white and field paintable.


Krest System - What's Included

A - Krest Straight Extrusion

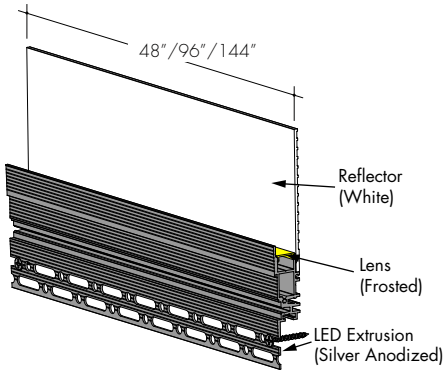


Included with Krest System, the Krest Straight extrusion is the main architectural housing for the majority of the system run. It includes the LED extrusion, lens, reflector, front joiner, and mounting screws. Provided in lengths of 48"/96"/144" long.

B - Krest Power Feed

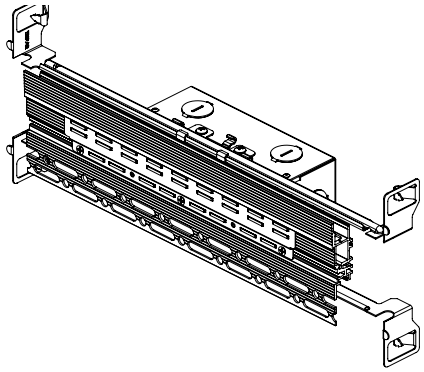


Included with Krest System, the Krest Power Feed has specially machined slots for wire management. It includes the LED extrusion, junction box, back joiner, front joiner, front slot cover, and trap door covers. 12" long.
Note: Does NOT include the lens or reflector.

C - LineLED

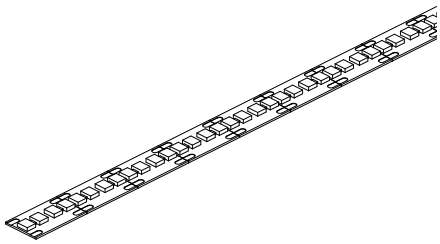


Included with Krest System, the LineLED will be split into runs based on system layout and max run length of the LED strip. By default, the LineLED will come with soldered leads (SL) on end and no connector (NC) on the other. Additonal configurations available upon request.


D - Krest Corner Power Feed
Based on ordered Run

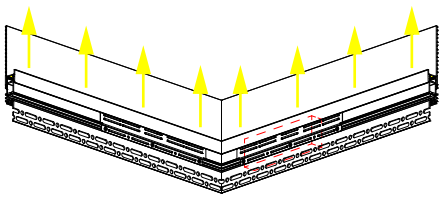

Krest Inside Corner

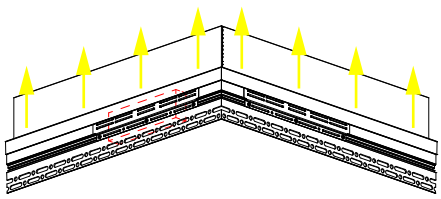

Krest Outside Corner

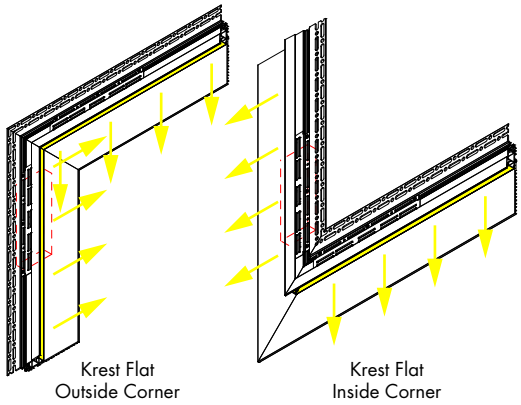


Krest Flat Outside Corner

Krest Flat Inside Corner

Included with Krest System, the Krest Edge Corner Power Feed has pre-welded corners and specially machined slots for wire management. Includes the welded LED extrusion, lens, reflector (only welded on flat corners), junction box, front joiner, two front slot covers, and four trap door covers. Corners are nominally 18" x 18".
NOTE: ALL CORNERS CAN FEED POWER TO LED STRIPS IN BOTH DIRECTIONS. JUNCTION BOX SHOWN IN RED.


Krest System - Sample Layout

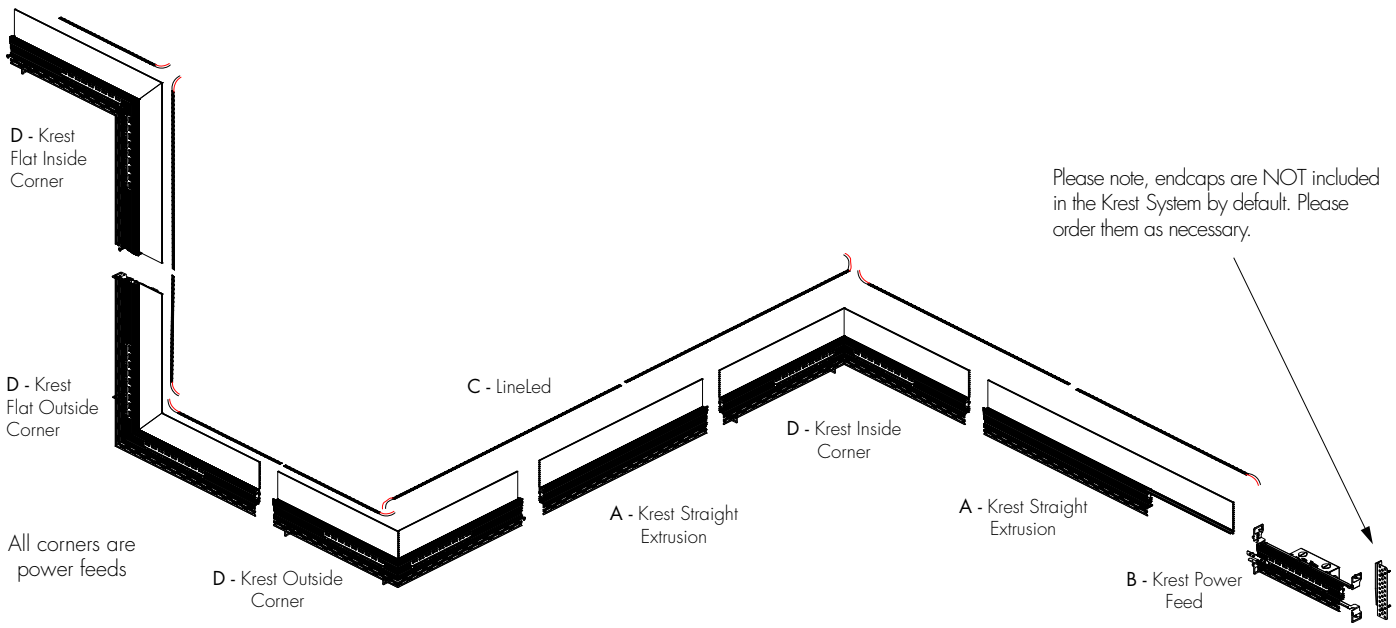


Accessories - Sold Separately

EC-KRESTC-EDGE-F3-WH-LR


Krest endcap pair, compatible with Flat 3" Reflector Plate, White Finish



Includes both left and right endcap as well as mounting screws.
NOTE: Not included in Krest System - ordered separately only

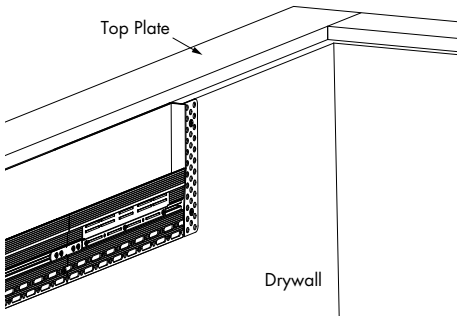


Use endcaps when ending system run in the middle of a wall.

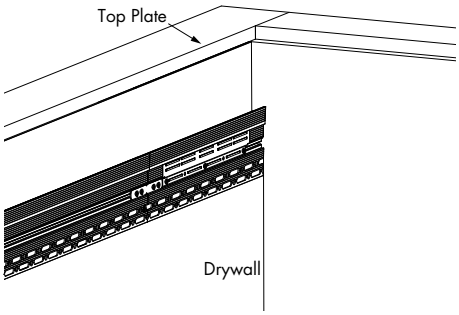

Endcaps not needed when system run ends at adjacent perpendicular wall surface

JB-KRESTC


Krest Junction Box with Hanger Bars

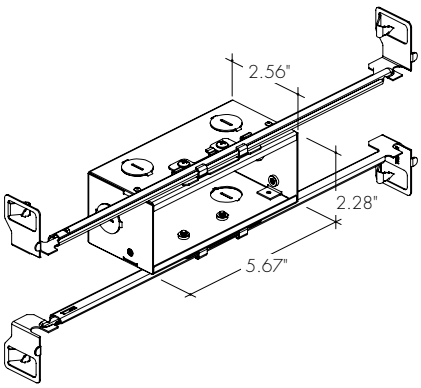

For use when wanting more than one junction box on the Krest Edge Corner Channel
NOTE: Does not mechanically mate to Krest Extrusion

DUST-CVR-KRESTC

Krest Dust Cover Foam Roll

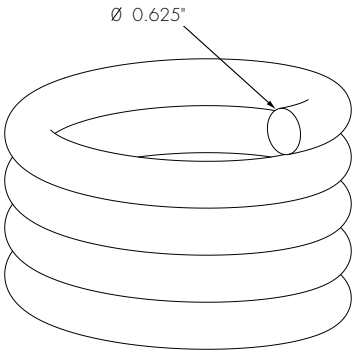

Included with Krest System, the foam dust cover is used during the installation process to protect the LED cavity during plastering.
NOTE: Provided per foot. Max continuous length is 100ft

Power Consumption

Please visit the link/QR code below to access the Luminii Power Consumption Chart tool on our website.

There you will be able to select your fixture, ouput, and desired power feed to get a full power consumption table.

I'm also click-able

Desired Nominal Length: _____

Desired Output: _____

Desired CCT: _____

Voltage Drop Calculator

The below chart assumes nominal voltage of 24 Volts and a Voltage Drop Allowance of 3% through the wire

Wattage [W]	Wire Length From Power Supply to Start of Run [ft]						
	12 AWG	14 AWG	16 AWG	18 AWG	20 AWG	22 AWG	24 AWG
5	1088.2	684.4	430.3	270.6	170.2	107.1	67.3
10	544.1	342.2	215.1	135.3	85.1	53.5	33.7
15	362.7	228.1	143.4	90.2	56.7	35.7	22.4
20	272.0	171.1	107.6	67.7	42.6	26.8	16.8
25	217.6	136.9	86.1	54.1	34.0	21.4	13.5
30	181.4	114.1	71.7	45.1	28.4	17.8	11.2
35	155.5	97.8	61.5	38.7	24.3	15.3	9.6
40	136.0	85.5	53.8	33.8	21.3	13.4	8.4
45	120.9	76.0	47.8	30.1	18.9	11.9	7.5
50	108.8	68.4	43.0	27.1	17.0	10.7	6.7
55	98.9	62.2	39.1	24.6	15.5	9.7	6.1
60	90.7	57.0	35.9	22.6	14.2	8.9	5.6
65	83.7	52.6	33.1	20.8	13.1	8.2	5.2
70	77.7	48.9	30.7	19.3	12.2	7.6	4.8
75	72.5	45.6	28.7	18.0	11.3	7.1	4.5
80	68.0	42.8	26.9	16.9	10.6	6.7	4.2
85	64.0	40.3	25.3	15.9	10.0	6.3	4.0
90	60.5	38.0	23.9	15.0	9.5	5.9	3.7
96	56.7	35.6	22.4	14.1	8.9	5.6	3.5

Power Supplies

See fixture and power supply instructions & spec sheet for wiring information. Dimming possible in select models - view Luminii website for list of compatible dimmers.

For use with Warm Dim

Ordering Code - Universal Dimming Power Supplies 0.1% 120VAC - 277VAC


MODEL		INPUT CONTROL		WATTAGE		OUTPUT
	–		–		–	
PS - Power Supply, 120-277VAC		UNI - 0-10V Dimming (0.1%), Phase Dimming (0.1%)		30 - 30 Watts 60 - 60 Watts 96 - 96 Watts 3x96 - 3x96 Watts		24 - 24 VDC

Compatibility: View a complete list of compatible dimmers on the PS-UNI product page.


0-10V - 0.1% dimming
MLV/ELV/TRIAC - 0.1% dimming, consult dimming compatibility chart

MODELS	PS-UNI-30W	PS-UNI-60W	PS-UNI-96W	PS-UNI-3X96W
Length	6.50"	7.40"	8.66"	11.85"
Width	3.73"	3.73"	3.73"	4.32"
Depth	1.61"	1.61"	1.61"	1.81"

PS-UNI-30/60/96

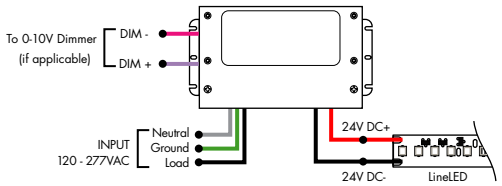


PS-UNI-3X96

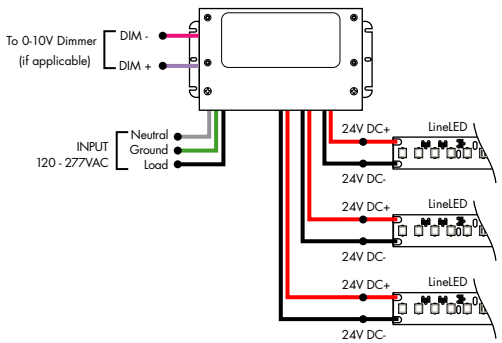

Ordering Code - DALI 2 Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL		INPUT CONTROL		ENVIRONMENT		WATTAGE		OUTPUT
	-		-		-		-	
PS - Power Supply, 120-277VAC		DALI2-DT6 - DALI2 DT6 (0.1%)		D - Dry		96 - 96 Watts		24 - 24 VDC

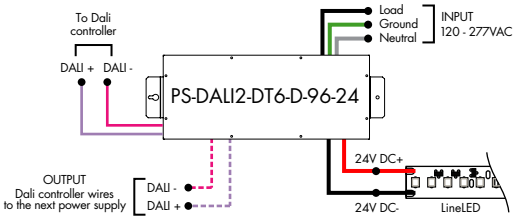

Model	96W
Length	14.40"
Width	5.20"
Depth	2.60"


Power Supplies

See fixture and power supply instructions & spec sheet for wiring information. Dimming possible in select models - view Luminii website for list of compatible dimmers.

For use with Warm Dim


Ordering Code - 0-10V Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS - Power Supply, 120-277VAC	010V-LIN - 0-10V Dimming (0.1%), Linear 010V-LOG - 0-10V Dimming (0.1%), Logarithmic	D - Dry	96 - 96 Watts 3x96 - 3x96 Watts	24 - 24 VDC

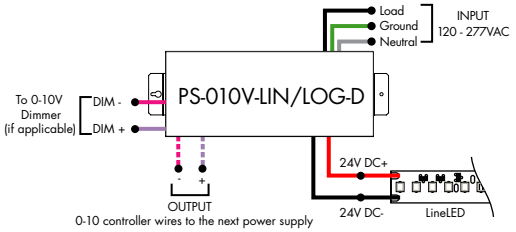

MODELS	96W	3X96
Length	14.40"	15.00"
Width	5.20"	6.62"
Depth	2.60"	4.45"


PS-010V-LIN/LOG-D-3X96

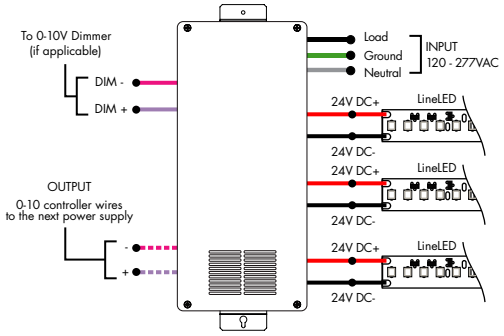

Ordering Code - Athena 0-10V LED Driver

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT	FEATURE
PS - Power Supply, 120-277VAC	010V-LIN - 0-10V Dimming (0.1%), Linear 010V-LOG - 0-10V Dimming (0.1%), Logarithmic	D - Dry	96 - 96 Watts	24 - 24 VDC	AWNR - Athena Wireless Node

PS-010V-LIN/LOG-D-96-ANWR

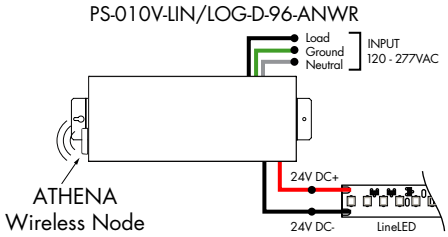

MODELS	96W
Length	14.40"
Width	5.20"
Depth	2.60"


Power Supplies

See fixture and power supply instructions & spec sheet for wiring information. Dimming possible in select models - view Luminii website for list of compatible dimmers.

For use with Tunable White

Ordering Code - DALI2 Dimming Power Supplies 0.1% 120VAC - 277VAC


MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS - Power Supply, 120-277VAC	DALI2-DT8 - DALI DT8 Tunable White (0.1%)	D - Dry	96 - 96 Watts	24 - 24 VDC

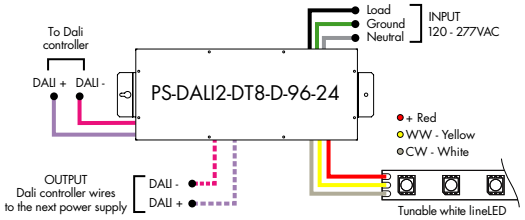

MODELS	96W
Length	14.40"
Width	5.20"
Depth	2.60"

Ordering Code - Athena DALI2 Dimming Power Supplies 0.1% 120VAC - 277VAC


MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT	FEATURE
PS - Power Supply, 120-277VAC	DALI2-DT8 - DALI DT8 Tunable White (0.1%)	D - Dry	96 - 96 Watts	24 - 24 VDC	AWNR - Athena

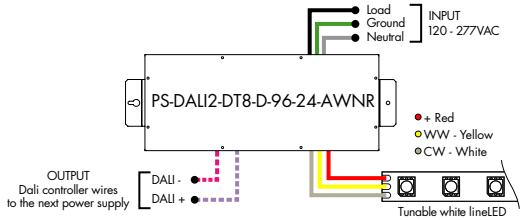

MODELS	96W
Length	14.40"
Width	5.20"
Depth	2.60"

Ordering Code - DALI2 Dimming Power Supplies 0.1% 120VAC - 277VAC - for Dim-to-Warm functionality with Tunable White Output

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS - Power Supply, 120-277VAC	DALI2-WD - DALI2 DT6 Warm Dim (0.1%)	D - Dry	96 - 96 Watts	24 - 24 VDC

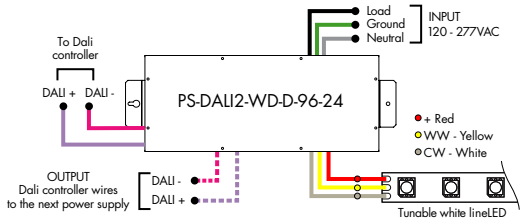

MODELS	96W
Length	14.40"
Width	5.20"
Depth	2.60"

Power Supplies

See fixture and power supply instructions & spec sheet for wiring information. Dimming possible in select models - view Luminii website for list of compatible dimmers.


For use with Tunable White


Ordering Code - DMX Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL		INPUT CONTROL		ENVIRONMENT		WATTAGE		OUTPUT
	-		-		-		-	
PS - Power Supply, 120-277VAC		DMX - DMX (0.1%)		D - Dry		96 - 96 Watts 3X96 - 3X96 Watts		24 - 24 VDC

MODELS	96W	3X96
Length	14.40"	15.00"
Width	5.20"	6.62"
Depth	2.60"	4.56"


DMX CABLES
(FOR DMX CABLES, USE BELDEN 9829, 9842,OR CAT5 SHIELDED TWISTED PAIR CABLING OR EQUIVALENT)

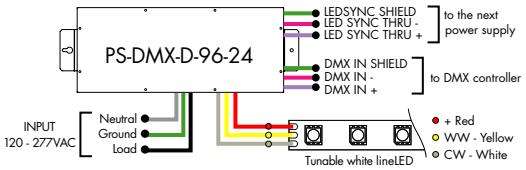

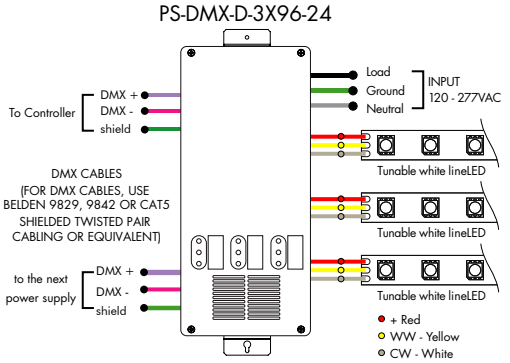


Ordering Code - VintageDim® 0-10V Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL		INPUT CONTROL		ENVIRONMENT		WATTAGE		OUTPUT
	-		-		-		-	
PS - Power Supply, 120-277VAC		010V-WD - 0 -10V Dimming (0.1%), Standard Warm Dim Curve (with Tunable White LED) 010V-TW - 0 -10V Dimming (0.1%), Two Channel Control, Brightness and CCT1-CCT2 Ratio 010V-2CH - 0 -10V Dimming (0.1%), Two Channel Control, LED1 Brightness and LED2 Brightness 010V-WDX - 0 -10V Dimming (0.1%), Customizable Warm Dim Curve (with Tunable White LED)		D - Dry		96 - 96 Watts 3X96 - 3x96 Watts[1]		24 - 24 VDC

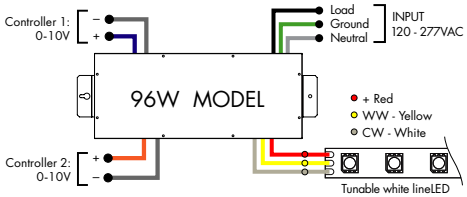

1 - 3x96 is only available with input control options 010V-WD and 010V-TW

MODELS	96W	3X96
Length	14.40"	15.00"
Width	5.20"	6.62"
Depth	2.60"	4.56"

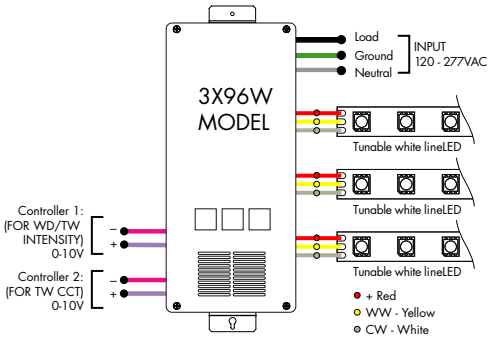

Power Supplies

See fixture and power supply instructions & spec sheet for wiring information. Dimming possible in select models - view Luminii website for list of compatible dimmers.

For use with RGB/RGBW


Ordering Code - Universal Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL		INPUT CONTROL		WATTAGE		OUTPUT
	–		–		–	
PS - Power Supply, 120-277VAC		UNI - 0-10V Dimming (0.1%), Phase Dimming (0.1%)		30 - 30 Watts 60 - 60 Watts 96 - 96 Watts 3x96 - 3x96 Watts		24 - 24 VDC


MODELS	PS-UNI-30W	PS-UNI-60W	PS-UNI-96W	PS-UNI-3X96W
Length	6.50"	7.40"	8.66"	11.85"
Width	3.73"	3.73"	3.73"	4.32"
Depth	1.61"	1.61"	1.61"	1.81"

REQUIRES A CONTROLLER AND A DECODER TO WORK PROPERLY

PS-UNI-30/60/96

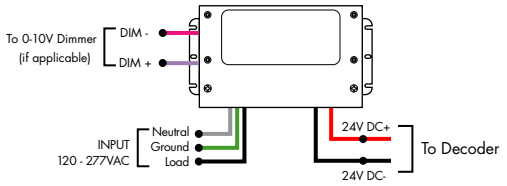

PS-UNI-3X96

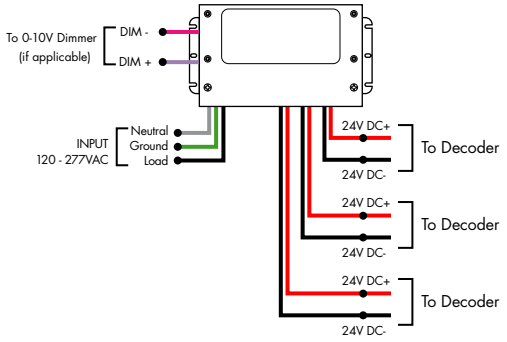


For use with RGB/RGBW

Ordering Code - DMX Dimming Power Supplies 0.1% 120VAC - 277VAC


MODEL		INPUT CONTROL		ENVIRONMENT		WATTAGE		OUTPUT
	-		-		-		-	
PS - Power Supply, 120-277VAC		DMX - DMX (0.1%)		D - Dry		96 - 96 Watts 3X96 - 3X96 Watts		24 - 24 VDC

MODELS	96W	3X96
Length	14.40"	15.00"
Width	5.20"	6.62"
Depth	2.60"	4.56"

DMX CABLES
(FOR DMX CABLES, USE BELDEN 9829, 9842 OR CAT5 SHIELDED TWISTED PAIR CABLING OR EQUIVALENT)

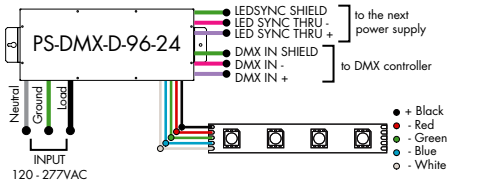

PS-DMX-D-3X96-24

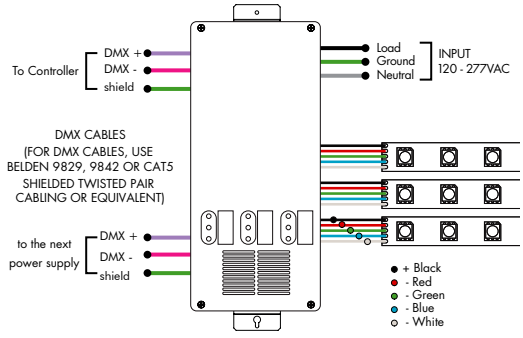


For use with RGB/RGBW/Pixel

Ordering Code - Non-Dimming Power Supply 120VAC - 277VAC

MODEL		INPUT CONTROL		ENVIRONMENT		WATTAGE		OUTPUT
	-		-		-		-	
PS - PSV Series		ND - Non Dimming		D - Dry		96 - 96 Watts		24 - 24 VDC

MODELS	96W
Length	14.40"
Width	5.20"
Depth	2.60"

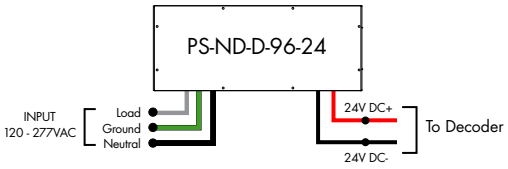

REQUIRES A CONTROLLER AND A DECODER TO WORK PROPERLY

Controllers and Decoders

For use with Tunable White Power Supplies



ORDERING CODE

MODEL

DTW-MC

DTW-MC - Tunable White controller

Tunable White wall-mount controller controls lighting fixtures, wireless control of TW lighting fixture. Fits in any standard US switch box. Includes all the outputs in the back of the controller.

Features

- Switch & dimming control function, control range > 20M.
- Smooth transition between light levels.
- Separately operate dimming and color temperature functions.
- Able to control 1 zone with endless receivers. Each receiver can maximally be controlled by 8 remotes.
- Power, temperature color and dimming functions operated by push button after receivers are connected.

Operating Voltage

3V DC battery

Color Parameters

- Brightness
- Saturation
- Fading



ORDERING CODE

MODEL

TW-DMX

TW-DMX - DMX controller

Tunable White DMX wall-mount controller is a fully touch sensitive controller designed in accordance with standard protocol DMX512. Offers fast and accurate color temperature adjustment and brightness dimming of natural white, warm white and cold white. Designed with a touch color wheel, the DMX512 controller can adjust color temperature and brightness for all white LEDs smoothly and accurately. The DMX controller can control 1 zone with endless decoders.

Features

- 1 zone
- 6 color scenes
- DMX Control
- Touch Sensitive Glass Surface
- Dimming and Speed Control
- Memory Function
- Easily Fits Standard US Switch Boxes

Operating Voltage

12 - 24V DC

Color Parameters

- Brightness
- Saturation
- Primary colors
- Fading
- Color changing speed



ORDERING CODE

MODEL

SLD-DIMTW

SLD-DIMTW - Tunable white LED dimming module

The SLD DimTW is a constant voltage warm dimming LED dimming module. The unique dimming module accepts 0-10V control and mimics a smooth, incandescent dimming curve.

Features

- Flicker free 0-100% dimming
- High efficiency up to 97%
- High precision dimming ratio:>1:1000
- Fully isolated plastic housing
- Comply with EN55015 and FCC part 15 without additional input filter and capacitors
- compact size, high reliability
- 3 years warranty

Operating Voltage

8-48 VDC

Controllers and Decoders

For use with Tunable White, RGB/RGBW Power Supplies



Translates controller DMX512 programs for RGB and white LED strips.

Unique DMX address for the decoder can be set easily and displayed by the numeric display on the case. Changing and resetting the DMX address requires manual input.

Use power repeater to expand output.

Operating Voltage

12-36 VDC

Power Capacity

up to 96W at 24V

Operating Temperature Range

from -4°F to +122°F in case

ORDERING CODE

MODEL

DDMX-RGBW

DDMX-RGBW - DMX decoder



The RGBW receiver is easily paired with controller by the click of a button. Receiver can be reset to factory settings at any time.

Each receiver can store one static RGB color, one color sequence, and one brightness setting for the white LED strip. Receivers assigned to the same scene within the same zone will have the same LED static color and color sequence.

Operating Voltage

12-36 VDC

Power Capacity

up to 96W at 24V

Operating Temperature Range


from -4°F to +122°F in case

ORDERING CODE

MODEL

RGBW-RC-R

RGBW-RC-R - RGBW receiver

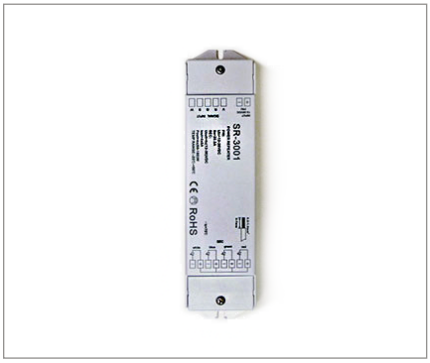

Extends identical signal when connected in series to an RGBW LED control system. The RGBW signal repeater works with Luminii RGB and RGBW controllers, receivers, and decoders.

RGBW signal can be extended indefinitely when adequate power supply (not included) is connected to the system.

Operating Voltage

12-36 VDC

Power Capacity

up to 96W at 24V

Operating Temperature Range

from -4°F to +122°F in case

ORDERING CODE

MODEL

RGBW-SR

RGBW-SR - RGBW signal repeater

Controllers and Decoders

For use with RGB/RGBW Power Supplies



ORDERING CODE

MODEL

RGBW-MC3

RGBW-MC3 - 4-zone RGBW controller

Easy to operate wireless interface suitable for static or color changing scenes. Control 4 different color zones separately or at the same time. RGBW receiver (RGBW-RC-R) required for operation. Assign multiple receivers per zone to cover a large area.

Color wheel enables highly stable and sensitive color control functionality. Create your own color changing sequences with ease and flexibility.

Power

qty 3 AAA batteries

Scenes

up to 4 unique zones

Signal

Wireless (RF)

Energy Saving

Deactivates after 10 seconds of inactivity

Color Parameters

- Brightness
- Saturation
- Primary colors
- Speed of color changing sequence
- Fading



ORDERING CODE

MODEL		ZONES		COLOR
	-		-	

DMX - DMX Controller

3Z - Three Zone
1Z - One Zone

RGBW - Red,Green, Blue,& White

DMX /Wireless RGB-W wall-mount controller controls DMX lighting fixtures, wireless control of RGB-W lighting fixture or use both simultaneously. Fits in any standard US switch box. Includes all the outputs in the back of the controller.

Control brightness levels with a single touch, personalize and memorize 3 different scenes, and even create 3 variations of white.

Features

- 2 in 1 in-Wall Controller: DMX Control or Wireless RGB-W
- 65,000 Color Options, Dimming and Speed Control
- Memory Function
- 50 Foot Wireless Range
- Easily Fits Standard US Switch Boxes
- Touch Sensitive Glass Surface
- Includes 10 Built in Programs, or Create and Play Your Own


Operating Voltage

12 - 24V DC

Color Parameters

- Brightness
- Saturation
- Primary colors
- Fading
- Color changing speed

For use with Tunable White, RGB/RGBW, Pixel Power Supplies

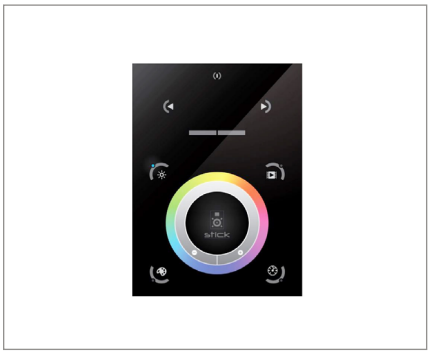

ORDERING CODE

MODEL

TSDMX-E

TSDMX-E - Touchscreen DMX controller

Programmable advanced DMX512 lighting controller featuring a touch-screen interface. Operates as stand alone controller or integrated with most architectural lighting control systems. Can controller endless DMX512 enabled devices.

Mounts to standard single or dual gang wall box with the included power supply inside the junction box. Terminal block design for power and data connections.

Features

- Sleek glass design which sits 0.43" from the wall
- Graphical color display to show selected environment
- Color/dimmer/speed palette
- Color temperature mixing
- Touch sensitive buttons. No mechanical parts
- Touch sensitive wheel allows for accurate color selection
- Multi-zone microSD memory
- Multi-room control with 500 scenes, 10 zones
- 1024 DMX channels. Control 340 RGB fixtures
- USB & Ethernet connectivity for programming and control

Power Supply

7 VDC (included)

Programmability

PC, Mac, Tablet, Smartphone

Output Signal


DMX512 (1024 channels)

Color Parameters

- Brightness
- Saturation
- Speed of color changing sequence
- Fading / dimming / brightness

Controllers and Decoders

For use with Tunable White, RGB/RGBW Power Supplies

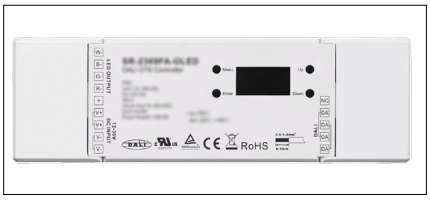

ORDERING CODE

MODEL

DALI2-DT8-RGBW

DALI2-DT8-RGBW - DALI-2 RGBW Decoder

A 4-channel DALI2 DT8 decoder designed to control RGB, RGBW, and TW LED fixtures, featuring adjustable color temperature and customizable lumen output.

Voltage/Frequency
12-36VDC

Max Output Power
4 output channels, 60-180W each

Max Output Current
4 output channels, max of 5A each

Ambient Operating Temperature Range
-20 to 50°C

Environment
Dry (IP20)



ORDERING CODE

MODEL

DDMX-5CH-RDM-PRO

DDMX-5CH-RDM-PRO - DMX512 Decoder

DMX512 decoder with RDM functionality features 5 PWM output channels with common anode. High PWM output frequency range allows the product to be used in HD video conferencing spaces.
All DMX products to be installed per DMX512 Standard.

Power
96 Watt

Inputs
RJ45, XLR-5Pin, Terminal Block

DMX Channels
1 to 5 settable

PWM Output Resolution Ratio
8 or 16 bit

PWM Output Frequency
500Hz - 30KHz

Output Dimming Curve Gamma Value
0.1 ~ 9.9



ORDERING CODE

MODEL

RGBW-WI-R

RGBW-WI-R - WIFI generator

RGBW-WI-R creates a local network that enables any electronic device (phone, tablet, etc.) to control the RGB/W strip connected to a RGBW-RC-R receiver.


The control functions are achieved through a free application download for Android and iOS devices called REALCOLOR.

Operating Voltage
12-36 VDC

Power Supply
PI-130-24 (included)

Operating Temperature Range
from -4°F to +122°F in case

For use with Pixel Power Supplies

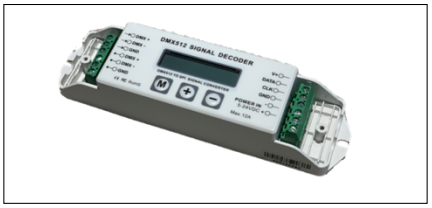

ORDERING CODE

MODEL

SR-DMX-SPI

SR-DMX-SPI - Smart Pixel Decoder

The SR-DMX-SPI is a smart LED pixel decoder that controls RGB/RGBW pixel LED strips with SPI signal. Designed with an OLED backlit panel, the pixel controller allows for easy configuration of most settings. Four push buttons are available for control of the LED functions.

*For pixel only.

Features

- 2 in 1 in-Wall Controller: DMX Control or Wireless RGB-W
- SPI signal output for RGB/RGBW pixel light control
- DMX512 controllable and RF/WIFI remote controllable
- Capable of addressing up to 1020 RGB pixels & 765 RGBW pixels
- OLED panel allows for easy configuration

Operating Voltage
12 - 36V DC

Power capacity
up to 96W at 24V

Operating temperature range
from -4°F to +122°F in case