

## Features

Kurba Grazer 3D™ is a wall grazing, energy efficient and flexible LED strip suitable for wet locations capable of vertical/top bends down to 8" radius and Horizontal/side bends up down 16" radius. The silicone material offers excellent heat, weather, UV, and solvent resistance and has a special coating to repel dust and dirt accumulation.

### Output Options

- Tunable White allows individual control of CCT and output
- RGB options offer balanced output across the color gamut and a true white with RGBW
- Smart Pixel offerings allow for infinite color combinations with cascading and chasing effects

### Average Life (L70)


50,000 hours

### Approvals

24VDC Class 2 wet listed, IP67

### Warranty

5 years



### Finish Options

White  Black



### RoHS Declare



## Technical Information

Finish Option	White				Black			
Output	TW9SO	RGB9SO	RGBW9SO	SPI9SO	TW9SO	RGB9SO	RGBW9SO	SPI9SO
Light Output at (All On)	274 lm/ft	237 lm/ft	280 lm/ft	256 lm/ft	243 lm/ft	201 lm/ft	237 lm/ft	212 lm/ft
Average Power Consumption at 4'	7.32 W/ft	7.32 W/ft	7.32 W/ft	7.32 W/ft	7.32 W/ft	7.32 W/ft	7.32 W/ft	7.32 W/ft
Efficacy	37 lm/W	32 lm/W	38 lm/W	35 lm/W	33 lm/W	27 lm/W	32 lm/W	29 lm/W
Ordering Increment	9.84"	9.84"	9.84"	9.84"	9.84"	9.84"	9.84"	9.84"
Maximum Run Length (In Series)	156"	156"	156"	156"	156"	156"	156"	156"
Operating Temperature Range	-40°F to 131°F	-40°F to 131°F	-40°F to 131°F	-40°F to 113°F	-40°F to 131°F	-40°F to 131°F	-40°F to 131°F	-40°F to 113°F
Control/Dimming Protocol	0-10V, DMX	DMX	DMX	SPI Protocol UCS 2904	0-10V, DMX	DMX	DMX	SPI Protocol UCS 2904

## Constraints

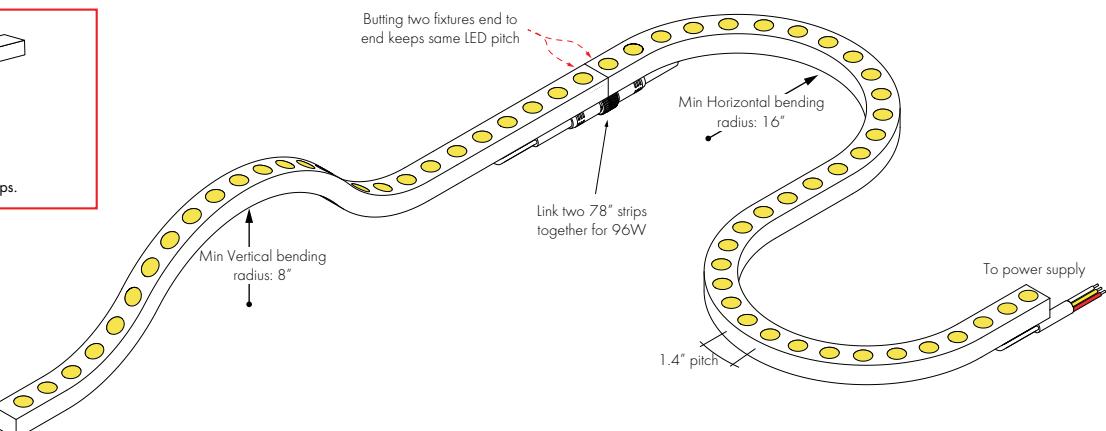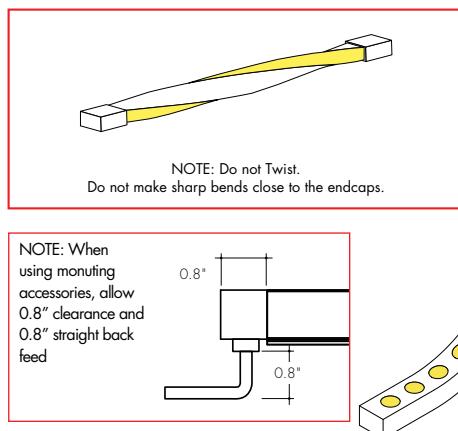

## Ordering Code

MODEL <sup>1</sup>	BEND DIRECTION	LENGTH	OUTPUT	CCT	CRI	LENS <sup>2</sup>	MOUNTING	FINISH	FEED POSITION LEFT	FEED POSITION RIGHT
KBG-W - Kurba Grazer 3D™ Wet	3D - 3D Bending	SEE PCC CHART ON PAGE 5	TW9SO - Tunable White, Standard Output	27K65K - 2700K-6500K	R80 - 80 CRI	20X20 - Grazer (20°) 20X30 - Elliptical Beam (20°x30°)	NA - See Page 3 for orderable mounting accessories	WH - White BK - Black	INJECTION MOLD <sup>3</sup> IMB - Back Wire Feed <sup>4</sup> NPF - No Power Feed <sup>5</sup>	INJECTION MOLD <sup>3</sup> IMB - Back Wire Feed <sup>4</sup> NPF - No Power Feed <sup>5</sup>
			RGB9SO - RGB, Standard Output	RGB - Red, Green, Blue		20X50 - Elliptical Beam (20°x50°)				
			RGBW9SO - RGBW, Standard Output	RGB30K - RGB 3000K		40X40 - Elliptical Beam (40°x40°)				
			SPI9SO - Smart Pixel Control, Standard Output	RGB30K - RGB 3000K					QUICK CONNECT IMFB - Back Female QC <sup>6</sup> IMMB - Back Male QC <sup>6</sup> NPF - No Power Feed <sup>5</sup>	QUICK CONNECT IMFB - Back Female QC <sup>6</sup> IMMB - Back Male QC <sup>6</sup> NPF - No Power Feed <sup>5</sup>

1 - Please note, lead time is 8-10 weeks for KBG

2 - 40X40 lens option only available with RGB9SO, RGBW9SO, & SPI9SO outputs. RGB9SO, RGBW9SO, & SPI9SO outputs must use 40X40 lens option


3 - Injection Mold Soldered Wire Feeds (IMB) come with 118" wire leads

4 - Order IMB (Injection Mold Soldered Lead Wires) when connecting KBG to power supply.

5 - NPF-NPF for Feed Position 1&2 is not a valid configuration option

6 - Order IMFB (Female QC/C) and IMMB (Male QC/C) when joining multiple KBG fixtures

## Product Dimensions

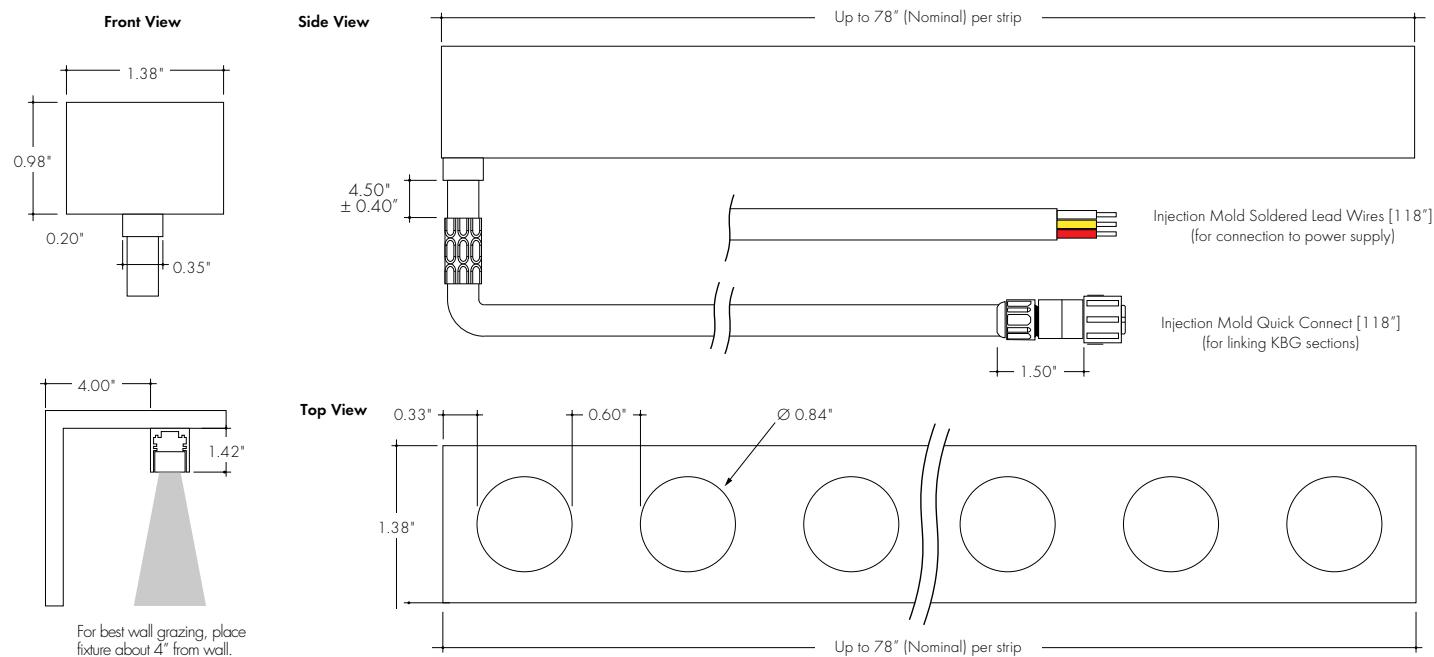


Note: Each 78" Kurba Grazer 3D™ section is 48W. Two 78" Kurba Grazer 3D™ strips may be joined together in series up to 156" for a continuous run.

## Linking and Extension Cable Options

### ANTI-WICKING FERRULE

Included on every power feed wire



### POWER FEED OPTIONS

Feeds come with 118" Injection Mold wire leads

WH



BK



Tunable White/ Pixel  
3 Conductor, 18 AWG

RGB



4 Conductor, 22 AWG  
RGBW  
5 Conductor, 22 AWG

### POWER FEED OPTIONS

Feeds come with 118" Quick Connect wire leads

WH



Female



BK



Female



Tunable White/ Pixel  
3 Conductor

RGB  
4 Conductor

RGBW  
5 Conductor

Please note, Power Feed Finish will match Kurba Fixture Finish

## Finish Options

- A wide variety of finish options allowing complete customization of style and aesthetic.

### Basic Option

White



Kurba's base finish is a crisp white which brings a timeless, clean aesthetic that brightens and enhances any space.

### Premium Option

Black




Black is a dark, pitch-black with a soft flat finish. This finish brings a bold, modern look, adding a touch of cosmic elegance to any space.

## Mounting Accessories and Optional Connectors

### MC-KBG-SAP-SM-2-SA

KBG Mounting Channel, Serrated Aluminum Profile, Surface Mount, 2in x 1.4in tall. Silver Anodized



Aluminum mounting channel providing grip. For use with light strip mounted to the ceiling.

### MC-KBG-SAP-SM-78-SA


KBG Mounting Channel, Serrated Aluminum Profile, Surface Mount, 78in x 1.4in tall, Silver Anodized



Aluminum mounting channel providing grip. For use with light strip mounted to the ceiling.

### MB-KBG-ADJ-SS



KBG Adjustable Mounting Bracket, Stainless Steel, 180° of rotation

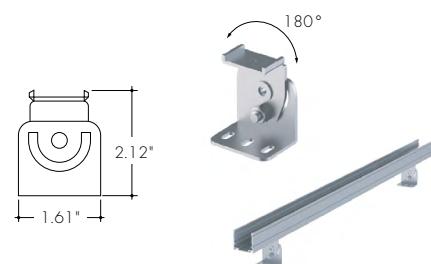

Note: Rotation angle restricted if the bracket is applied to a bending extrusion profile. Recommended to only use on straight mounting channel for full rotation. 1 recommended every foot.

### MC-KBG-BSAP-HB-SM-38-SA

KBG Mounting Channel, Bendable Serrated Aluminum Profile, Horizontal Bending, Surface Mount, 38in, Silver Anodized

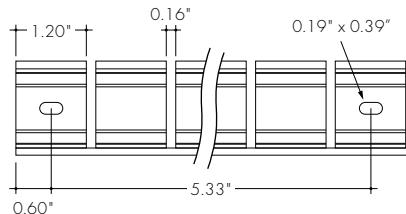
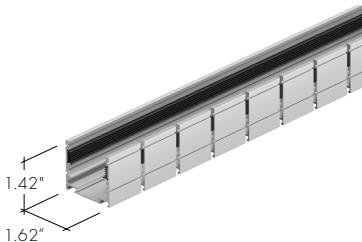


Aluminum mounting channel providing grip. For use with light strip mounted to the ceiling.

**NOTE: HB - Horizontal Bending Only**

### MC-KBG-BSAP-VB-SM-38-SA

KBG Mounting Channel, Bendable Serrated Aluminum Profile, Vertical Bending, Surface Mount, 38in, Silver Anodized

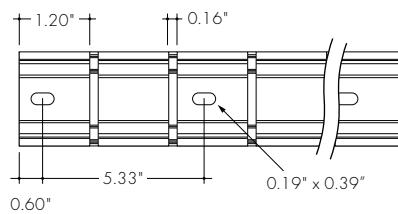



Aluminum mounting bracket providing grip. For use with light strip mounted to the ceiling.

**NOTE: VB - Vertical Bending Only**

### MC-KBG-BGS-HB-78-SA

KBG Bendable Glare Shield, Horizontal Bending, 78in, Silver Anodized

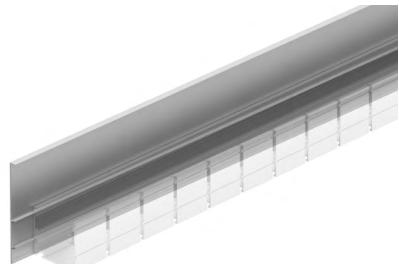


Attaches to Mounting profiles, cannot be used on its own. 24" bending radius.

**NOTE: Not compatible with VB - Vertical Bending**


### LVSP-WET

Splice box: wet rated, low voltage, gray, IP66




### LVSP-WET-CM

Connector for splice box, low voltage for cable management, gray




## Photometry


**KBG-W-3D-48-TW9SO-27K65K-20X20-NA-WH**  
Kurba Grazer 3D, 4ft, 2700K - 6500K, 20° Grazer Lens

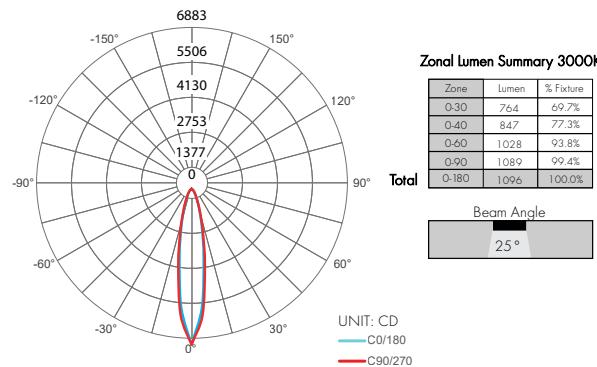


**KBG-W-3D-48-TW9SO-27K65K-20X50-NA-WH**  
Kurba Grazer 3D, 4ft, 2700K - 6500K, 20°X50° Elliptical Lens

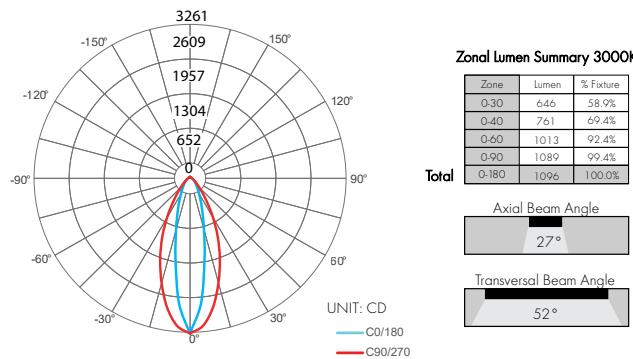

**KBG-W-3D-48-TW9SO-27K65K-20X30-NA-WH**  
Kurba Grazer 3D, 4ft, 2700K - 6500K, 20°X30° Elliptical Lens

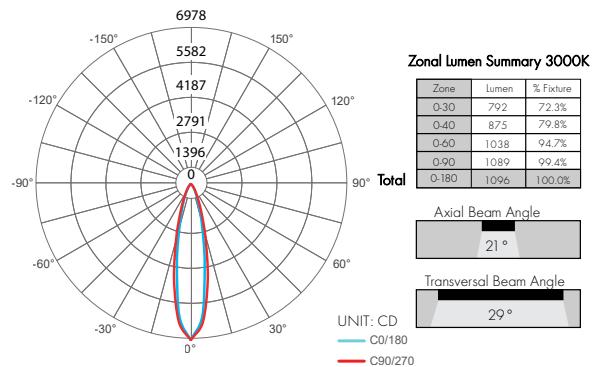


**KBG-W-3D-48-RGBWW9SO-RGB30K-40X40-NA-WH**  
Kurba Grazer 3D, 4ft, RGB-3000K, 40°X40° Elliptical Lens

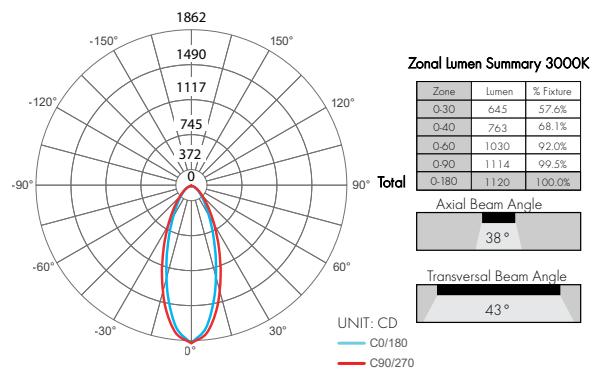

## TW9SO | Power Consumption Per Fixture Length

Based on operation with PDCU series of power supplies. Use Actual Length for Order Code Entry.  
 Tolerance for Actual Lengths less than 6 ft is +/- 0.2", Actual Lengths between 6 ft and 16 ft is +/- 0.3", and Actual Lengths greater than 16 ft is +/- 0.6"  
 A - Back Connector at one end of Kurba and No Connector at other end of Kurba (0.16" + 0.08" added to overall length)  
 B - Back Connector at both ends of Kurba (0.20" + 0.20" added to overall length)


Nominal Length (in)	W	Actual Length (in)	
		A	B
10	6.1	<b>10.1</b>	<b>10.2</b>
20	12.1	<b>19.9</b>	<b>20.0</b>
30	24.4	<b>29.8</b>	<b>29.8</b>
40	24.2	<b>39.6</b>	<b>39.7</b>
50	30.2	<b>49.5</b>	<b>49.5</b>
60	36.2	<b>59.3</b>	<b>59.4</b>
69	42.2	<b>69.1</b>	<b>69.2</b>
79	48.2	<b>79.0</b>	<b>79.1</b>



## RGB9SO | Power Consumption Per Fixture Length

Based on operation with PDCU series of power supplies. Use Actual Length for Order Code Entry.  
 Tolerance for Actual Lengths less than 6 ft is +/- 0.2", Actual Lengths between 6 ft and 16 ft is +/- 0.3", and Actual Lengths greater than 16 ft is +/- 0.6"  
 A - Back Connector at one end of Kurba and No Connector at other end of Kurba (0.16" + 0.08" added to overall length)  
 B - Back Connector at both ends of Kurba (0.20" + 0.20" added to overall length)


Nominal Length (in)	W	Actual Length (in)	
		A	B
10	6.1	<b>10.1</b>	<b>10.2</b>
20	12.1	<b>19.9</b>	<b>20.0</b>
30	24.4	<b>29.8</b>	<b>29.8</b>
40	24.2	<b>39.6</b>	<b>39.7</b>
50	30.2	<b>49.5</b>	<b>49.5</b>
60	36.2	<b>59.3</b>	<b>59.4</b>
69	42.2	<b>69.1</b>	<b>69.2</b>
79	48.2	<b>79.0</b>	<b>79.1</b>



## RGBW9SO | Power Consumption Per Fixture Length

Based on operation with PDCU series of power supplies. Use Actual Length for Order Code Entry.  
 Tolerance for Actual Lengths less than 6 ft is +/- 0.2", Actual Lengths between 6 ft and 16 ft is +/- 0.3", and Actual Lengths greater than 16 ft is +/- 0.6"  
 A - Back Connector at one end of Kurba and No Connector at other end of Kurba (0.16" + 0.08" added to overall length)  
 B - Back Connector at both ends of Kurba (0.20" + 0.20" added to overall length)


Nominal Length (in)	W	Actual Length (in)	
		A	B
10	6.1	<b>10.1</b>	<b>10.2</b>
20	12.1	<b>19.9</b>	<b>20.0</b>
30	24.4	<b>29.8</b>	<b>29.8</b>
40	24.2	<b>39.6</b>	<b>39.7</b>
50	30.2	<b>49.5</b>	<b>49.5</b>
60	36.2	<b>59.3</b>	<b>59.4</b>
69	42.2	<b>69.1</b>	<b>69.2</b>
79	48.2	<b>79.0</b>	<b>79.1</b>



## SPI9SO | Power Consumption Per Fixture Length

Based on operation with PDCU series of power supplies. Use Actual Length for Order Code Entry.  
 Tolerance for Actual Lengths less than 6 ft is +/- 0.2", Actual Lengths between 6 ft and 16 ft is +/- 0.3", and Actual Lengths greater than 16 ft is +/- 0.6"  
 A - Back Connector at one end of Kurba and No Connector at other end of Kurba (0.16" + 0.08" added to overall length)  
 B - Back Connector at both ends of Kurba (0.20" + 0.20" added to overall length)

Nominal Length (in)	W	Actual Length (in)	
		A	B
10	6.1	<b>10.1</b>	<b>10.2</b>
20	12.1	<b>19.9</b>	<b>20.0</b>
30	24.4	<b>29.8</b>	<b>29.8</b>
40	24.2	<b>39.6</b>	<b>39.7</b>
50	30.2	<b>49.5</b>	<b>49.5</b>
60	36.2	<b>59.3</b>	<b>59.4</b>
69	42.2	<b>69.1</b>	<b>69.2</b>
79	48.2	<b>79.0</b>	<b>79.1</b>




## Power Supplies

See fixture and power supply instructions & spec sheet for wiring information. Dimming possible in select models - view Luminii website for list of compatible dimmers.

### For use with Tunable White

#### Ordering Code - DALI2 Dimming Power Supplies 0.1% 120VAC - 277VAC


MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS - Power Supply, 120-277VAC	DALI2-DT8 - DALI DT8 Tunable White (0.1%)	D - Dry	96 - 96 Watts	24 - 24 VDC

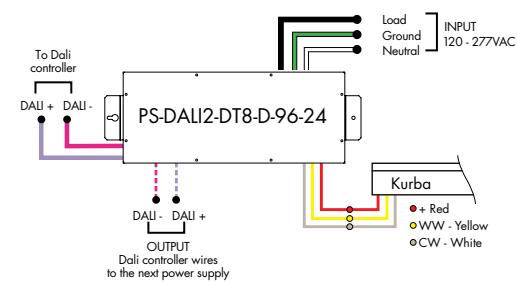

MODELS	96W
Length	14.40"
Width	5.20"
Depth	2.60"

#### Ordering Code - Athena DALI2 Dimming Power Supplies 0.1% 120VAC - 277VAC


MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT	FEATURE
PS - Power Supply, 120-277VAC	DALI2-DT8 - DALI DT8 Tunable White (0.1%)	D - Dry	96 - 96 Watts	24 - 24 VDC	AWNR - Athena

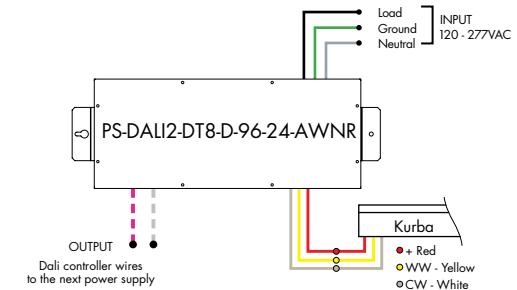

MODELS	96W
Length	14.40"
Width	5.20"
Depth	2.60"

#### Ordering Code - DALI2 Dimming Power Supplies 0.1% 120VAC - 277VAC - for Dim-to-Warm functionality with Tunable White Output



MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS - Power Supply, 120-277VAC	DALI2-WD - DALI2 DT6 Warm Dim (0.1%)	D - Dry	96 - 96 Watts	24 - 24 VDC

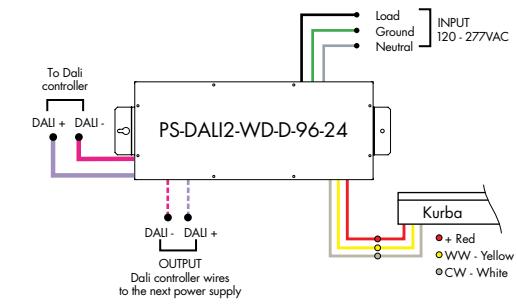

MODELS	96W
Length	14.40"
Width	5.20"
Depth	2.60"

#### Ordering Code - DMX Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS - Power Supply, 120-277VAC	DMX - DMX (0.1%)	D - Dry	96 - 96 Watts 3X96 - 3X96 Watts	24 - 24 VDC

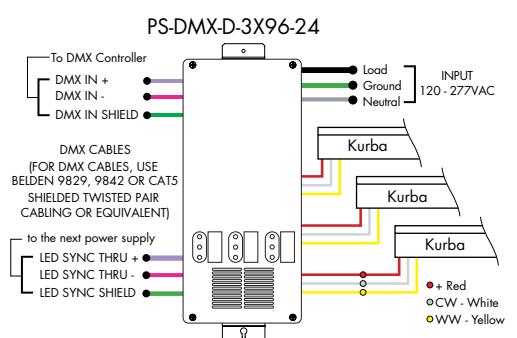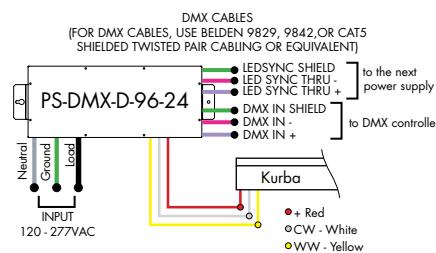

## Power Supplies


See fixture and power supply instructions & spec sheet for wiring information. Dimming possible in select models - view Luminii website for list of compatible dimmers.

### For use with Tunable White


#### Ordering Code - VintageDim® 0-10V Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT	
PS - Power Supply, 120-277VAC	010V-WD - 0-10V Dimming (0.1%), Standard Warm Dim Curve (with Tunable White LED) 010V-TW - 0-10V Dimming (0.1%), Two Channel Control, Brightness and CCT1-CCT2 Ratio 010V-2CH - 0-10V Dimming (0.1%), Two Channel Control, LED1 Brightness and LED2 Brightness 010V-WDX - 0-10V Dimming (0.1%), Customizable Warm Dim Curve (with Tunable White LED) 010V-2CHX - 0-10V Dimming (0.1%), Two Channel Control, Customizable Brightness and CCT1-CCT2 Ratio	D-Dry	96 - 96 Watts 3X96 - 3x96 Watts <sup>1</sup>	24 - 24 VDC	

1 - 3x96 is only available with input control options 010V-WD and 010V-TW

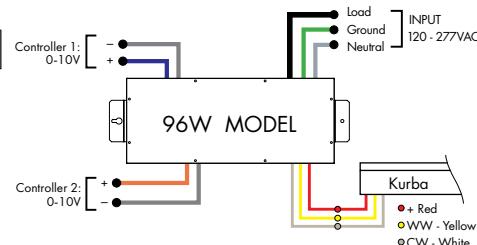


MODELS	96W	3X96
<b>Length</b>	14.40"	15.00"
<b>Width</b>	5.20"	6.62"
<b>Depth</b>	2.60"	4.56"

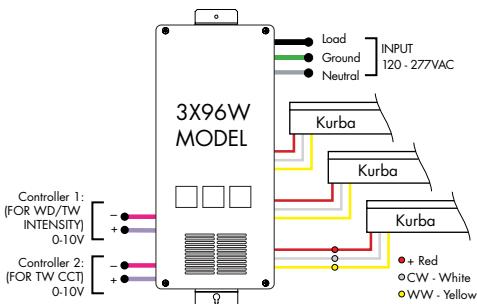

#### Ordering Code - Athena VintageDim® 0-10V Power Supply 0.1% 120VAC - 277VAC - for Dim-to-Warm functionality with Tunable White Output

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT	FEATURE
PS - Power Supply, 120-277VAC	010V-WD - 0-10V Dimming, Standard Warm Dim Curve (with Tunable White LED)	D-Dry	96-96 W	24-24 VDC	AWNR - Athena


MODELS	96W
<b>Length</b>	14.40"
<b>Width</b>	5.20"
<b>Depth</b>	2.60"

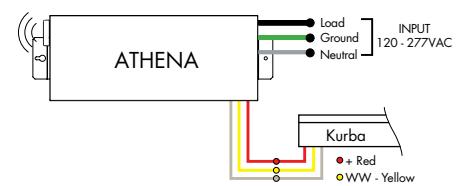

#### Ordering Code - Athena VintageDim® 0-10V Two Channel LED Driver, 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT	FEATURE
PS - Power Supply, 120-277VAC	010V-2CH - 0-10V Dimming Two Channel Control, LED1 Brightness and LED2 Brightness	D-Dry	96-96 W	24-24 VDC	AWNR - Athena

MODELS	96W
<b>Length</b>	14.40"
<b>Width</b>	5.20"
<b>Depth</b>	2.60"

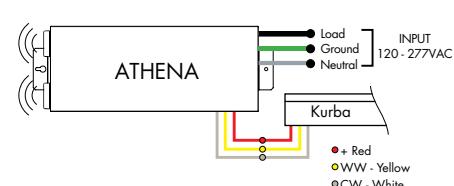


## Power Supplies

See fixture and power supply instructions & spec sheet for wiring information. Dimming possible in select models - view Luminii website for list of compatible dimmers.

### For use with RGB/RGBW


#### Ordering Code - Universal Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	WATTAGE	OUTPUT
PS - Power Supply, 120-277VAC	UNI - 0-10V Dimming (0.1%), Phase Dimming (0.1%)	30 - 30 Watts 60 - 60 Watts 96 - 96 Watts 3x96 - 3x96 Watts	24 - 24 VDC

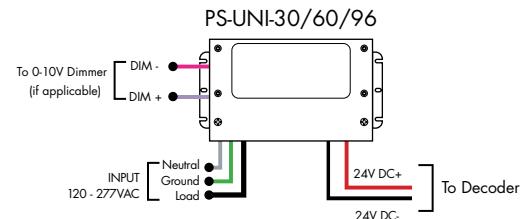

MODELS	PS-UNI-30W	PS-UNI-60W	PS-UNI-96W	PS-UNI-3X96W
<b>Length</b>	6.50"	7.40"	8.66"	11.85"
<b>Width</b>	3.73"	3.73"	3.73"	4.32"
<b>Depth</b>	1.61"	1.61"	1.61"	1.81"

REQUIRES A CONTROLLER AND A DECODER TO WORK PROPERLY

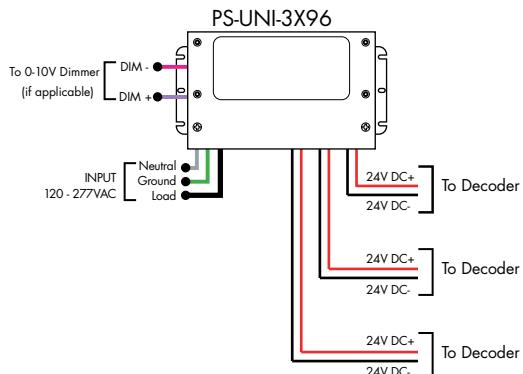



### For use with RGB/RGBW

#### Ordering Code - DMX Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS - Power Supply, 120-277VAC	DMX - DMX (0.1%)	D-Dry	96 - 96 Watts 3X96 - 3X96 Watts	24 - 24 VDC

MODELS	96W	3X96
<b>Length</b>	14.40"	15.00"
<b>Width</b>	5.20"	6.62"
<b>Depth</b>	2.60"	4.56"

DMX CABLES  
(FOR DMX CABLES, USE BELDEN 9829, 9842 OR CAT5 SHIELDED TWISTED PAIR CABLING OR EQUIVALENT)

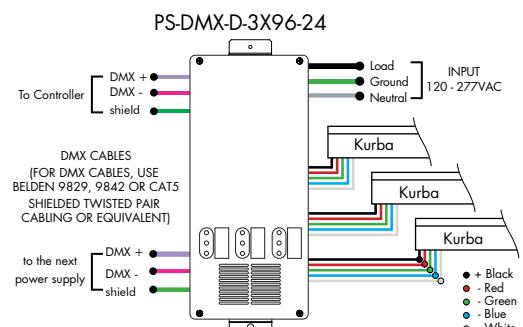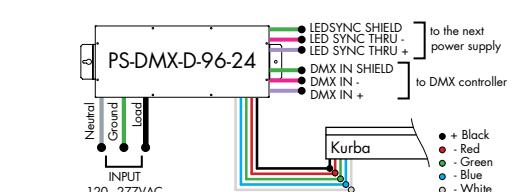


### For use with RGB/RGBW/Pixel

#### Ordering Code - Non-Dimming Power Supply 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS - PSV Series	ND - Non Dimming	D - Dry	96 - 96 Watts	24 - 24 VDC

MODELS	96W
<b>Length</b>	14.40"
<b>Width</b>	5.20"
<b>Depth</b>	2.60"

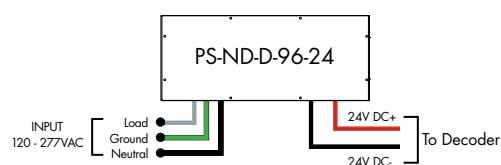

REQUIRES A CONTROLLER AND A DECODER TO WORK PROPERLY



## Controllers and Decoders

### For use with Tunable White, RGB/RGBW Power Supplies



ORDERING CODE

MODEL

DDMX-RGBW

DDMX-RGBW - DMX decoder

Translates controller DMX512 programs for RGB and white LED strips.

Unique DMX address for the decoder can be set easily and displayed by the numeric display on the case. Changing and resetting the DMX address requires manual input.

Use power repeater to expand output.

**Operating Voltage**

12-36 VDC

**Power Capacity**

up to 96W at 24V

**Operating Temperature Range**

from -4°F to +122°F in case



The RGBW receiver is easily paired with controller by the click of a button. Receiver can be reset to factory settings at any time.

Each receiver can store one static RGB color, one color sequence, and one brightness setting for the white LED strip. Receivers assigned to the same scene within the same zone will have the same LED static color and color sequence.

**Operating Voltage**

12-36 VDC

**Power Capacity**

up to 96W at 24V

**Operating Temperature Range**

from -4°F to +122°F in case

ORDERING CODE

MODEL

RGBW-RC-R

RGBW-RC-R - RGBW receiver



Extends identical signal when connected in series to an RGBW LED control system. The RGBW signal repeater works with Luminii RGB and RGBW controllers, receivers, and decoders.

RGBW signal can be extended indefinitely when adequate power supply (not included) is connected to the system.

**Operating Voltage**

12-36 VDC

**Power Capacity**

up to 96W at 24V

**Operating Temperature Range**

from -4°F to +122°F in case

ORDERING CODE

MODEL

RGBW-SR

RGBW-SR - RGBW signal repeater

## Controllers and Decoders

### For use with RGB/RGBW Power Supplies



ORDERING CODE

MODEL

RGBW-MC3

RGBW-MC3 - 4-zone RGBW controller

Easy to operate wireless interface suitable for static or color changing scenes. Control 4 different color zones separately or at the same time. RGBW receiver (RGBW-RC-R) required for operation. Assign multiple receivers per zone to cover a large area.

Color wheel enables highly stable and sensitive color control functionality. Create your own color changing sequences with ease and flexibility.

#### Power

- qty 3 AAA batteries

#### Scenes

- up to 4 unique zones

#### Signal

- Wireless (RF)

#### Energy Saving

- Deactivates after 10 seconds of inactivity

#### Color Parameters

- Brightness
- Saturation
- Primary colors
- Speed of color changing sequence
- Fading



ORDERING CODE

MODEL

ZONES

COLOR

DMX-DMX  
Controller3Z-Three Zone  
1Z-One ZoneRGBW-Red,Green,  
Blue,& White

DMX /Wireless RGB-W wall-mount controller controls DMX lighting fixtures, wireless control of RGB-W lighting fixture or use both simultaneously. Fits in any standard US switch box. Includes all the outputs in the back of the controller.

Control brightness levels with a single touch, personalize and memorize 3 different scenes, and even create 3 variations of white.

#### Features

- 2 in 1 in-Wall Controller: DMX Control or Wireless RGB-W
- 65,000 Color Options, Dimming and Speed Control
- Memory Function
- 50 Foot Wireless Range
- Easily Fits Standard US Switch Boxes
- Touch Sensitive Glass Surface
- Includes 10 Built in Programs, or Create and Play Your Own

#### Operating Voltage

12 - 24V DC

#### Color Parameters

- Brightness
- Saturation
- Primary colors
- Fading
- Color changing speed

### For use with Tunable White, RGB/RGBW, Pixel Power Supplies



ORDERING CODE

MODEL

TSDMX-E

TSDMX-E - Touchscreen DMX controller

Programmable advanced DMX512 lighting controller featuring a touch-screen interface. Operates as stand alone controller or integrated with most architectural lighting control systems. Can control endless DMX512 enabled devices.

Mounts to standard single or dual gang wall box with the included power supply inside the junction box. Terminal block design for power and data connections.

#### Features

- Sleek glass design which sits 0.43" from the wall
- Graphical color display to show selected environment
- Color/dimmer/speed palette
- Color temperature mixing
- Touch sensitive buttons. No mechanical parts
- Touch sensitive wheel allows for accurate color selection
- Multi-zone microSD memory
- Multi-room control with 500 scenes, 10 zones
- 1024 DMX channels. Control 340 RGB fixtures
- USB & Ethernet connectivity for programming and control

#### Power Supply

7 VDC (included)

#### Programmability

PC, Mac, Tablet, Smartphone

#### Output Signal


DMX512 (1024 channels)

#### Color Parameters

- Brightness
- Saturation
- Speed of color changing sequence
- Fading / dimming / brightness

## Controllers and Decoders

### For use with Tunable White, RGB/RGBW Power Supplies

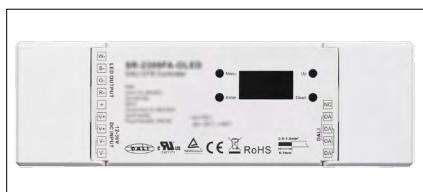

ORDERING CODE

MODEL

DALI2-DT8-RGBW

DALI2-DT8-RGBW - DALI-2 RGBW Decoder

A 4-channel DALI2 DT8 decoder designed to control RGB, RGBW, and TW LED fixtures, featuring adjustable color temperature and customizable lumen output.

**Voltage/Frequency**  
12-36VDC

**Ambient Operating Temperature Range**  
-20 to 50 °C

**Max Output Power**  
4 output channels, 60-180W each

**Environment**  
Dry (IP20)

**Max Output Current**  
4 output channels, max of 5A each



ORDERING CODE

MODEL

DDMX-5CH-RDM-PRO

DDMX-5CH-RDM-PRO - DMX512 Decoder

DMX512 decoder with RDM functionality features 5 PWM output channels with common anode. High PWM output frequency range allows the product to be used in HD video conferencing spaces. All DMX products to be installed per DMX512 Standard.

**Power**

96 Watt

**PWM Output Resolution Ratio**

8 or 16 bit

**Inputs**

RJ45, XLR-5Pin, Terminal Block

**PWM Output Frequency**

500Hz - 30KHz

**DMX Channels**

1 to 5 settable

**Output Dimming Curve Gamma Value**

0.1 ~ 9.9



ORDERING CODE

MODEL

RGBW-WI-R

RGBW-WI-R - WiFi generator

RGBW-WI-R creates a local network that enables any electronic device (phone, tablet, etc.) to control the RGB/W strip connected to a RGBW-RC-R receiver.

The control functions are achieved through a free application download for Android and iOS devices called REALCOLOR.

**Operating Voltage**

12-36 VDC

**Operating Temperature Range**

from -4°F to +122°F in case

**Power Supply**

PI-130-24 (included)

### For use with Pixel Power Supplies



ORDERING CODE

MODEL

SR-DMX-SPI

SR-DMX-SPI - Smart Pixel Decoder

The SR-DMX-SPI is a smart LED pixel decoder that controls RGB/RGBW pixel LED strips with SPI signal. Designed with an OLED backlit panel, the pixel controller allows for easy configuration of most settings. Four push buttons are available for control of the LED functions.

\*For pixel only.

**Features**

- 2 in 1 in-Wall Controller: DMX Control or Wireless RGB-W
- SPI signal output for RGB/RGBW pixel light control
- DMX512 controllable and RF/WIFI remote controllable
- Capable of addressing up to 1020 RGB pixels & 765 RGBW pixels
- OLED panel allows for easy configuration

**Operating Voltage**

12 - 36V DC

**Power capacity**

up to 96W at 24V

**Operating temperature range**

from -4°F to +122°F in case