


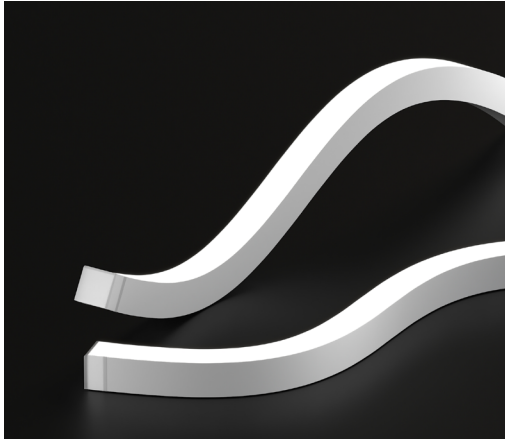

Features

Kurba Max is a dot free direct view, highly versatile, energy efficient and flexible LED strip suitable for outdoor wet locations capable of horizontal/side bends and vertical/top bends with a 8" bending radius. The silicone material offers excellent heat, weather, UV, and solvent resistance and has a special coating to repel dust and dirt accumulation.

Applications

Indoor/Outdoor dry & wet location

Materials

Silicone for red list approved, as well as heat, weather, UV, and solvent resistance

Dimming

Dimable down to 1%. Dot Free even illumination. Also available with Black Lens

Average Life (L70)


50,000 hours

Approvals

24VDC Class 2 wet listed, IP68

Warranty

5 years

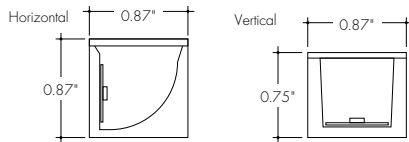

Finish Options (see page 2 for additional information)

Base ☐ White



Technical Information

Bending Direction	Horizontal		Vertical	
Output	43SO	44HO	43SO	44HO
Light Output at 3000K, 80CRI	335 lm/ft	437 lm/ft	396 lm/ft	536 lm/ft
Average Power Consumption at 4'	5.03 W/ft	5.03 W/ft	5.03 W/ft	5.03 W/ft
Efficacy	67 lm/W	87 lm/W	79 lm/W	107 lm/W
Ordering Increment	1.97"	2.19"	1.97"	2.19"
Maximum Run Length (In Series)	19'	19'	19'	19'
Operating Temperature Range	-40°F to 113°F	-40°F to 113°F	-40°F to 113°F	-40°F to 113°F

CCT INFO / LUMEN MULTIPLIER (ref. -3000K)

Bending Direction	Horizontal		Vertical	
	80 CRI	90 CRI	80 CRI	90 CRI
2200K	0.95	0.74	0.94	0.75
2700K	0.99	0.81	0.99	0.81
3000K	1.00	0.80	1.00	0.80
3500K	1.01	0.80	1.01	0.80
4000K	1.08	0.82	1.08	0.82

Ordering Code

MODEL	BEND DIRECTION	LENGTH	OUTPUT ¹	CCT	CRI	LENS	MOUNTING	FINISH	FEED POSITION LEFT	FEED POSITION RIGHT
KBX-W - Kurba Max Wet	HB - Horizontal Bending VB - Vertical Bending	SEE PCC CHART ON PAGES 7 - 8	43SO - Standard 44HO - High	22K - 2200K 27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K	R80 - 80 CRI R90 - 90 CRI	SF - Silicone Frosted	NA - See Page 6 for orderable mounting accessories	WH - White	INJECTION MOLD IME - End Feed 1 IMB - Back Feed 1 IMSA - Side A Feed IMSB - Side B Feed ² NPF - No Power Feed ³	INJECTION MOLD IME - End Feed 1 IMB - Back Feed 1 IMSA - Side A Feed IMSB - Side B Feed ² NPF - No Power Feed ³

Feeds come with 118" wire leads


1 - Title 24 JA8 compliance achievable, contact factory for specific requests

2 - IMSB - Side B Feed not available with HB - Horizontal Bending

3 - NPF-NPF for Feed Position 1&2 is not a valid configuration option


Powerfeeds and Connectors

Power Feed Position Options and Orientation

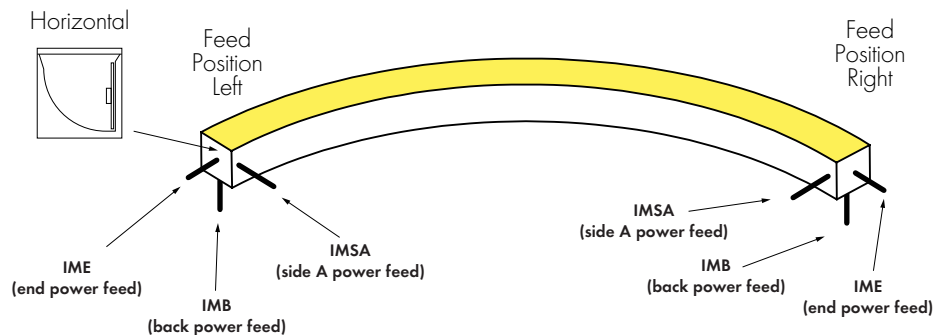

NOTE: IMSB - Side B Feed not available with HB - Horizontal Bending


Horizontal Bend Direction

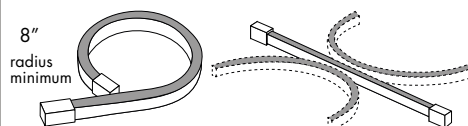

Illuminated surface shown in gray


Horizontal Prohibited Bends

Twisting or bending LED in these positions will cause damage




Illuminated surface shown in gray

Do not make sharp bends near the endcap

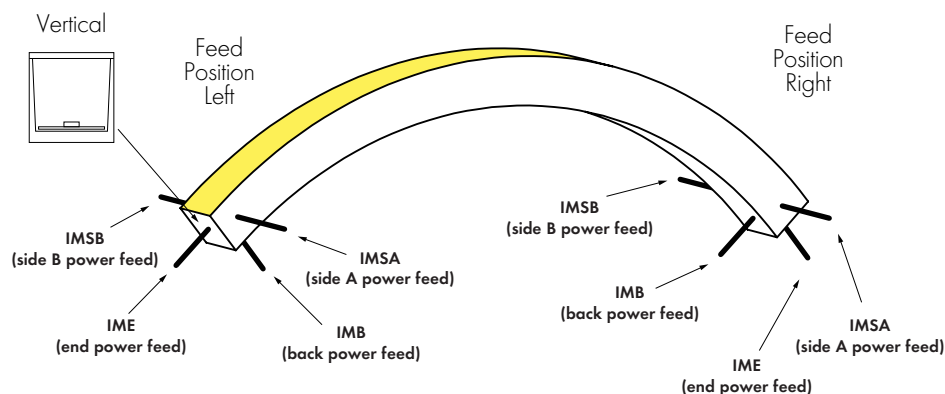

Vertical Bend Direction


Bend LED in these positions only to avoid damage

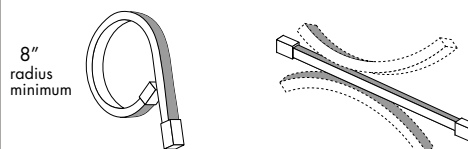

Illuminated surface shown in gray

Vertical Prohibited Bends

Twisting or bending LED in these positions will cause damage



Illuminated surface shown in gray


Do not make sharp bends near the endcap

Powerfeed Options

Horizontal


END CONNECTOR

Injection-molded End Connector
-IME

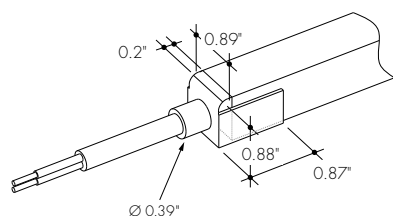


BACK CONNECTOR

Injection-molded Back Connector
-IMB




SIDE CONNECTOR

Injection-molded Side Connector
-IMSA




ENDCAP (NO CONNECTOR)

Injection-molded Cap (No Connector)
-NPF



ANTI-WICKING FERRULE

Included on every power feed wire



POWER FEED OPTIONS

Feeds come with 118" wire leads




2 Conductor, 18 AWG

Vertical


END CONNECTOR

Injection-molded End Connector
-IME

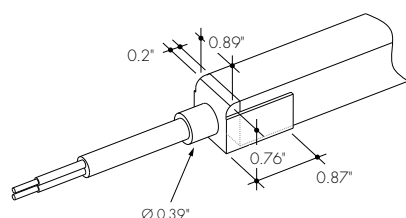


BACK CONNECTOR

Injection-molded Back Connector
-IMB




SIDE CONNECTOR

Injection-molded Side Connector
-IMSA and -IMSB




ENDCAP (NO CONNECTOR)

Injection-molded Cap (No Connector)
-NPF



ANTI-WICKING FERRULE

Included on every power feed wire



POWER FEED OPTIONS

Feeds come with 118" wire leads




2 Conductor, 18 AWG



Product Dimensions

Horizontal



Kurba Max Cross Sections





Example Feed Position
IME - NPF
End Feed 1 to
No Power Feed

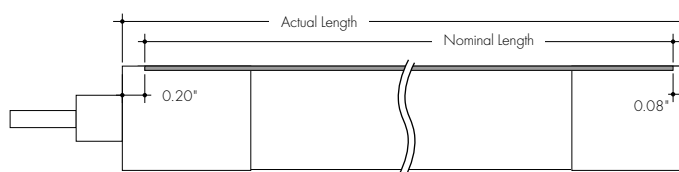



Example Feed Position
IMSA - NPF
Side A Feed to
No Power Feed

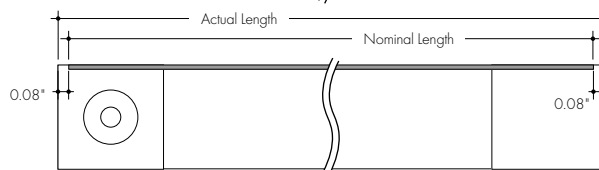

Example Feed Position
IMB - NPF
Back Feed 1 to
No Power Feed

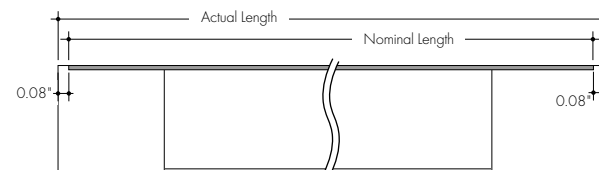


Example Feed Position
IME - IME
End Feed 1 and
End Feed 1

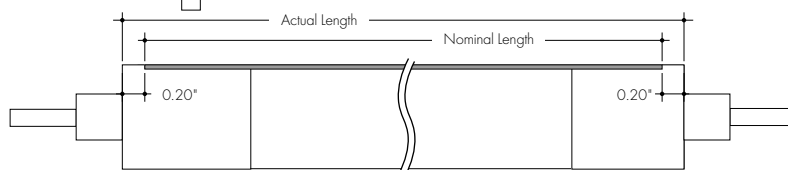



Vertical



Kurba Max Cross Sections





Example Feed Position
IME - NPF
End Feed 1 to
No Power Feed

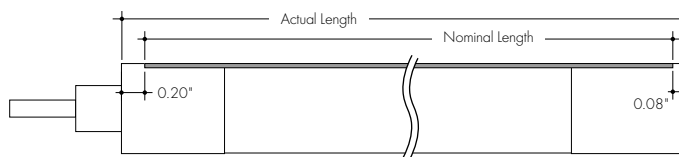



Example Feed Position
IMSA - NPF
Side A Feed to
No Power Feed

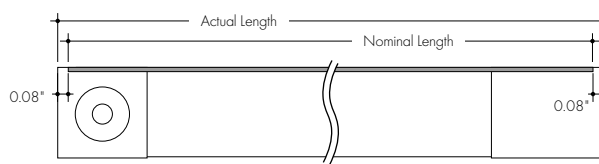

Example Feed Position
IMB - NPF
Back Feed 1 to
No Power Feed

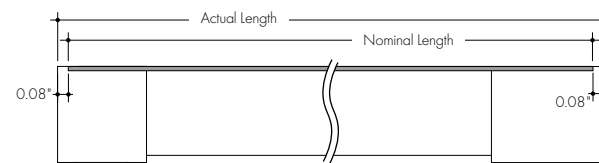

Example Feed Position
IME - IME
End Feed 1 and
End Feed 1

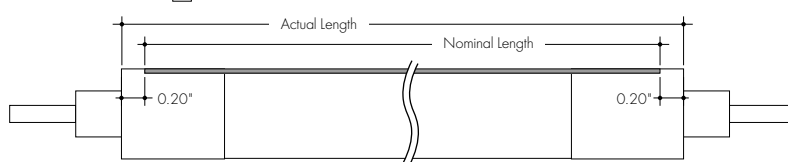

Finish Options

White
Base



Kurba's base finish is a crisp white which brings a timeless, clean aesthetic that brightens and enhances any space

Light Transmission and Dotting


Output Options	Lens/Finish
	Silicone Frosted/ White Finish
43SO	ND
44HO	ND
Transmission Percentage	100%



CD SD ND
CD - Clear Dotting
SD - Slight Dotting
ND - No Dotting

Photometry

KBX-W-HB-48-44HO-30K-R80-SF-NA-WH
Kurba Max, Horizontal Bend, 4ft, 3000K, 80 CRI,
44HO output, Silicone Frosted Lens

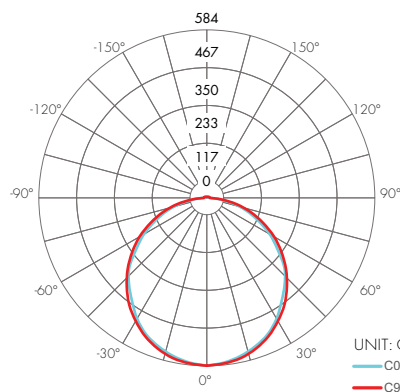

Zonal Lumen Summary 3000K


Zone	Lumen	% Fixture
0-30	452	25.9%
0-40	622	35.6%
0-60	1318	75.4%
0-90	1720	98.4%
0-180	1748	100.0%

Total

Beam Angle



KBX-W-VB-48-44HO-30K-R80-SF-NA-WH
Kurba Max, Vertical Bend, 4ft, 3000K, 80 CRI,
44HO output, Silicone Frosted Lens

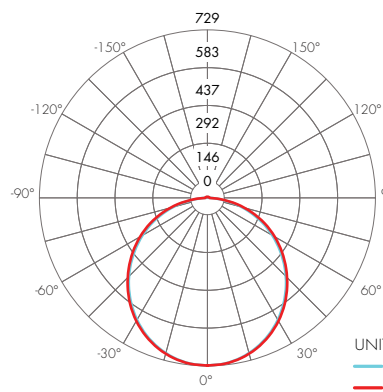

Zonal Lumen Summary 3000K

Zone	Lumen	% Fixture
0-30	562	26.2%
0-40	772	36.0%
0-60	1629	76.0%
0-90	2120	98.9%
0-180	2144	100.0%

Total



Beam Angle



Mounting Accessories

MC-KBX-SAP-SM-0.8-SA



KBX Mounting Channel, Serrated Aluminum Profile, Surface Mount, 0.8in, Silver Anodized

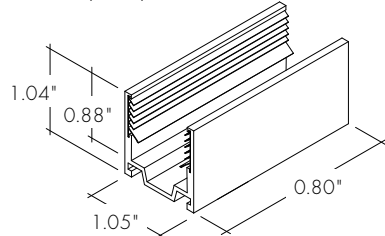

For use with light strip mounted to the ceiling. 1 recommended every 8 in. Includes 1 mounting screw

MC-KBX-SAP-SM-78-SA



KBX Mounting Channel, Serrated Aluminum Profile, Surface Mount, 78in, Silver Anodized

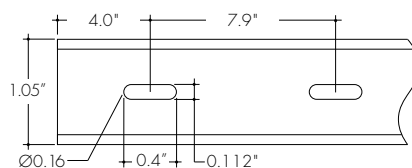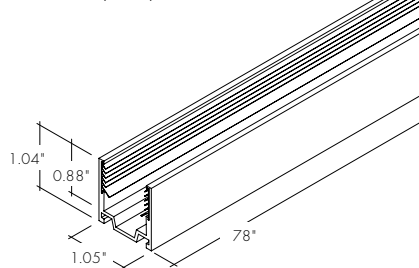

For use with light strip mounted to the ceiling. Includes 10 mounting screws

MC-KBX-FSAP-TR-78-SA


Flanged Mounting Channel with grip, 78"

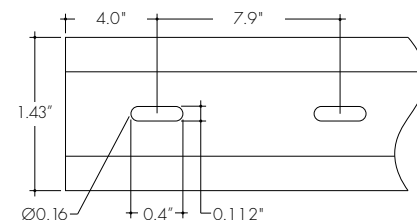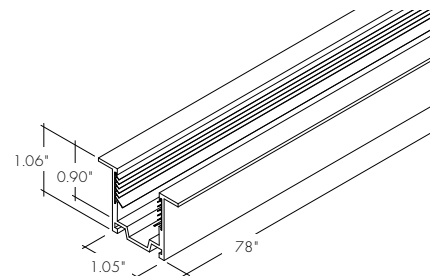

Flanged aluminum mounting channel providing grip. For use with light strip recessed into the ceiling. Includes 10 mounting screws

MC-KBX-BSAP-HB-SM-38-SA

KBX Mounting Channel, Bendable Serrated Aluminum Profile, Horizontal Bending, Surface Mount, 38in, Silver Anodized

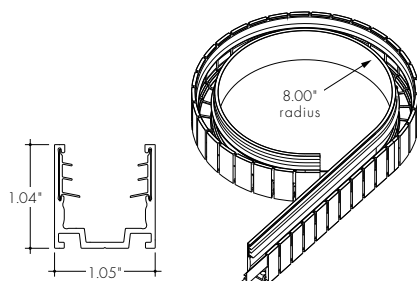


For use with light strip mounted to the ceiling. Mounting Channel Bending Radius is 8.50" in opposite direction. Includes 10 mounting screws

NOTE: For use with **HB** - Horizontal Bend only.


LVSP-WET

Splice box: wet rated, low voltage, gray, IP66



LVSP-WET-CM

Connector for splice box, low voltage for cable management, gray



43SO | Power Consumption Per Fixture Length

Based on operation with PS-UNI series of power supplies. Use Actual Length for Order Code Entry.

Tolerance for Actual Lengths less than 6 ft is $\pm 0.2"$, Actual Lengths between 6 ft and 16 ft is $\pm 0.3"$, and Actual Lengths greater than 16 ft is $\pm 0.6"$


A - End Connector at both ends of Kurba (0.20" + 0.20" added to overall length)

B - End Connector at one end of Kurba and No Connector or Back Connector or Side Connector at other end of Kurba (0.20" + 0.08" added to overall length)


C - Any combination of No Connector, Back Connector, or Side Connector on each end of Kurba (0.08" + 0.08" added to overall length)

Nominal Length (in)	Actual Length (in)				Nominal Length (in)	Actual Length (in)				Nominal Length (in)	Actual Length (in)				Nominal Length (in)	Actual Length (in)			
	W	A	B	C		W	A	B	C		W	A	B	C		W	A	B	C
6	2.6	6.3	6.2	6.1	77	32.4	77.2	77.1	76.9	148	62.1	148.0	147.9	147.8	219	91.8	218.9	218.8	218.7
8	3.5	8.3	8.2	8.0	79	33.2	79.1	79.0	78.9	150	62.9	150.0	149.9	149.8	221	92.6	220.9	220.8	220.6
10	4.3	10.2	10.1	10.0	81	34.0	81.1	81.0	80.9	152	63.7	152.0	151.9	151.7	223	93.4	222.8	222.7	222.6
(1FT) 12	5.1	12.2	12.1	12.0	83	34.8	83.1	83.0	82.8	154	64.5	153.9	153.8	153.7	225	94.2	224.8	224.7	224.6
14	5.9	14.2	14.1	13.9	(7FT) 85	35.7	85.0	84.9	84.8	(13FT) 156	65.4	155.9	155.8	155.7	227	95.1	226.8	226.7	226.5
16	6.8	16.1	16.0	15.9	87	36.5	87.0	86.9	86.8	158	66.2	157.9	157.8	157.6	(19ft) 229	95.9	228.7	228.6	228.5
18	7.6	18.1	18.0	17.9	89	37.3	89.0	88.9	88.7	160	67.0	159.8	159.7	159.6	Note: All values are rounded to the nearest 0.1 inch.				
20	8.4	20.1	20.0	19.8	91	38.1	91.0	90.8	90.7	162	67.8	161.8	161.7	161.6					
22	9.2	22.1	21.9	21.8	93	39.0	92.9	92.8	92.7	164	68.7	163.8	163.7	163.5					
(2FT) 24	10.1	24.0	23.9	23.8	95	39.8	94.9	94.8	94.6	166	69.5	165.8	165.6	165.5					
26	10.9	26.0	25.9	25.8	(8FT) 97	40.6	96.9	96.7	96.6	(14FT) 168	70.3	167.7	167.6	167.5					
28	11.7	28.0	27.8	27.7	99	41.4	98.8	98.7	98.6	170	71.1	169.7	169.6	169.5					
30	12.5	29.9	29.8	29.7	101	42.3	100.8	100.7	100.6	172	72.0	171.7	171.5	171.4					
32	13.4	31.9	31.8	31.7	103	43.1	102.8	102.6	102.5	174	72.8	173.6	173.5	173.4					
34	14.2	33.9	33.7	33.6	105	43.9	104.7	104.6	104.5	176	73.6	175.6	175.5	175.4					
(3FT) 36	15.0	35.8	35.7	35.6	107	44.7	106.7	106.6	106.5	178	74.4	177.6	177.4	177.3					
38	15.8	37.8	37.7	37.6	(9FT) 109	45.6	108.7	108.5	108.4	(15FT) 180	75.3	179.5	179.4	179.3					
40	16.7	39.8	39.7	39.5	110	46.4	110.6	110.5	110.4	182	76.1	181.5	181.4	181.3					
42	17.5	41.7	41.6	41.5	112	47.2	112.6	112.5	112.4	184	76.9	183.5	183.4	183.2					
44	18.3	43.7	43.6	43.5	114	48.0	114.6	114.5	114.3	185	77.7	185.4	185.3	185.2					
46	19.1	45.7	45.6	45.4	116	48.9	116.5	116.4	116.3	187	78.6	187.4	187.3	187.2					
(4FT) 48	20.0	47.6	47.5	47.4	118	49.7	118.5	118.4	118.3	189	79.4	189.4	189.3	189.1					
50	20.8	49.6	49.5	49.4	(10FT) 120	50.5	120.5	120.4	120.2	191	80.2	191.3	191.2	191.1					
52	21.6	51.6	51.5	51.3	122	51.3	122.4	122.3	122.2	(16FT) 193	81.0	193.3	193.2	193.1					
54	22.4	53.5	53.4	53.3	124	52.2	124.4	124.3	124.2	195	81.9	195.3	195.2	195.0					
56	23.3	55.5	55.4	55.3	126	53.0	126.4	126.3	126.1	197	82.7	197.3	197.1	197.0					
57	24.1	57.5	57.4	57.2	128	53.8	128.4	128.2	128.1	199	83.5	199.2	199.1	199.0					
59	24.9	59.5	59.3	59.2	130	54.6	130.3	130.2	130.1	201	84.3	201.2	201.1	200.9					
(5FT) 61	25.7	61.4	61.3	61.2	(11FT) 132	55.5	132.3	132.2	132.0	203	85.2	203.2	203.0	202.9					
63	26.6	63.4	63.3	63.2	134	56.3	134.3	134.1	134.0	(17FT) 205	86.0	205.1	205.0	204.9					
65	27.4	65.4	65.2	65.1	136	57.1	136.2	136.1	136.0	207	86.8	207.1	207.0	206.9					
67	28.2	67.3	67.2	67.1	138	57.9	138.2	138.1	138.0	209	87.6	209.1	208.9	208.8					
69	29.1	69.3	69.2	69.1	140	58.8	140.2	140.0	139.9	211	88.5	211.0	210.9	210.8					
71	29.9	71.3	71.1	71.0	142	59.6	142.1	142.0	141.9	213	89.3	213.0	212.9	212.8					
(6FT) 73	30.7	73.2	73.1	73.0	(12FT) 144	60.4	144.1	144.0	143.9	215	90.1	215.0	214.8	214.7					
75	31.5	75.2	75.1	75.0	146	61.2	146.1	145.9	145.8	(18ft) 217	90.9	216.9	216.8	216.7					


Endcap (No Connector) -NPF




End Connector -IME



Back Connector -IMB



Side Connector -IMSA and -IMSB



44HO | Power Consumption Per Fixture Length

Based on operation with PS-UNI series of power supplies. Use Actual Length for Order Code Entry.

Tolerance for Actual Lengths less than 6 ft is $\pm 0.2"$, Actual Lengths between 6 ft and 16 ft is $\pm 0.3"$, and Actual Lengths greater than 16 ft is $\pm 0.6"$

A - End Connector at both ends of Kurba (0.20" + 0.20" added to overall length)

B - End Connector at one end of Kurba and No Connector or Back Connector or Side Connector at other end of Kurba (0.20" + 0.08" added to overall length)

C - Any combination of No Connector, Back Connector, or Side Connector on each end of Kurba (0.08" + 0.08" added to overall length)





Nominal Length (in)	Actual Length (in)				Nominal Length (in)	Actual Length (in)				Nominal Length (in)	Actual Length (in)			
	W	A	B	C		W	A	B	C		W	A	B	C
7	2.9	7.0	6.8	6.7	86	35.9	85.7	85.6	85.5	165	68.9	164.5	164.3	164.2
9	3.8	9.1	9.0	8.9	88	36.8	87.9	87.8	87.7	167	69.9	166.6	166.5	166.4
(1 ft) 11	4.8	11.3	11.2	11.1	90	37.8	90.1	90.0	89.8	(14 ft) 169	70.8	168.8	168.7	168.6
14	5.7	13.5	13.4	13.3	92	38.7	92.3	92.2	92.0	171	71.7	171.0	170.9	170.8
16	6.6	15.7	15.6	15.5	95	39.6	94.5	94.3	94.2	173	72.6	173.2	173.1	173.0
18	7.5	17.9	17.8	17.7	(8 ft) 97	40.5	96.6	96.5	96.4	176	73.5	175.4	175.3	175.2
20	8.4	20.1	20.0	19.8	99	41.4	98.8	98.7	98.6	178	74.4	177.6	177.5	177.3
22	9.3	22.3	22.2	22.0	101	42.3	101.0	100.9	100.8	(15 ft) 180	75.4	179.8	179.6	179.5
(2 ft) 24	10.3	24.5	24.3	24.2	103	43.3	103.2	103.1	103.0	182	76.3	182.0	181.8	181.7
27	11.2	26.6	26.5	26.4	106	44.2	105.4	105.3	105.2	184	77.2	184.1	184.0	183.9
29	12.1	28.8	28.7	28.6	(9 ft) 108	45.1	107.6	107.5	107.3	187	78.1	186.3	186.2	186.1
31	13.0	31.0	30.9	30.8	110	46.0	109.8	109.7	109.5	189	79.0	188.5	188.4	188.3
33	13.9	33.2	33.1	33.0	112	46.9	112.0	111.8	111.7	(16 ft) 191	79.9	190.7	190.6	190.5
(3 ft) 35	14.8	35.4	35.3	35.2	114	47.9	114.1	114.0	113.9	193	80.9	192.9	192.8	192.7
38	15.8	37.6	37.5	37.3	116	48.8	116.3	116.2	116.1	195	81.8	195.1	195.0	194.8
40	16.7	39.8	39.7	39.5	119	49.7	118.5	118.4	118.3	198	82.7	197.3	197.1	197.0
42	17.6	42.0	41.8	41.7	(10 ft) 121	50.6	120.7	120.6	120.5	200	83.6	199.5	199.3	199.2
44	18.5	44.1	44.0	43.9	123	51.5	122.9	122.8	122.7	202	84.5	201.6	201.5	201.4
46	19.4	46.3	46.2	46.1	125	52.4	125.1	125.0	124.8	(17 ft) 204	85.4	203.8	203.7	203.6
(4 ft) 49	20.3	48.5	48.4	48.3	127	53.4	127.3	127.1	127.0	206	86.4	206.0	205.9	205.8
51	21.3	50.7	50.6	50.5	130	54.3	129.5	129.3	129.2	208	87.3	208.2	208.1	208.0
53	22.2	52.9	52.8	52.7	(11 ft) 132	55.2	131.6	131.5	131.4	211	88.2	210.4	210.3	210.2
55	23.1	55.1	55.0	54.8	134	56.1	133.8	133.7	133.6	213	89.1	212.6	212.5	212.3
57	24.0	57.3	57.2	57.0	136	57.0	136.0	135.9	135.8	(18 ft) 215	90.0	214.8	214.6	214.5
(5 ft) 60	24.9	59.5	59.3	59.2	138	57.9	138.2	138.1	138.0	217	90.9	217.0	216.8	216.7
62	25.8	61.6	61.5	61.4	141	58.9	140.4	140.3	140.2	219	91.9	219.1	219.0	218.9
64	26.8	63.8	63.7	63.6	143	59.8	142.6	142.5	142.3	222	92.8	221.3	221.2	221.1
66	27.7	66.0	65.9	65.8	(12 ft) 145	60.7	144.8	144.6	144.5	224	93.7	223.5	223.4	223.3
68	28.6	68.2	68.1	68.0	147	61.6	147.0	146.8	146.7	226	94.6	225.7	225.6	225.5
70	29.5	70.4	70.3	70.2	149	62.5	149.1	149.0	148.9	(19 ft) 228	95.5	227.9	227.8	227.6
(6 ft) 73	30.4	72.6	72.5	72.3	152	63.4	151.3	151.2	151.1	Note: All values are rounded to the nearest 0.1 inch.				
75	31.3	74.8	74.7	74.5	154	64.4	153.5	153.4	153.3					
77	32.3	77.0	76.8	76.7	(13 ft) 156	65.3	155.7	155.6	155.5					
80	33.2	79.1	79.0	78.9	158	66.2	157.9	157.8	157.7					
81	34.1	81.3	81.2	81.1	160	67.1	160.1	160.0	159.8					
(7 ft) 84	35.0	83.5	83.4	83.3	162	68.0	162.3	162.1	162.0					

Endcap (No Connector) -NPF

End Connector -IME

Back Connector -IMB

Side Connector -IMSA and -IMSB



Power Supplies

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

For use with Static White



Ordering Code Universal Dimming Power Supplies 1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS-Power Supply, 120-277VAC	UNI-0-10V Dimming, Phase Dimming	W-Wet	30-30 Watts 60-60 Watts 96-96 Watts 3x96-3x96 Watts	24-24 VDC

Compatibility: View a complete list of compatible dimmers on product page ([Link](#))

0-10V - 1% dimming
MLV/ELV/TRIAC - 1% dimming, consult dimming compatibility chart

MODELS	PS-UNI-W-30W	PS-UNI-W-60W	PS-UNI-W-96W	PS-UNI-W-3X96W
Length	6.50"	7.40"	8.66"	11.85"
Width	3.73"	3.73"	3.73"	4.32"
Depth	1.61"	1.61"	1.61"	1.81"

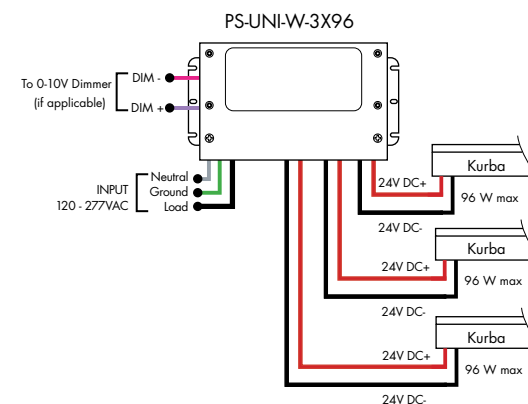
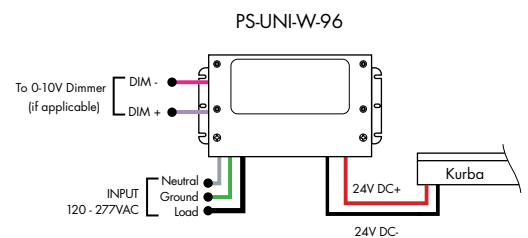


For use with Static White

0-10V Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	POWER	OUTPUT	INPUT CONTROL	ENVIRONMENT
PS-Power Supply, 120-277VAC	96-96 Watts 3x96-3x96 Watts	24-24 VDC	010V-LIN-0-10V Dimming (0.1%), Linear 010V-LOG-0-10V Dimming (0.1%), Logarithmic	D-Dry

MODELS	96W	3X96
Length	14.40"	15.00"
Width	5.20"	6.62"
Depth	2.60"	4.45"

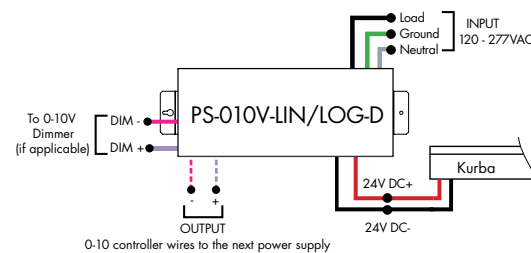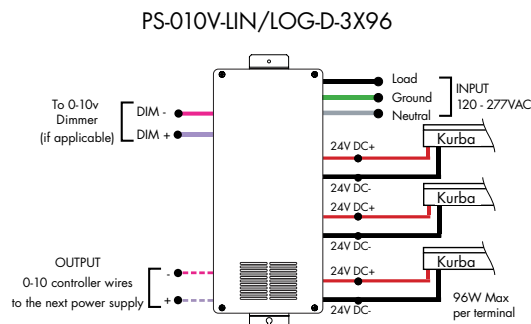

Power Supplies


See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

For use with Static White

Athena 0-10V LED Driver

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT	FEATURE
PS-Power Supply, 120-277VAC	010V-LIN-0-10V Dimming (0.1%), Linear 010V-LOG-0-10V Dimming (0.1%), Logarithmic	D-Dry	96-96 Watts	24-24 VDC	AWNDR-Athena

MODELS	96W
Length	14.40"
Width	5.20"
Depth	2.60"

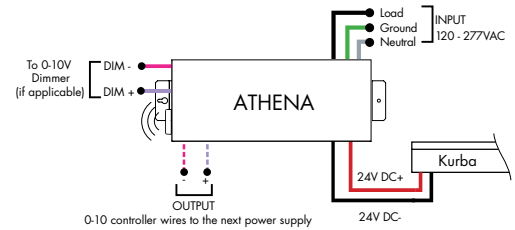


For use with Static White

Ordering Code Phase Dimming Power Supply 1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT	OUTPUT CONTROL
PS-Power Supply, 120-277VAC	PH-Phase Dimming (Triac, ELV, MLV)	D-Dry	96-96 Watts	24-24 VDC	DC-Direct Current

MLV/ELV/TRIAC - 1% dimming, consult dimming compatibility chart ([link](#))

MODELS	96W
Length	8.25"
Width	4.10"
Depth	1.56"


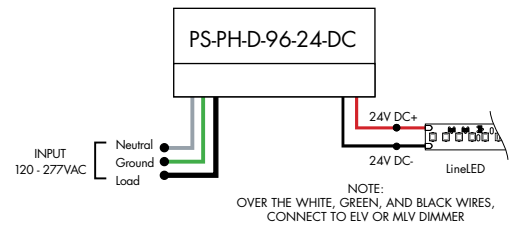


For use with Static White

DALI Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS-Power Supply, 120-277VAC	DALI-DALI (0.1%)	D-Dry	96-96 Watts 3x96-3x96 Watts	24-24 VDC

Model	96W	3X96
Length	14.40"	15.00"
Width	5.20"	6.62"
Depth	2.60"	4.56"

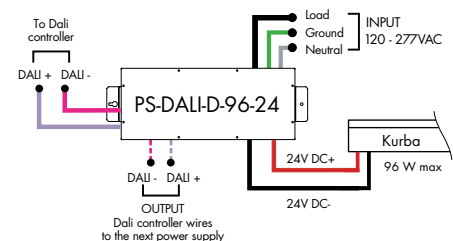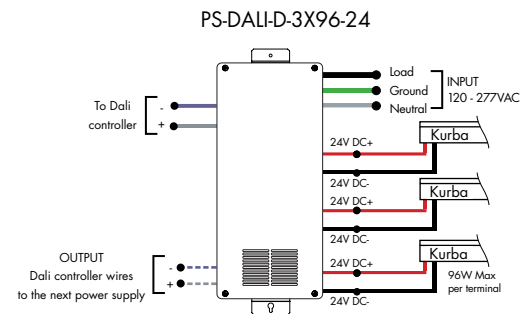

Power Supplies


See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

For use with Static White

Athena 0-10V LED Driver

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT	FEATURE
PS-Power Supply, 120-277VAC	010V-0-10V Dimming (1%)	D-Dry	96-96 Watts	24-24 VDC	ENL-0-10V Enlightened

Model	96W
Length	14.40"
Width	5.20"
Depth	2.60"

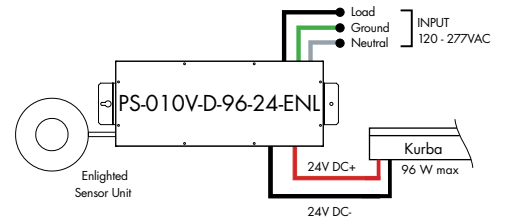



For use with Static White

Requires Zonal Control

DMX Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS-Power Supply, 120-277VAC	DMX-DMX (0.1%)	D-Dry	96-96 Watts 3x96-3x96 Watts	24-24 VDC

MODELS	96W	3X96
Length	14.40"	15.00"
Width	5.20"	6.62"
Depth	2.60"	4.56"

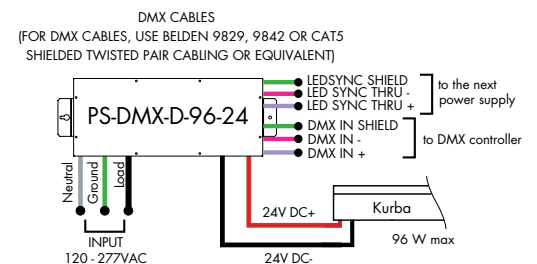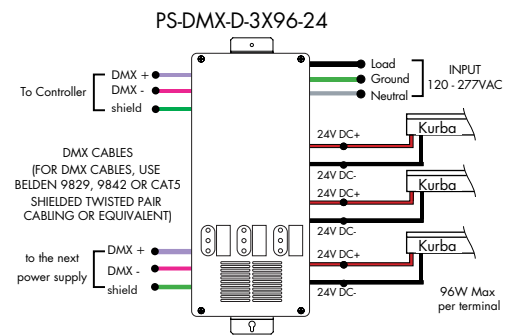

For use with Static White

DMX Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS-Power Supply, 120-277VAC	ND-Non Dimming	D-Dry	96-96 Watts	24-24 VDC

MODELS	96W
Length	14.40"
Width	5.20"
Depth	2.60"



Power Supplies

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.


For use with Static White

In-Ground Power Supplies

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS120-Power Supply, 120VAC PS240-Power Supply, 240VAC PS277-Power Supply, 277VAC	ELV-ELV Dimming (1%)	IG-In Ground	2X96-2X96 Watts	24-24 VDC

MODELS 2X96W

Length	8.40"
Width	8.30"
Depth	8.10"

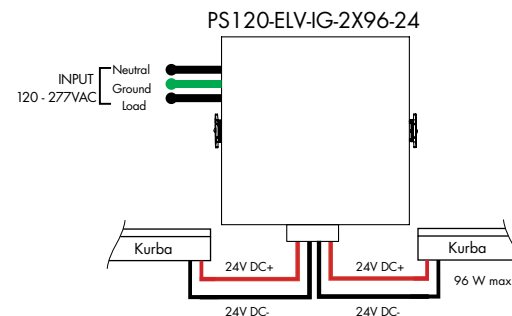

Luminii is a Lutron OEM Advantage Partner

Lutron Power Supplies 1%


MODEL

L3DA4U1UKL-CV240

HiLume™ 1% EcoSystem Voltage LED driver
40W max

MODELS L3DA4U1UKL-CV240

Length	4.98"
Width	4.00"
Depth	2.62"

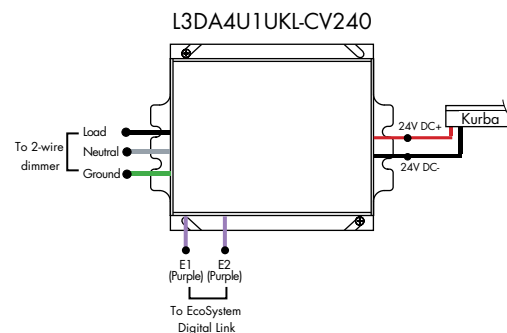

Luminii is a Lutron OEM Advantage Partner

Lutron Power Supplies 0.1%

MODEL

L3D0-96W24V-U

HiLume™ 0.1% EcoSystem Voltage LED Driver with Soft-On, Fade-to-Black™
96W max

MODELS L3D0

Length	10.50"
Width	5.50"
Depth	2.00"

