


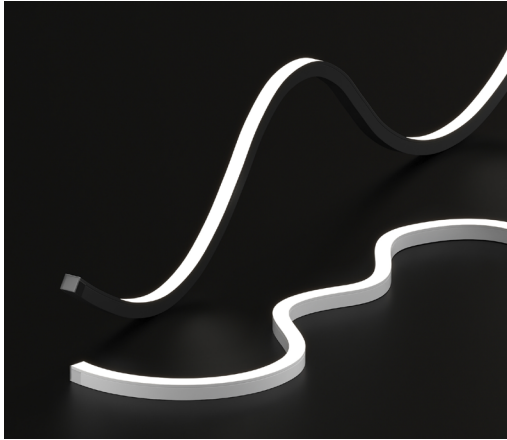

Features

Kurba Small is a direct view, small profile, energy efficient and flexible LED strip suitable for outdoor wet locations capable of horizontal/side bends and vertical/top bends with a 2" bending radius. The silicone material offers excellent heat, weather, UV, and solvent resistance and has a special coating to repel dust and dirt accumulation.

Applications

Indoor/Outdoor dry & wet location

Materials

Silicone for red list approved, as well as heat, weather, UV, and solvent resistance

Dimming

Dot Free even illumination. Also available with Black Lens

Average Life (L70)


50,000 Hours

Approvals

24VDC Class 2 wet listed, IP67

Warranty

5 years



Finish Options (see page 2 for additional information)

Base ☐ White

Premium ☒ Black



Technical Information

Bending Direction	Horizontal			Vertical		
Output	44SO	44HO	51SO (Black Lens Only)	44SO	44HO	51SO (Black Lens Only)
Light Output at 3000K, 80 CRI	85 lm/ft	163 lm/ft	6 lm/ft	96 lm/ft	180 lm/ft	7 lm/ft
Average Power Consumption at 4'	1.37 W/ft	2.74 W/ft	1.37 W/ft	1.37 W/ft	2.74 W/ft	1.37 W/ft
Efficacy	62 lm/W	59 lm/W	4 lm/W	70 lm/W	66 lm/W	5 lm/W
Ordering Increment	3.28"		1.64"	3.28"		1.41"
Maximum Run Length (In Series)	49'	24'	49'	49'	24'	49'
Operating Temperature	-40°F to 149°F	-40°F to 131°F	-40°F to 149°F	-40°F to 149°F	-40°F to 131°F	-40°F to 149°F

CCT INFO / LUMEN MULTIPLIER (ref. - 3000K)

Bending Direction	Horizontal		Vertical	
CRI	80 CRI	90 CRI	80 CRI	90 CRI
2200K	0.86	0.67	0.85	0.66
2400K	0.92	0.74	0.93	0.72
2700K	0.99	0.82	0.98	0.74
3000K	1.00	0.80	1.00	0.80
3500K	1.01	0.82	1.01	0.82
4000K	0.98	0.84	0.98	0.82

Ordering Code


MODEL	BEND DIRECTION	LENGTH	OUTPUT ¹	CCT ²	CRI	LENS	MOUNTING	FINISH	FEED POSITION LEFT	FEED POSITION RIGHT
KBS-W - Kurba Small Wet	HB - Horizontal Bending VB - Vertical Bending	SEE PCC CHART ON PAGES 6 AND 8	44SO - Standard 44HO - High	22K - 2200K 24K - 2400K 27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K	R80 - 80CRI R90 - 90CRI	SF - Silicone Frosted	NA - See Page 4 for orderable mounting accessories	WH - V-White	INJECTION MOLD IME - End Feed 1 IMB - Back Feed 1 IMSA - Side A Feed IMSB - Side B Feed ³ NPF - No Power Feed ³	INJECTION MOLD IME - End Feed 1 IMB - Back Feed 1 IMSA - Side A Feed IMSB - Side B Feed ³ NPF - No Power Feed ³
BLACK LENS										
			51SO - Standard	26K - 2600K 42K - 4200K	R80 - 80CRI	BL - Black Lens	NA - See Page 4 for orderable mounting accessories	BK - Black ⁴	Feeds come with 118" wire leads	

1 - Title 24 JA8 compliance achievable, contact factory for specific requests
2 - IMSB - Side B Feed not available with HB - Horizontal Bending

3 - NPF-NPF for Feed Position 1&2 is not a valid configuration option
4 - BK - Black finish has an MOQ of 350ft. Additional costs will be incurred for orders under 350ft


Powerfeeds and Connectors

Power Feed Position Options and Orientation

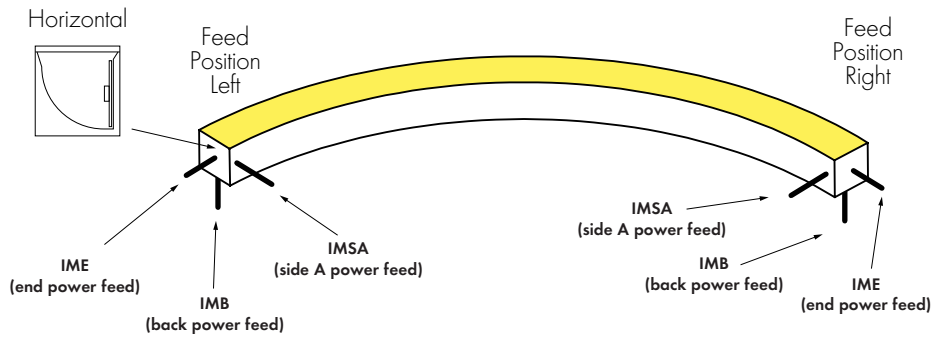


NOTE: IMSB - Side B Feed not available with HB - Horizontal Bending

Horizontal Bend Direction

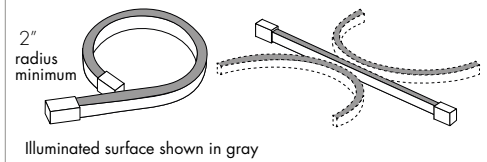

Horizontal Prohibited Bends


Twisting or bending LED in these positions will cause damage



Illuminated surface shown in gray
Do not make sharp bends near the endcap


Vertical Bend Direction

Bend LED in these positions only to avoid damage

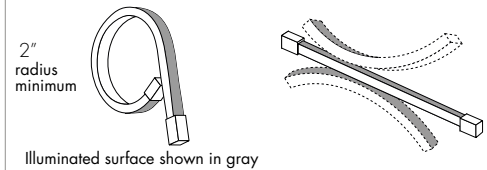


Vertical Prohibited Bends

Twisting or bending LED in these positions will cause damage




Illuminated surface shown in gray
Do not make sharp bends near the endcap

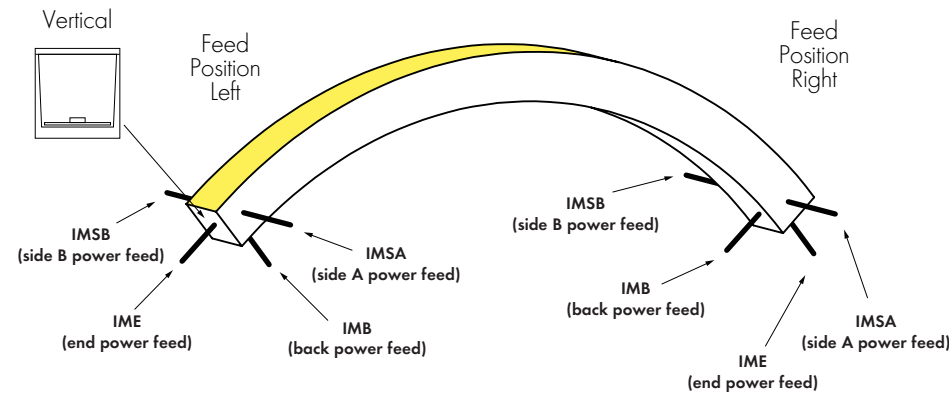

Linking and Extension Cable Options


END CONNECTOR

Injection-molded End Connector
-IME

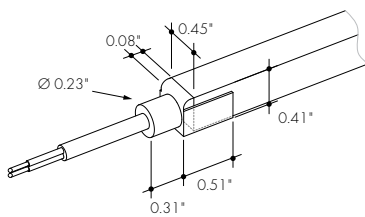


BACK CONNECTOR

Injection-molded Back Connector
-IMB




SIDE CONNECTOR

Injection-molded Side Connector
-IMSA and -IMSB




ENDCAP (NO CONNECTOR)

Injection-molded Cap (No Connector)
-NPF




ANTI-WICKING FERRULE

Included on every power feed wire



POWER FEED OPTIONS



Feeds come with 118" wire leads



Please note, Power Feed Finish will match Kurba Fixture Finish

Product Dimensions


Kurba Small Cross Sections



Example Feed Position

IME - NPF


End Feed 1 to
No Power Feed



Example Feed Position

IMSA - NPF


Side A Feed to
No Power Feed



Example Feed Position

IMB - NPF






Back Feed 1 to
No Power Feed



Example Feed Position

IME - IME


End Feed 1 and
End Feed 1

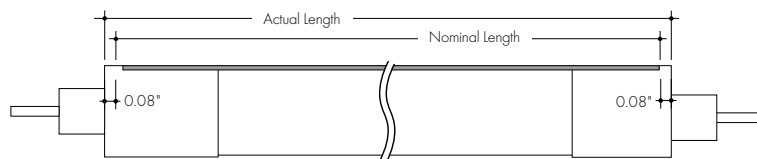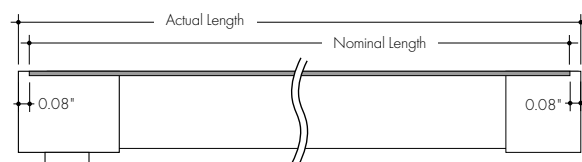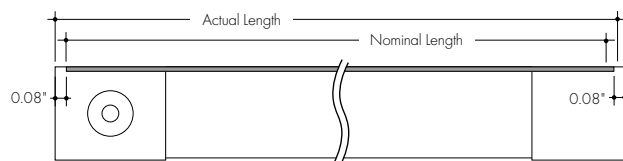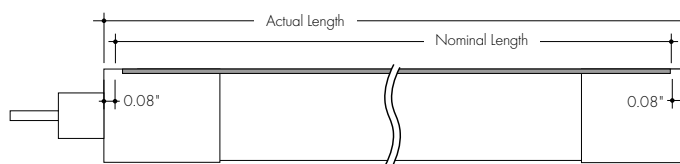


Finish Options

- Kurba's base finish is a crisp white which brings a timeless, clean aesthetic that brightens and enhances any space.
- Also available with a blackout aesthetic - the Black Lens paired with the Black Finish provides for a sleek, all black profile that keeps the strip concealed in the off-state.

**White
Base**



**Black Finish w/ Black Lens
Premium**



Light Transmission and Dotting

Output Options	Lens/Finish	
	Silicone Frosted/ White Finish	Black Lens/ Black Finish
44SO	ND	N/A
44HO	ND	N/A
51SO	N/A	ND
Transmission Percentage	100%	7%




CD SD ND
 CD - Clear Dotting
 SD - Slight Dotting
 ND - No Dotting

Mounting Accessories & Optional Connectors

MC-KBS-SAP-SM-0.8-SA


KBS Mounting Channel, Serrated Aluminum Profile, Surface Mount, 0.8in, Silver Anodized

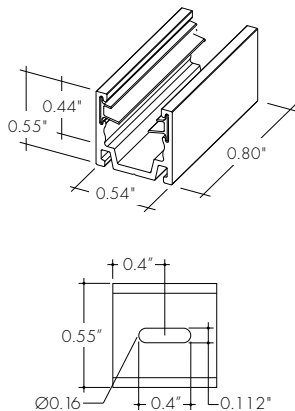

For use with light strip mounted to the ceiling. 1 recommended every 8 in. Includes 1 mounting screw

MC-KBS-SAP-SM-78-SA


KBS Mounting Channel, Serrated Aluminum Profile, Surface Mount, 78in, Silver Anodized

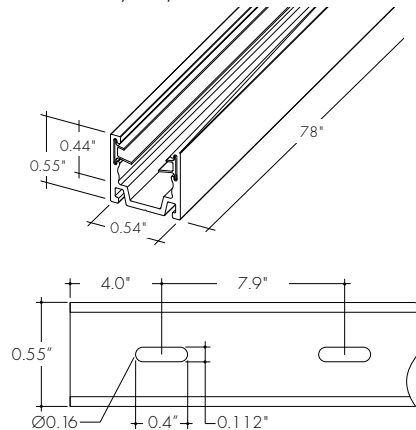

For use with light strip mounted to the ceiling. Includes 10 mounting screws

MC-KBS-FSAP-TR-78-SA


KBS Mounting Channel, Flanged Serrated Aluminum Profile, Trimmed Recessed Mount, 78in, Silver Anodized

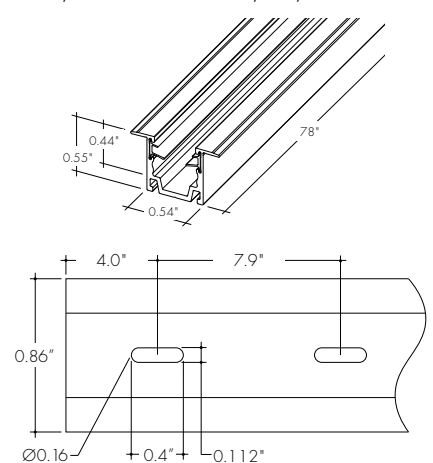

Flanged aluminum mounting channel providing grip. For use with light strip recessed into the ceiling. Includes 10 mounting screws

MC-KBS-BSAP-HB-SM-38-SA

KBS Mounting Channel, Bendable Serrated Aluminum Profile, Horizontal Bending, Surface Mount, 38in, Silver Anodized

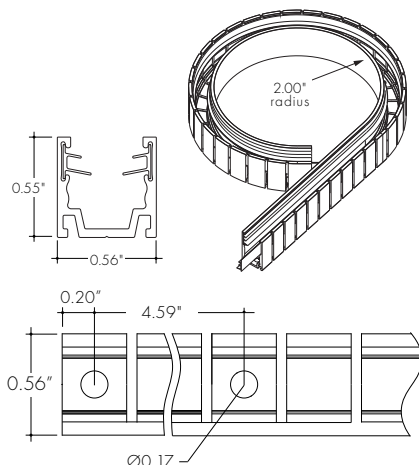


For use with light strip mounted to the ceiling. Mounting Channel Bending Radius is 4.00" in opposite direction. Includes 10 mounting screws

NOTE: For use with HB - Horizontal Bend only.

MC-KBS-BANP-3D-SM-39-XX

KBS Mounting Channel, Bendable Silicone Profile, 3D Bending, Surface Mount, 39", 6" bending radius

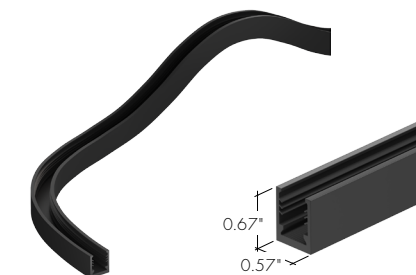


Includes 12 mounting screws

XX	Color
WH	White
BK	Black


LVSP-WET

Splice box: wet rated, low voltage, gray, IP66




LVSP-WET-CM

Connector for splice box, low voltage for cable management, gray




Photometry

KBS-W-HB-48-44HO-30K-R80-SF-NA-WH
Kurba Small, Horizontal Bend, 4ft, 3000K, 80 CRI, 44HO, Silicone Frosted Lens

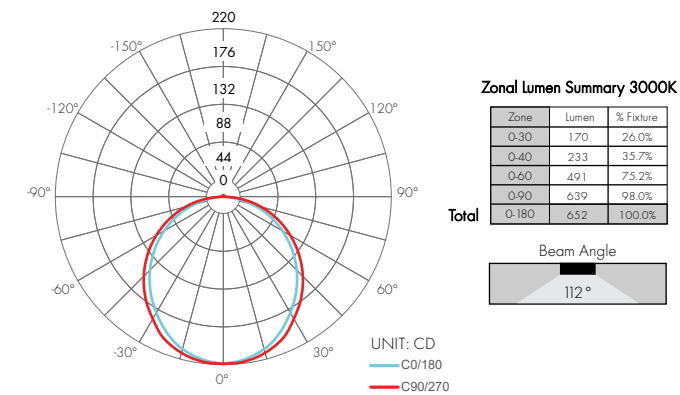

KBS-W-VB-48-44HO-30K-R80-SF-NA-WH
Kurba Small, Vertical Bend, 4ft, 3000K, 80 CRI, 44HO, Silicone Frosted Lens

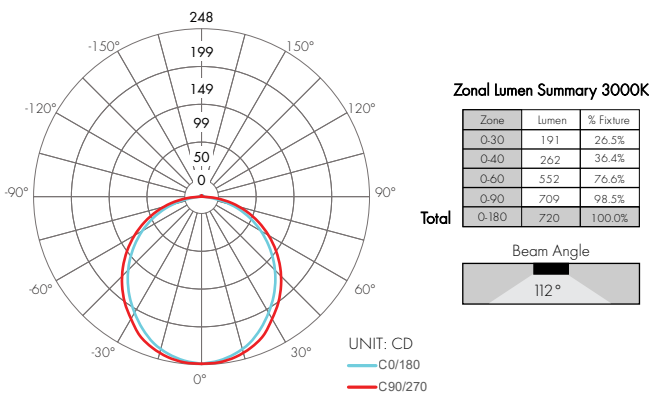


44SO | Power Consumption Per Fixture Length

Based on operation with PS-UNI series of power supplies. Use Actual Length for Order Code Entry


Tolerance for Actual Lengths less than 6 ft is $\pm 0.2"$, Actual Lengths between 6 ft and 16 ft is $\pm 0.3"$, and Actual Lengths greater than 16 ft is $\pm 0.6"$

Nominal Length (in)	W	Actual Length (in)	Nominal Length (in)	W	Actual Length (in)	Nominal Length (in)	W	Actual Length (in)	Nominal Length (in)	W	Actual Length (in)	Nominal Length (in)	W	Actual Length (in)
7	0.8	6.7	125	14.3	124.8	243	27.8	242.9	(30 ft) 361	41.3	361.0	(40 ft) 479	54.8	479.1
10	1.1	10.0	128	14.6	128.1	246	28.1	246.2	365	41.7	364.3	483	55.2	482.4
(1 ft) 14	1.5	13.3	(11 ft) 132	15.0	131.4	250	28.5	249.5	368	42.0	367.6	486	55.5	485.7
17	1.9	16.6	135	15.4	134.7	(21 ft) 253	28.9	252.8	(31 ft) 371	42.4	370.9	489	55.9	489.0
20	2.3	19.8	138	15.8	137.9	256	29.3	256.1	374	42.8	374.2	(41 ft) 493	56.3	492.3
(2 ft) 23	2.6	23.1	141	16.1	141.2	260	29.6	259.3	378	43.2	377.4	496	56.7	495.5
27	3.0	26.4	(12 ft) 145	16.5	144.5	(22 ft) 263	30.0	262.6	381	43.5	380.7	499	57.0	498.8
30	3.4	29.7	148	16.9	147.8	266	30.4	265.9	(32 ft) 384	43.9	384.0	502	57.4	502.1
33	3.8	33.0	151	17.3	151.1	269	30.8	269.2	388	44.3	387.3	(42 ft) 506	57.8	505.4
(3 ft) 36	4.1	36.2	(13 ft) 155	17.6	154.4	273	31.2	272.5	391	44.7	390.6	509	58.2	508.7
40	4.5	39.5	158	18.0	157.6	(23 ft) 276	31.5	275.7	394	45.0	393.8	512	58.5	512.0
43	4.9	42.8	161	18.4	160.9	279	31.9	279.0	(33 ft) 397	45.4	397.1	(43 ft) 515	58.9	515.2
46	5.3	46.1	164	18.8	164.2	282	32.3	282.3	401	45.8	400.4	519	59.3	518.5
(4 ft) 50	5.6	49.4	(14 ft) 168	19.1	167.5	286	32.7	285.6	404	46.2	403.7	522	59.7	521.8
53	6.0	52.7	171	19.5	170.8	(24 ft) 289	33.0	288.9	(34 ft) 407	46.5	407.0	525	60.0	525.1
56	6.4	55.9	174	19.9	174.0	292	33.4	292.1	410	46.9	410.2	(44 ft) 529	60.4	528.4
(5 ft) 59	6.8	59.2	178	20.3	177.3	296	33.8	295.4	414	47.3	413.5	532	60.8	531.6
63	7.1	62.5	(15 ft) 181	20.6	180.6	(25 ft) 299	34.2	298.7	417	47.7	416.8	535	61.2	534.9
66	7.5	65.8	184	21.0	183.9	302	34.5	302.0	(35 ft) 420	48.0	420.1	(45 ft) 538	61.5	538.2
69	7.9	69.1	187	21.4	187.2	305	34.9	305.3	424	48.4	423.4	542	61.9	541.5
(6 ft) 73	8.3	72.3	(16 ft) 191	21.8	190.4	309	35.3	308.5	427	48.8	426.7	545	62.3	544.8
76	8.6	75.6	194	22.1	193.7	(26 ft) 312	35.7	311.8	430	49.2	429.9	548	62.7	548.0
79	9.0	78.9	197	22.5	197.0	315	36.0	315.1	(36 ft) 433	49.5	433.2	(46 ft) 552	63.0	551.3
(7 ft) 82	9.4	82.2	200	22.9	200.3	319	36.4	318.4	437	49.9	436.5	555	63.4	554.6
86	9.8	85.5	(17 ft) 204	23.3	203.6	322	36.8	321.7	440	50.3	439.8	558	63.8	557.9
89	10.1	88.7	207	23.6	206.8	(27 ft) 325	37.2	325.0	(37 ft) 443	50.7	443.1	561	64.2	561.2
92	10.5	92.0	210	24.0	210.1	328	37.5	328.2	447	51.0	446.3	(47 ft) 565	64.5	564.4
(8 ft) 96	10.9	95.3	214	24.4	213.4	332	37.9	331.5	450	51.4	449.6	568	64.9	567.7
99	11.3	98.6	(18 ft) 217	24.8	216.7	(28 ft) 335	38.3	334.8	453	51.8	452.9	571	65.3	571.0
102	11.6	101.9	220	25.1	220.0	338	38.7	338.1	(38 ft) 456	52.2	456.2	(48 ft) 575	65.7	574.3
105	12.0	105.1	223	25.5	223.2	342	39.0	341.4	460	52.5	459.5	578	66.0	577.6
(9 ft) 109	12.4	108.4	(19 ft) 227	25.9	226.5	345	39.4	344.6	463	52.9	462.7	581	66.4	580.8
112	12.8	111.7	230	26.3	229.8	(29 ft) 348	39.8	347.9	466	53.3	466.0	584	66.8	584.1
115	13.1	115.0	233	26.6	233.1	351	40.2	351.2	(39 ft) 470	53.7	469.3	(49 ft) 588	67.2	587.4
(10 ft) 118	13.5	118.3	237	27.0	236.4	355	40.5	354.5	473	54.0	472.6	591	67.5	590.7
122	13.9	121.5	(20 ft) 240	27.4	239.7	358	40.9	357.8	476	54.4	475.9	Note: all values are rounded to the nearest 0.1 inch		


Endcap (No Connector) -NPF




End Connector -IME



Back Connector -IMB



Side Connector -IMSA and -IMSB



44HO | Power Consumption Per Fixture Length


Based on operation with PS-UNI series of power supplies. Use Actual Length for Order Code Entry

Tolerance for Actual Lengths less than 6 ft is $\pm 0.2"$, Actual Lengths between 6 ft and 16 ft is $\pm 0.3"$, and Actual Lengths greater than 16 ft is $\pm 0.6"$


Nominal Length (in)	W	Actual Length (in)	Nominal Length (in)	W	Actual Length (in)	Nominal Length (in)	W	Actual Length (in)
7	1.5	6.7	125	28.5	124.8	243	55.5	242.9
10	2.3	10.0	128	29.3	128.1	246	56.3	246.2
(1 ft) 14	3.0	13.3	(11 ft) 132	30.0	131.4	250	57.0	249.5
17	3.8	16.6	135	30.8	134.7	(21 ft) 253	57.8	252.8
20	4.5	19.8	138	31.5	137.9	256	58.5	256.1
(2 ft) 23	5.3	23.1	141	32.3	141.2	260	59.3	259.3
27	6.0	26.4	(12 ft) 145	33.0	144.5	(22 ft) 263	60.0	262.6
30	6.8	29.7	148	33.8	147.8	266	60.8	265.9
33	7.5	33.0	151	34.5	151.1	269	61.5	269.2
(3 ft) 36	8.3	36.2	(13 ft) 155	35.3	154.4	273	62.3	272.5
40	9.0	39.5	158	36.0	157.6	(23 ft) 276	63.1	275.7
43	9.8	42.8	161	36.8	160.9	279	63.8	279.0
46	10.5	46.1	164	37.5	164.2	282	64.6	282.3
(4 ft) 50	11.3	49.4	(14 ft) 168	38.3	167.5	286	65.3	285.6
53	12.0	52.7	171	39.0	170.8	(24 ft) 289	66.1	288.9
56	12.8	55.9	174	39.8	174.0	292	66.8	292.1
(5 ft) 59	13.5	59.2	178	40.5	177.3	296	67.6	295.4
63	14.3	62.5	(15 ft) 181	41.3	180.6	Note: all values are rounded to the nearest 0.1 inch		
66	15.0	65.8	184	42.0	183.9			
69	15.8	69.1	187	42.8	187.2			
(6 ft) 73	16.5	72.3	(16 ft) 191	43.5	190.4			
76	17.3	75.6	194	44.3	193.7			
79	18.0	78.9	197	45.0	197.0			
(7 ft) 82	18.8	82.2	200	45.8	200.3			
86	19.5	85.5	(17 ft) 204	46.5	203.6			
89	20.3	88.7	207	47.3	206.8			
92	21.0	92.0	210	48.0	210.1			
(8 ft) 96	21.8	95.3	214	48.8	213.4			
99	22.5	98.6	(18 ft) 217	49.5	216.7			
102	23.3	101.9	220	50.3	220.0			
105	24.0	105.1	223	51.0	223.2			
(9 ft) 109	24.8	108.4	(19 ft) 227	51.8	226.5			
112	25.5	111.7	230	52.5	229.8			
115	26.3	115.0	233	53.3	233.1			
(10 ft) 118	27.0	118.3	237	54.0	236.4			
122	27.8	121.5	(20 ft) 240	54.8	239.7			

Note: all values are rounded to the nearest 0.1 inch


Endcap (No Connector) -NPF




End Connector -IME



Back Connector -IMB



Side Connector -IMSA and -IMSB



5150 | Power Consumption Per Fixture Length


Based on operation with PS-UNI series of power supplies. Use Actual Length for Order Code Entry

Tolerance for Actual Lengths less than 6 ft is $\pm 0.2"$, Actual Lengths between 6 ft and 16 ft is $\pm 0.3"$, and Actual Lengths greater than 16 ft is $\pm 0.6"$


Nominal Length (in)	W	Actual Length (in)	Nominal Length (in)	W	Actual Length (in)	Nominal Length (in)	W	Actual Length (in)	Nominal Length (in)	W	Actual Length (in)	Nominal Length (in)	W	Actual Length (in)
8	1.0	8.4	67	7.7	67.4	126	14.5	126.5	185	21.2	185.5	244	28.0	244.6
10	1.1	10.0	69	7.9	69.1	128	14.6	128.1	187	21.4	187.2	246	28.2	246.2
(1FT) 12	1.3	11.6	71	8.1	70.7	130	14.8	129.8	189	21.6	188.8	248	28.3	247.9
13	1.5	13.3	(6FT) 72	8.3	72.3	131	15.0	131.4	190	21.8	190.5	249	28.5	249.5
15	1.7	14.9	74	8.5	74.0	(11FT) 133	15.2	133.0	(16FT) 192	22.0	192.1	251	28.7	251.2
17	1.9	16.6	76	8.6	75.6	135	15.4	134.7	194	22.2	193.7	(21FT) 253	28.9	252.8
18	2.1	18.2	77	8.8	77.3	137	15.6	136.3	195	22.3	195.4	254	29.1	254.4
20	2.3	19.8	79	9.0	78.9	138	15.8	138.0	197	22.5	197.0	256	29.3	256.1
22	2.5	21.5	80	9.2	80.5	139	16.0	139.6	199	22.7	198.7	258	29.5	257.7
23	2.6	23.1	82	9.4	82.2	141	16.1	141.2	200	22.9	200.3	259	29.7	259.4
(2FT) 25	2.8	24.8	(7FT) 84	9.6	83.8	143	16.3	142.9	202	23.1	201.9	261	29.8	261.0
26	3.0	26.4	85	9.8	85.5	(12FT) 144	16.5	144.5	(17FT) 203	23.3	203.6	263	30.0	262.6
28	3.2	28.0	87	10.0	87.1	146	16.7	146.2	205	23.5	205.2	(22FT) 264	30.2	264.3
30	3.4	29.7	89	10.1	88.7	148	16.9	147.8	207	23.7	206.9	266	30.4	265.9
32	3.6	31.3	90	10.3	90.4	149	17.1	149.5	208	23.8	208.5	267	30.6	267.6
33	3.8	33.0	92	10.5	92.0	151	17.3	151.1	210	24.0	210.2	269	30.8	269.2
35	4.0	34.6	94	10.7	93.7	153	17.5	152.7	212	24.2	211.8	271	31.0	270.9
(3FT) 36	4.1	36.3	95	10.9	95.3	154	17.6	154.4	213	24.4	213.4	272	31.2	272.5
38	4.3	37.9	(8FT) 97	11.1	97.0	(13FT) 156	17.8	156.0	215	24.6	215.1	274	31.3	274.1
39	4.5	39.5	98	11.3	98.6	158	18.0	157.7	(18FT) 217	24.8	216.7	(23FT) 276	31.5	275.8
41	4.7	41.2	100	11.5	100.2	159	18.2	159.3	218	25.0	218.4	277	31.7	277.4
43	4.9	42.8	102	11.6	101.9	161	18.4	160.9	220	25.2	220.0	279	31.9	279.1
44	5.1	44.5	103	11.8	103.5	162	18.6	162.6	222	25.3	221.6	281	32.1	280.7
46	5.3	46.1	105	12.0	105.2	164	18.8	164.2	223	25.5	223.3	282	32.3	282.3
(4FT) 48	5.5	47.7	107	12.2	106.8	166	19.0	165.9	225	25.7	224.9	284	32.5	284.0
49	5.6	49.4	(9FT) 108	12.4	108.4	(14FT) 167	19.1	167.5	226	25.9	226.6	286	32.7	285.6
51	5.8	51.0	110	12.6	110.1	169	19.3	169.1	(19FT) 228	26.1	228.2	287	32.8	287.3
53	6.0	52.7	112	12.8	111.7	171	19.5	170.8	230	26.3	229.8	(24FT) 289	33.0	288.9
54	6.2	54.3	113	13.0	113.4	172	19.7	172.4	231	26.5	231.5	290	33.2	290.5
56	6.4	55.9	115	13.1	115.0	174	19.9	174.1	233	26.7	233.1	292	33.4	292.2
57	6.6	57.6	117	13.3	116.6	176	20.1	175.7	235	26.8	234.8	294	33.6	293.8
59	6.8	59.2	118	13.5	118.3	177	20.3	177.3	236	27.0	236.4	295	33.8	295.5
(5FT) 61	7.0	60.9	(10FT) 120	13.7	119.9	(15FT) 179	20.5	179.0	238	27.2	238.0	297	34.0	297.1
62	7.1	62.5	121	13.9	121.6	181	20.7	180.6	(20FT) 240	27.4	239.7	299	34.2	298.7
64	7.3	64.1	123	14.1	123.2	182	20.8	182.3	241	27.6	241.3			
66	7.5	65.8	125	14.3	124.8	184	21.0	183.9	243	27.8	243.0			

Note: all values are rounded to the nearest 0.1 inch


Endcap (No Connector) -NPF




End Connector -IME



Back Connector -IMB



Side Connector -IMSA and -IMSB



5150 | Power Consumption Per Fixture Length cont.


Based on operation with PS-UNI series of power supplies. Use Actual Length for Order Code Entry

Tolerance for Actual Lengths less than 6 ft is +/- 0.2", Actual Lengths between 6 ft and 16 ft is +/- 0.3", and Actual Lengths greater than 16 ft is +/- 0.6"


Nominal Length (in)	W	Actual Length (in)	Nominal Length (in)	W	Actual Length (in)	Nominal Length (in)	W	Actual Length (in)	Nominal Length (in)	W	Actual Length (in)	Nominal Length (in)	W	Actual Length (in)
(25FT) 300	34.3	300.4	359	41.1	359.4	418	47.8	418.4	477	54.6	477.5	537	61.3	536.5
302	34.5	302.0	(30FT) 361	41.3	361.0	(35FT) 420	48.0	420.1	479	54.8	479.1	538	61.5	538.2
304	34.7	303.7	363	41.5	362.6	422	48.2	421.7	(40FT) 481	55.0	480.8	(45FT) 540	61.7	539.8
305	34.9	305.3	364	41.6	364.3	423	48.4	423.3	482	55.2	482.4	541	61.9	541.5
307	35.1	306.9	366	41.8	365.9	425	48.6	425.0	484	55.3	484.0	543	62.1	543.1
308	35.3	308.6	368	42.0	367.6	427	48.8	426.6	486	55.5	485.7	545	62.3	544.7
310	35.5	310.2	369	42.2	369.2	428	49.0	428.3	487	55.7	487.3	546	62.5	546.4
(26FT) 312	35.7	311.9	371	42.4	370.8	430	49.2	429.9	489	55.9	489.0	548	62.7	548.0
313	35.8	313.5	(31FT) 372	42.6	372.5	(36FT) 432	49.3	431.5	491	56.1	490.6	550	62.8	549.7
315	36.0	315.1	374	42.8	374.1	433	49.5	433.2	(41FT) 492	56.3	492.2	(46FT) 551	63.0	551.3
317	36.2	316.8	376	43.0	375.8	435	49.7	434.8	494	56.5	493.9	553	63.2	552.9
318	36.4	318.4	377	43.1	377.4	436	49.9	436.5	495	56.7	495.5	555	63.4	554.6
320	36.6	320.1	379	43.3	379.0	438	50.1	438.1	497	56.8	497.2	556	63.6	556.2
322	36.8	321.7	381	43.5	380.7	440	50.3	439.7	378	57.0	498.8	558	63.8	557.9
323	37.0	323.3	382	43.7	382.3	441	50.5	441.4	499	57.2	500.4	559	64.0	559.5
(27FT) 325	37.2	325.0	(32FT) 384	43.9	384.0	443	50.7	443.0	502	57.4	502.1	561	64.2	561.1
327	37.3	326.6	386	44.1	385.6	(37FT) 445	50.8	444.7	(42FT) 504	57.6	503.7	563	64.3	562.8
328	37.5	328.3	387	44.3	387.3	446	51.0	446.3	505	57.8	505.4	(47FT) 564	64.5	564.4
330	37.7	329.9	389	44.5	388.9	448	51.2	448.0	507	58.0	507.0	566	64.7	566.1
331	37.9	331.6	391	44.6	390.5	450	51.4	449.6	509	58.2	508.7	568	64.9	567.7
333	38.1	333.2	392	44.8	392.2	451	51.6	451.2	510	58.3	510.3	569	65.1	569.4
335	38.3	334.8	394	45.0	393.8	453	51.8	452.9	512	58.5	511.9	571	65.3	571.0
(28FT) 336	38.5	336.5	(33FT) 395	45.2	395.5	454	52.0	454.5	514	58.7	513.6	573	65.5	572.6
338	38.7	338.1	397	45.4	397.1	(38FT) 456	52.2	456.2	515	58.9	515.2	574	65.7	574.3
340	38.8	339.8	399	45.6	398.7	458	52.3	457.8	(43FT) 517	59.1	516.9	(48FT) 576	65.8	575.9
341	39.0	341.4	400	45.8	400.4	459	52.5	459.4	518	59.3	518.5	578	66.0	577.6
343	39.2	343.0	402	46.0	402.0	461	52.7	461.1	520	59.5	520.1	579	66.2	579.2
345	39.4	344.7	404	46.1	403.7	463	52.9	462.7	522	59.7	521.8	581	66.4	580.8
346	39.6	346.2	405	46.3	405.3	464	53.1	464.4	523	59.8	523.4	582	66.6	582.5
(29FT) 348	39.8	347.9	407	46.5	406.9	466	53.3	466.0	525	60.0	525.1	584	66.8	584.1
349	40.0	349.5	(34FT) 409	46.7	408.6	(39FT) 468	53.5	467.6	527	60.2	526.7	586	67.0	585.8
351	40.1	351.2	410	46.9	410.2	469	53.7	469.3	(44FT) 528	60.4	528.3	(49FT) 587	67.2	587.4
353	40.3	352.8	412	47.1	411.9	471	53.8	470.9	530	60.6	530.0	589	67.3	589.0
354	40.5	354.4	413	47.3	413.5	473	54.0	472.6	532	60.8	531.6	591	67.5	590.7
356	40.7	356.1	415	47.5	415.1	474	54.2	474.2	533	61.0	533.3			
358	40.9	357.7	417	47.7	416.8	476	54.4	475.8	535	61.2	534.9			

Note: all values are rounded to the nearest 0.1 inch


Endcap (No Connector) -NPF




End Connector -IME



Back Connector -IMB



Side Connector -IMSA and -IMSB



Power Supplies

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

For use with Static White


Ordering Code - Universal Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	WATTAGE	OUTPUT
PS - Power Supply, 120-277VAC	UNI - 0-10V Dimming (0.1%), Phase Dimming (0.1%)	30 - 30 Watts 60 - 60 Watts 96 - 96 Watts 3x96 - 3x96 Watts	24 - 24 VDC

Compatibility: View a complete list of compatible dimmers on the PS-UNI product page.

0-10V - 0.1% dimming
MLV/ELV/TRIAC - 0.1% dimming, consult dimming compatibility chart

MODELS	PS-UNI-30W	PS-UNI-60W	PS-UNI-96W	PS-UNI-3X96W
Length	6.50"	7.40"	8.66"	11.85"
Width	3.73"	3.73"	3.73"	4.32"
Depth	1.61"	1.61"	1.61"	1.81"

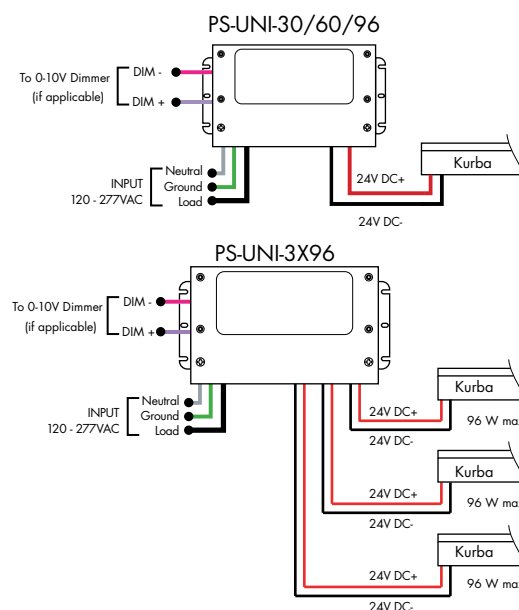


For use with Static White


Ordering Code - 0-10V Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS - Power Supply, 120-277VAC	010V-LIN - 0-10V Dimming (0.1%), Linear 010V-LOG - 0-10V Dimming (0.1%), Logarithmic	D - Dry	96 - 96 Watts 3x96 - 3x96 Watts	24 - 24 VDC

MODELS	96W	3X96
Length	14.40"	15.00"
Width	5.20"	6.62"
Depth	2.60"	4.45"

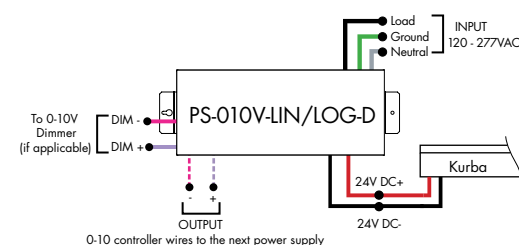

PS-010V-LIN/LOG-D-3X96

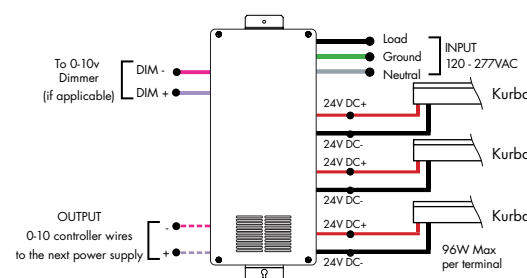


Power Supplies

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

For use with Static White

Ordering Code - Athena 0-10V LED Driver

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT	FEATURE
PS - Power Supply, 120-277VAC	010V-LIN - 0-10V Dimming (0.1%), Linear 010V-LOG - 0-10V Dimming (0.1%), Logarithmic	D-Dry	96-96 Watts	24-24 VDC	AWNDR-Athena

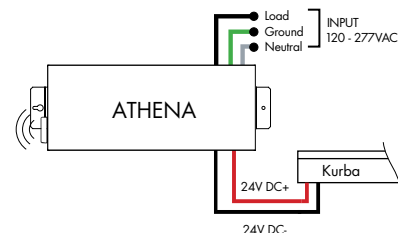


MODELS	96W
Length	14.40"
Width	5.20"
Depth	2.60"

For use with Static White

Ordering Code - DALI 2 Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS - Power Supply, 120-277VAC	DALI2-DT6 - DALI2 DT6 (0.1%)	D-Dry	96-96 Watts	24-24 VDC

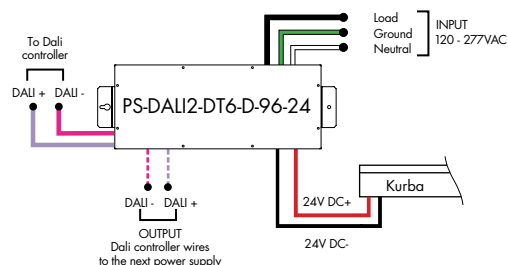


Model	96W
Length	14.40"
Width	5.20"
Depth	2.60"


For use with Static White

Ordering Code - DALI Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS - Power Supply, 120-277VAC	DALI - DALI (0.1%)	D-Dry	96-96 Watts 3x96-3x96 Watts	24-24 VDC

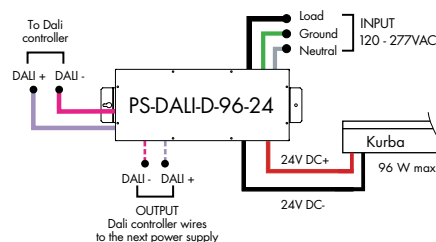

Model	96W	3X96
Length	14.40"	15.00"
Width	5.20"	6.62"
Depth	2.60"	4.56"

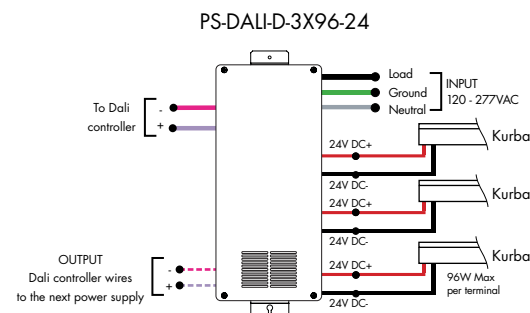

Power Supplies

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.



For use with Static White

Ordering Code - DMX Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS - Power Supply, 120-277VAC	DMX - DMX (0.1%)	D - Dry	96 - 96 Watts 3x96 - 3x96 Watts	24 - 24 VDC

MODELS	96W	3X96
Length	14.40"	15.00"
Width	5.20"	6.62"
Depth	2.60"	4.56"

ZONAL CONTROL POWER SUPPLIES.
CONTROL MULTIPLE TAPES/ZONES USING DMX CHANNELS.

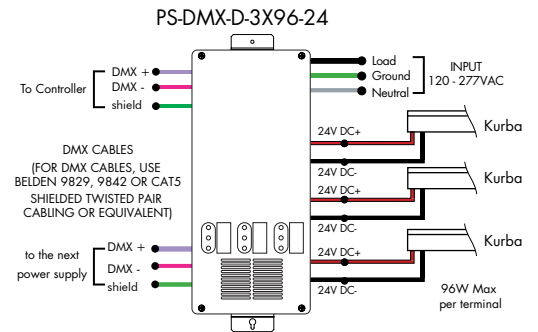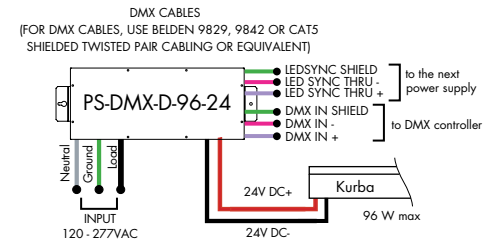


For use with Static White

Ordering Code - Non-Dimming Power Supply, 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS - Power Supply, 120-277VAC	ND - Non Dimming	D - Dry	96 - 96 Watts	24 - 24 VDC

MODELS	96W
Length	14.40"
Width	5.20"
Depth	2.60"

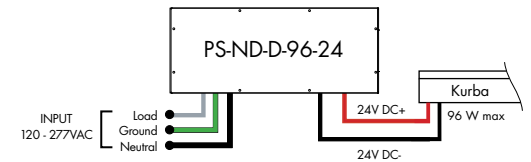


For use with Static White

Ordering Code - In-Ground Power Supplies

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS120 - Power Supply, 120VAC PS240 - Power Supply, 240VAC PS277 - Power Supply, 277VAC	ELV - ELV Dimming (1%)	IG - In Ground	2X96 - 2X96 Watts	24 - 24 VDC

MODELS	2X96W
Length	8.40"
Width	8.30"
Depth	8.10"

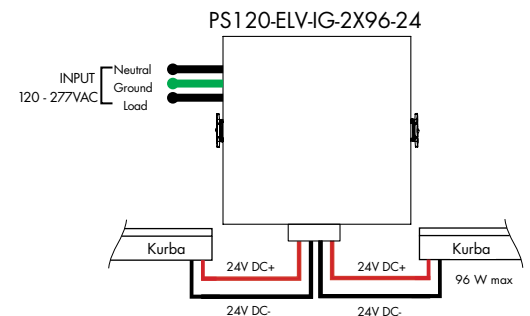

Power Supplies

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.



Luminii is a Lutron OEM Advantage Partner


Lutron Power Supplies 1%

MODEL

L3DA4U1UKL-CV240

HiLume™ 1% EcoSystem Voltage LED driver
40W max

MODELS	L3DA4U1UKL-CV240
Length	4.98"
Width	4.00"
Depth	2.62"

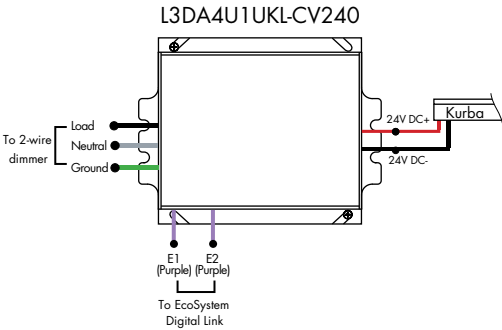

Luminii is a Lutron OEM Advantage Partner

Lutron Power Supplies 0.1%

MODEL

L3D0-96W24V-U

HiLume™ 0.1% EcoSystem Voltage LED Driver with Soft-On, Fade-to-Black™
96W max

MODELS	L3D0
Length	10.50"
Width	5.50"
Depth	2.00"

