

## Features

- Nine drivers selections available to cover wide range of applications.
- Three output options available up to 1300 lumens.
- 5 year warranty.



## Finish Options

<input type="checkbox"/> White	<input checked="" type="checkbox"/> Mocha
<input checked="" type="checkbox"/> Black	<input type="checkbox"/> Charcoal
<input type="checkbox"/> Silver	<input type="checkbox"/> Cerulean
<input type="checkbox"/> Firebrick	<input type="checkbox"/> Firebrick



Made in Canada

with Imported Parts

## Technical Information

OUTPUT OPTIONS	700 lm	1000 lm	1300 lm
<b>Fixture wattage</b>	6.1 W	9.1 W	14.6 W
<b>Delivered Lumen at full on</b>	568 lm	837 lm	1262 lm
<b>Efficacy</b>	93 lm/W	92 lm/W	90 lm/W
<b>Center Beam Candlepower (18° Faceted Reflector)</b>	842 cd	1241 cd	1764 cd

CCT	Multiplier	CRI	TM-30		
			R <sub>f</sub>	R <sub>g</sub>	R <sub>g</sub>
2500K	0.81	92	90	104	77
2700K	0.92	92	91	102	61
3000K	0.97	95	92	102	61
3500K	1.00	95	93	101	72
4000K	1.07	95	92	103	68
6500K	1.05	96	91	100	89

Integral Driver Example: Fixture LET11-SC-07-25K-ASM-DL-WH-WH-PHSD-NA

Remote Driver Example: Fixture LET11-SC-07-25K-ASM-DL-WH-WH-PHSD-NA  
HRM-LET11-SC-07-25K-PHSD-NA

## Ordering Code

### Fixture

MODEL	TYPE	OUTPUT	CCT	OPTIC	ACCESSORY	BODY FINISH	BAFFLE FINISH
LET11- <i>LeTo 11</i>	SC - Surface Conduit	07 - 700 lumens (6.1W) 10 - 1000 lumens (9.1W) 13 - 1300 lumens (14W)	25K - 2500K 27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K 65K - 6500K	ASM - Asymmetric	DL - Diffusing Lens	Standard WH - White BK - Black SL - Silver	Standard WH - White BK - Black SL - Silver

DRIVER<sup>2</sup> - DRIVER OPTIONS<sup>4</sup>

PHSD - Forward/Reverse Phase, 1% Dimming, 120V Only  
0105 - 0-10V, 1% Dimming, 120/277V  
0103 - 0-10V, 1% Dimming, 347V Only  
010L - EddoLED, 0-10V, Linear, 0.1% Dimming, 120/277V  
010G - EddoLED, 0-10V, Log, 0.1% Dimming, 120/277V  
DALI - EddoLED, DALI Protocol 2, DT-6, 0.1% Dimming, 120/277V (Standard as LOG)<sup>5</sup>  
DAL18 - EddoLED, DALI Protocol 2, DT-8, 0.1% Dimming, 120/277V (Standard as LOG)<sup>5</sup>  
LUTE - Lutron Hilume Ecodigital, 1% Dimming, 120V/277V  
DMX - EddoLED, DMX, 0.1% Dimming, 120V/277V

1 - Premium finishes may have extended lead times. Custom RALs are available, please consult Inside Sales with specific request.

2 - All drivers remote except PHSD/0105 driver options.


3 - Emergency option comes prewired from factory with driver in remote housing. 8W of continuous power provided for a minimum of 90 minutes. Must be installed within 30 feet of luminaire using 18 AWG wire. Not available with 0103, DMX, DAL18 or LUTE Driver.

4 - AVNIR/CSMB available upon request, contact Sense for details.

5 - DALI and DAL18 driver options use logarithmic dimming curve as standard. For LINEAR dimming curve, add "LIN" after the dimming code, i.e. DALI LIN

CONTACT FACTORY FOR MORE OPTIONS.

## Dimensions

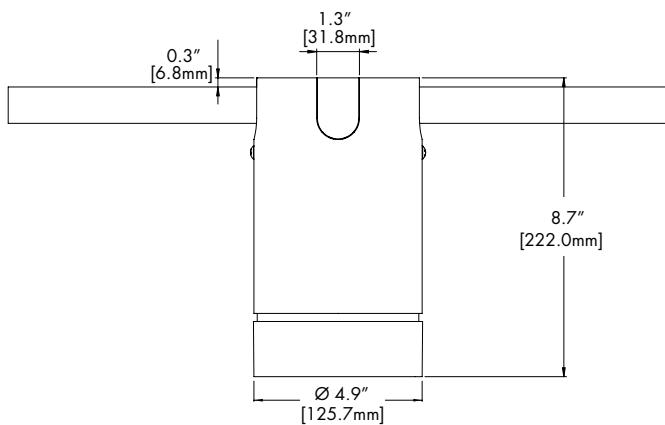

## Lens

### DL

Diffusing Lens



Light Loss Factor: 87%\*

\*Light Loss Factor calculated with 60° faceted reflector.


## Remote Driver Housing

Depending on the options selected in the order code on page 1, a Remote Driver Housing may be required. This will automatically be generated and put on your order as necessary.

REMOTE DRIVER	MODEL	OUTPUT	CCT	DRIVER	DRIVER OPTIONS
HRM-Housing, Remote	LET11-SC-Leto 11 Surface Conduit	Same as Fixture	Same as Fixture	Same as Fixture	Same as Fixture


Maximum mounting distance to luminaire using 18 AWG wire						
010S	PHSD	010L	010G	DALI DALI8	DMX	LUTE
16'	16'	72'	72'	72'	149'	15'

### HRM Single with Externally Mounted Driver

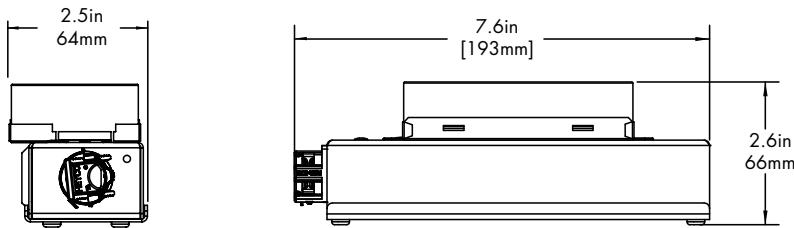


Driver
010L or 010G
010S
010L or 010G or 010S
DALI or LUTE

### HRM Single

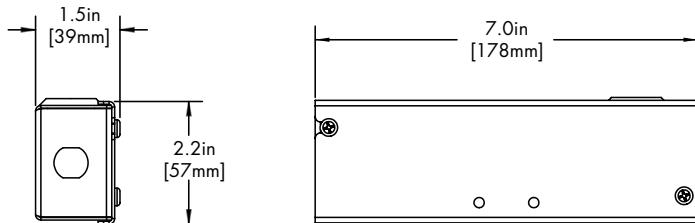

Driver
PHSD


### HRM Double

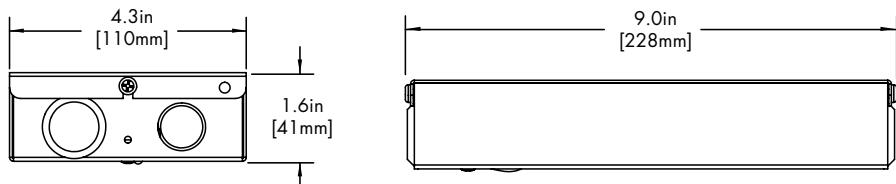

Driver
DALI8
DMX

### EMG Emergency Driver

120 minute EMG operation time.

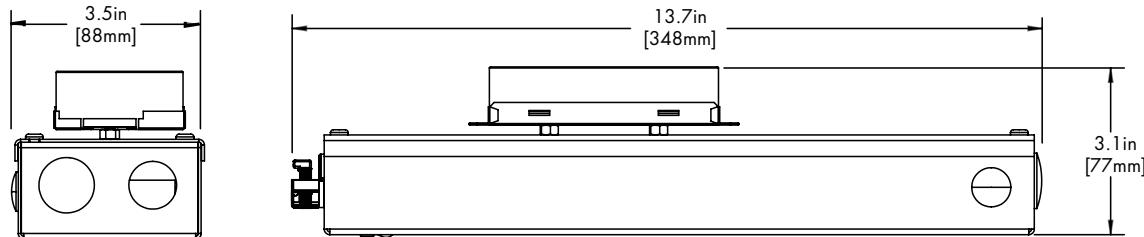

Driver
EMG


**Standard Colors**
**BK**  
Black

**WH**  
White

**SL**  
Silver



**Premium Colors**
**MA**  
Mocha

**CC**  
Charcoal

**CR**  
Cerulean

**FB**  
Firebrick


**Two Tone Baffle**

Inside finish refers to Baffle Finish selection from page 1. Any combination may be used for baffle and body finishes.




## TM-30


2500K

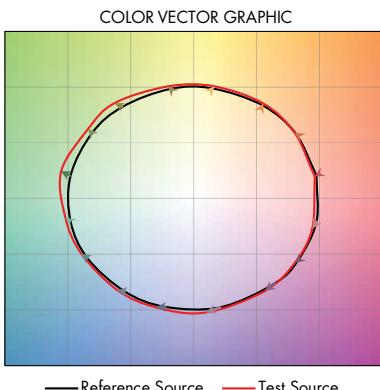


2700K

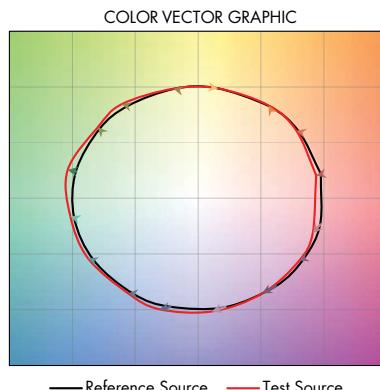


3000K

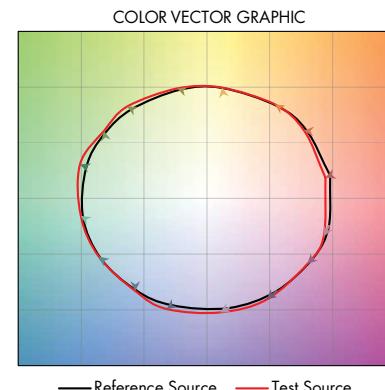


3500K

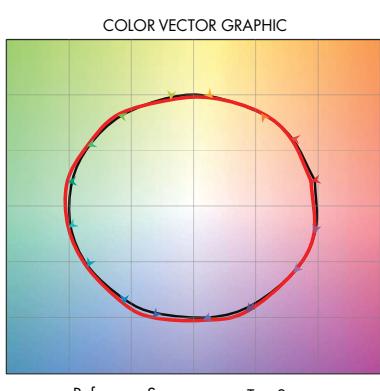

4000K

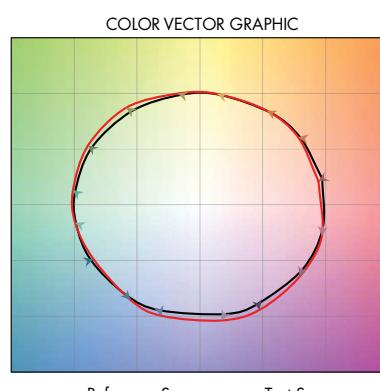

6500K

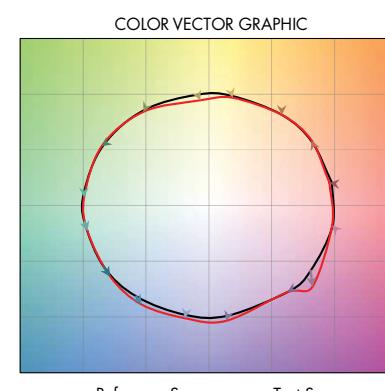

## Photometry

## 18° Faceted Reflector

