

Features

- Faceted and Smooth metal reflectors provide beam spreads between 10° to 80°.
- Nine drivers selections available to cover wide range of applications.
- Two output options available up to 1000 lumens.
- 5 year warranty.




Finish Options

| | |
|---|-----------------------------------|
| <input type="checkbox"/> White | <input type="checkbox"/> Mocha |
| <input checked="" type="checkbox"/> Black | <input type="checkbox"/> Charcoal |
| <input type="checkbox"/> Silver | <input type="checkbox"/> Cerulean |
| <input type="checkbox"/> Firebrick | |



Made in Canada
with Imported Parts

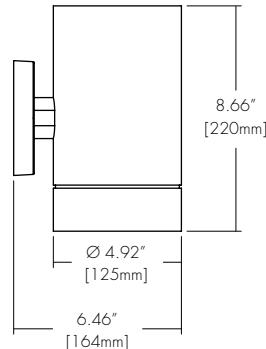

Technical Information

| OUTPUT OPTIONS | 700 lm | 1000 lm |
|--|----------|----------|
| Fixture wattage | 6.1 W | 9.1 W |
| Delivered Lumen at 3500K | 656 lm | 994 lm |
| Efficacy | 108 lm/W | 109 lm/W |
| Center Beam Candlepower (10° Faceted Reflector) | 5474 cd | 8294 cd |
| Fixture wattage | 6.1 W | 9.1 W |
| Delivered Lumen at 3500K | 614 lm | 857 lm |
| Efficacy | 101 lm/W | 94 lm/W |

| CCT | Multiplier | TM-30 | | | |
|-------|------------|-------|----------------|----------------|----------------|
| | | CRI | R _f | R _g | R ₉ |
| 2500K | 0.81 | 92 | 90 | 104 | 77 |
| 2700K | 0.92 | 92 | 91 | 102 | 61 |
| 3000K | 0.97 | 95 | 92 | 102 | 61 |
| 3500K | 1.00 | 95 | 93 | 101 | 72 |
| 4000K | 1.07 | 95 | 92 | 103 | 68 |
| 6500K | 1.05 | 96 | 91 | 100 | 89 |

Integral Driver Example: Fixture LET11W-WM-0707-25K-F10-F17-CL-WH-WH-PHSD-NA

Remote Driver Example: Fixture LET11W-WM-0707-25K-F10-F17-CL-WH-WH-010L-NA

HRM-LET11W-WM-0707-25K-010L-NA

Ordering Code

Fixture

| MODEL | TYPE | OUTPUT | CCT | OPTIC | OPTIC UP | ACCESSORY | BODY FINISH | BAFFLE FINISH |
|----------------|---------------|--|--|---|--|------------------------------------|---|---|
| LET11W-Leto 11 | WM-Wall Mount | 0707-700 lumens Down, 700 lumens up | 25K-2500K 27K-2700K 30K-3000K 35K-3500K 40K-4000K 65K-6500K | F10-10 Degree, Faceted F18-18 Degree, Faceted F30-30 Degree, Faceted F45-45 Degree, Faceted F60-60 Degree, Faceted S30-30 Degree, Smooth S45-45 Degree, Smooth S80-80 Degree, Smooth | F17-17 Degree, Faceted F24-24 Degree, Faceted F60-60 Degree, Faceted | CL-Clear Lens DL-Diffusing Lens | Standard WH-White BK-Black SL-Silver | Standard WH-White BK-Black SL-Silver |

LET11W-Leto 11 WM-Wall Mount 0707-700 lumens Down,
700 lumens up

DRIVER²

| | |
|---|---|
| - | - |
|---|---|

PHSD - Forward/Reverse Phase, 1% Dimming, 120V Only²
010S - 0-10V, 1% Dimming, 120/277V²
0103 - 0-10V, 1% Dimming, 347V Only
010L - EldoLED, 0-10V, Linear, 0.1% Dimming, 120/277V
010G - EldoLED, 0-10V, Log, 0.1% Dimming, 120/277V
DALI - EldoLED, DALI Protocol 2, DT-6, 0.1% Dimming, 120/277V (Standard as LOG)⁵
DALI8 - EldoLED, DALI Protocol 2, DT-8, 0.1% Dimming, 120/277V (Standard as LOG)⁵
LUTE - Lutron Hilmatec Ecodigital, 1% Dimming, 120V/277V
DMX - EldoLED, DMX, 0.1% Dimming, 120V/277V

DRIVER OPTIONS⁴

NA - None
EMG - Emergency Driver³

1 - Premium finishes may have extended lead times. Custom RALs are available, please consult Inside Sales with specific request.

2 - All drivers remote except PHSD/010S driver options

3 - Emergency option comes prewired from factory with driver in remote housing, 8W of continuous power provided for a minimum of 90 minutes. Must be installed within 30 feet of luminaire using 18 AWG wire. Not available with 0103, DMX, DALI8 or LUTE Driver.

4 - AVVNR/CSMB available upon request, contact Senso for details.

5 - DALI and DALI8 driver options use logarithmic dimming curve as standard. For LINEAR dimming curve, add "LIN" after the dimming code, i.e. DALILIN

CONTACT FACTORY FOR MORE OPTIONS.

Lens & Accessory Options

OPTC-ACC-CL-94MM

Clear Lens

Also available with complete fixture, use ordering code.

-CL



Light Loss Factor: 100%*

*Light Loss Factor calculated with 60° faceted reflector.

OPTC-ACC-DL-94MM

Diffusing Lens

Also available with complete fixture, use ordering code.

-DL



Light Loss Factor: 87%*

Optics

RFLC-FXX-94MM

Faceted Reflector

Also available with complete fixture, use ordering code.

-F10/-F18/-F30/-F45/-F60



| FFX | Optic |
|-----|-------------|
| F10 | 10° Faceted |
| F18 | 18° Faceted |
| F30 | 30° Faceted |
| F45 | 45° Faceted |
| F60 | 60° Faceted |
| S30 | 30° Smooth |
| S45 | 45° Smooth |
| S80 | 80° Smooth |

Remote Driver Housing


Depending on the options selected in the order code on page 1, a Remote Driver Housing may be required. This will automatically be generated and put on your order as necessary.

| REMOTE DRIVER | MODEL | OUTPUT | CCT | DRIVER | DRIVER OPTIONS |
|---------------------|----------------------------------|-----------------|-----------------|-----------------|-----------------|
| HRM-Housing, Remote | LET11W-WM-Leto 11 Wet Wall Mount | Same as Fixture | Same as Fixture | Same as Fixture | Same as Fixture |

| Maximum mounting distance to luminaire using 18 AWG wire | | | | | | |
|--|------|------|------|------------|------|------|
| 010S | PHSD | 010L | 010G | DALI DALI8 | DMX | LUTE |
| 16' | 16' | 72' | 72' | 72' | 149' | 15' |


4" J-box

Minimum volume required to mount drivers in junction box: 70mm x 40mm x 30mm.

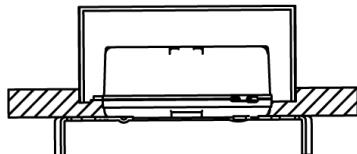


| Driver |
|--------|
| PHSD |
| 010S |

HRM Single with Externally Mounted Driver

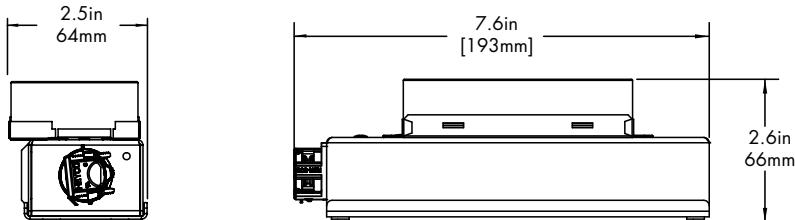


| Driver |
|----------------------|
| 010L or 010G |
| 010S |
| 010L or 010G or 010S |
| DALI or LUTE |

HRM Single

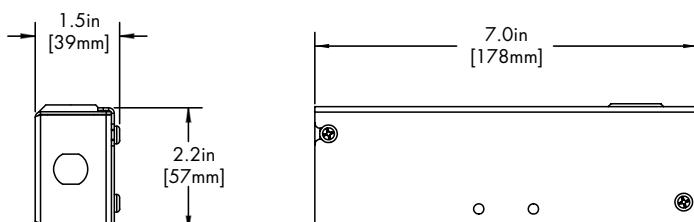

| Driver |
|--------|
| PHSD |


HRM Double

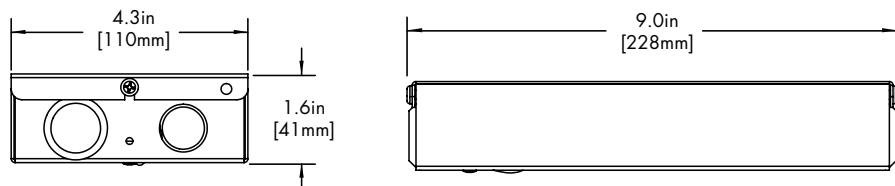

| Driver |
|--------|
| DALI8 |
| DMX |

EMG Emergency Driver

120 minute EMG operation time.

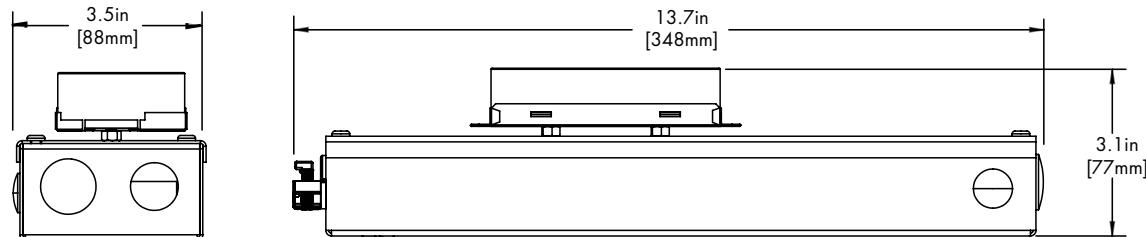

| Driver |
|--------|
| EMG |

Standard Colors


BK
Black



WH
White



SL
Silver



Premium Colors


MA
Mocha




CC
Charcoal



CR
Cerulean




FB
Firebrick




Two Tone Finishes

Inside finish refers to Baffle Finish selection from page 1. Any combination may be used for baffle and body finishes.




TM-30


2500K

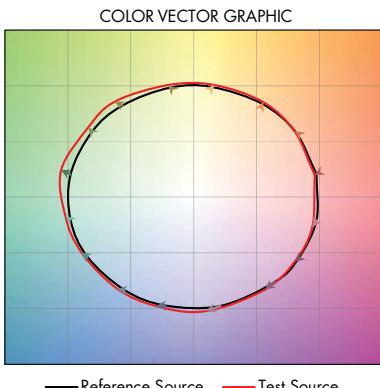


2700K

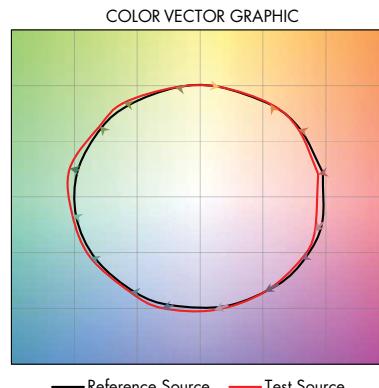


3000K

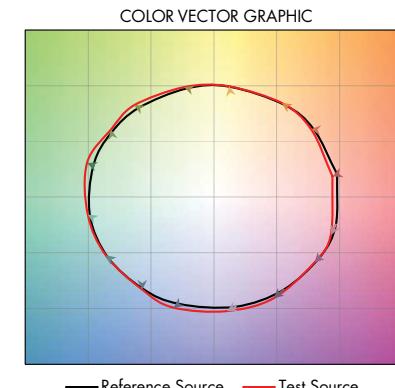


3500K

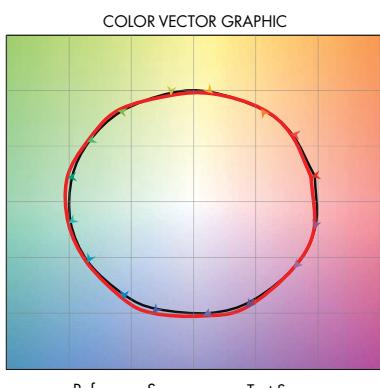

4000K


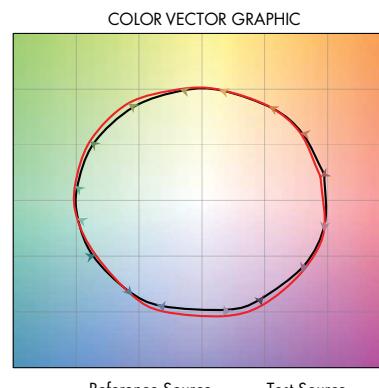


6500K

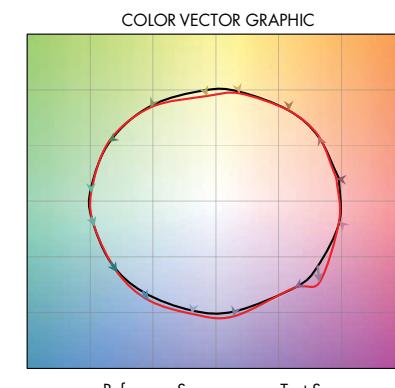

Photometry

LET11-WM-0707-35K-F10-F17-NA

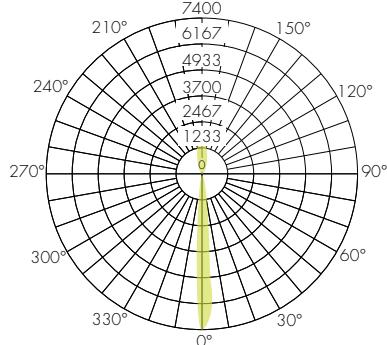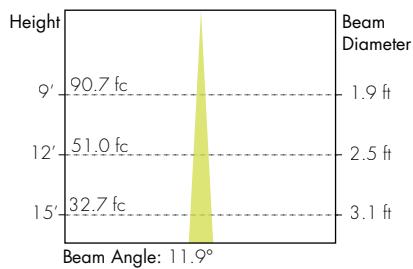

LET11-WM-1010-35K-F10-F17-NA

