

LETO 11 Mini T

TRACK LED SPOTLIGHT

 **senso**
by luminii



Leto 11 Mini T - Track LED Spotlight. LETO 11 Mini T is a track version of the Medium Leto 11 Mini. It offers an articulating, short-stem spotlight combined with a versatile and efficient LED. Excels in display based spaces like galleries, industrial and retail.

Ordering Code

Fixture	662							
	1	2	3	4	5	6	7	8
Driver								
	1	2	3	4				

Product Specifications

SAMPLE: Fixture **662 - A90 - 617 - 27 - 07 - 00 - 01 - 01** | Driver **STD - 120 - A90 - 07**

1 - Model	2 - CRI/LED	3 - Optic	4 - CCT	5 - Lumen	6 - Accessory
662 • Leto 11 Mini One Circuit	A90 • 93+ CRI Accuracy WD • Warm Dimming ^{*WD} (90 CRI)	617 • 17° 630 • 30° 645 • 45°	25 • 2500K 27 • 2700K 30 • 3000K ^{WD} 35 • 3500K 40 • 4000K 65 • 6500K	07 • 700 (6.1W) ^{WD} 10 • 1000 (9.1W) ^{WD} 15 • 1500 (14W)	00 • No Accessory DL • Diffusing Film HO • Honeycomb
663 • Leto 11 Mini Two Circuit					
667 • Leto 11 Mini [†] Three Circuit					

7 - Body Color		8 - Baffle Color		1 - Driver	Dim Level	2 - Voltage	3 - CRI/LED	4 - Lumen
<i>Standard</i>	<i>Premium</i>	<i>Standard</i>	<i>Premium</i>	STD • Non Dimming	N/A	120 • 120V	Same as Fixture	Same as Fixture
01 • White	52 • Mocha	01 • White	52 • Mocha	LCS • 0 - 10 Volt Protocol ^{*WD}	1%	277 • 277V		
02 • Black	53 • Charcoal	02 • Black	53 • Charcoal	DIM • Phase ^{*†}	1%			
08 • Silver	54 • Cerulean	08 • Silver	54 • Cerulean					
	55 • Firebrick		55 • Firebrick					
	BZ • Bronze		BZ • Bronze					
	WN • Warm Nickel		WN • Warm Nickel					
	AB • Aged Brass		AB • Aged Brass					
	XX • RAL		XX • RAL					

*1 120V only

*WD Must select when specifying **WD** - Warm Dimming

LETO 11 Mini T

TRACK LED SPOTLIGHT



Light Engine

Output: up to 1500lm
High Efficacy: up to 110 lumen/Watt
Color Options (CCT): 2500K, 2700K, 3000K, 3500K, 4000K, 6500K
Color Consistency: Range within a 3-MacAdam Ellipse
Color rendering (CRI): 93+ CRI & 50+ R9 Value

Driver

Dimming: 1% dimming standard
Ripple: Industry leading Low ripple
Efficiency: Power Factor >0.9
Efficiency over 85%
Class 2 output for safety

Lumen Option	700lm	1000lm	1500lm
Fixture Wattage	6.1W	9.1W	14W
Delivered Lumen	681lm	1021lm	1574lm

Light Engine: Warm Dimming


Output: 1000lm
High Efficacy: up to 98 lumen/Watt
Color Temperature (CCT): 3000K dimmed to 1800K
Color Consistency: Range within a 3-MacAdam Ellipse
Color rendering (CRI): 90 CRI

Driver

Dimming: 1% dimming standard with 0.1% option
Dimmer switch must be capable of dimming less than 5%
Ripple: Industry leading Low ripple
Efficiency: Power Factor >0.9
Efficiency over 85%
Class 2 output for safety
Installation: Small Footprint allows retrofit installations

1 / 2 / 3 Circuit Switch

When the track is connected to a two or three-circuit system, it is possible to select the phase (L1, L2 or L3) of each luminaire in your system using the selector under the adapter.

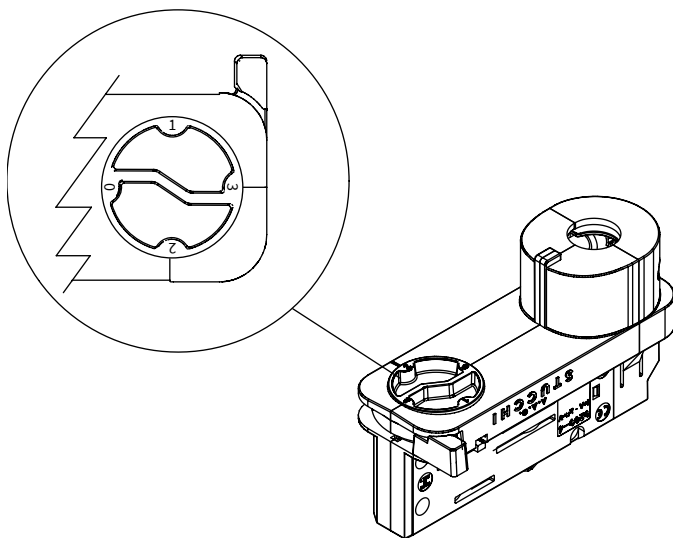


Installation

- 358° rotation
- 0° to 90° tilt
- Includes track adapter (single or dual phase)

Construction

- Machined aluminum construction
- High quality, scratch resistant powder coated finish in standard, premium or custom colors
- Made in Canada

Dimensions

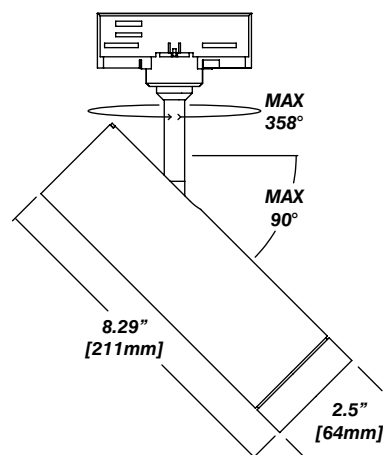


LETO 11 Mini T

TRACK LED SPOTLIGHT

 **senso**
by luminii

Standard Finishes

01 - White



02 - Black



08 - Silver



Premium Finishes

55 - Mocha



56 - Charcoal



57 - Cerulean




58 - Firebrick



BZ - Bronze



WN - Warm Nickle



AB - Aged Brass



Accessories

Diffusing Film



Honeycomb

