LETO 11

PENDANT LED DOWNLIGHT

senso by luminii



Leto 11 - Pendant LED Downlight. Leto 11 is a large cylinder LED pendant designed for general light. It is the perfect pendant for creating even light throughout your space without distracting from your design.

Ordering Code

	1	2	3	4	5	6	7	8
Fixture	**695**							
Driver							--	--

Product Specifications

SAMPLE: *Fixture* ***695 - A90 - 610 - 27 - 07 - AR - 08 - 02*** | *Driver* ***952 - 08 - 00 - 01 - LCS - 120 - A90 - 07***

1 - Model

695 · Leto 11

2 - LED

A90 · 93+ CRI Accuracy

3 - Optic

Faceted

610 · 10˚
618 · 18˚
630 · 30˚
645 · 45˚
660 · 60˚
728 · 28˚ Glass Optic*1
748 · 48˚ Glass Optic*1

Smooth

630S · 30˚
645S · 45˚

4 - CCT

25 · 2500K
27 · 2700K
30 · 3000K
35 · 3500K
40 · 4000K
65 · 6500K

5 - Lumen

07 · 700 *(6.1W)*
10 · 1000 *(9.1W)*
15 · 1500 *(14W)*
20 · 2000 *(19.8W)*
30 · 3000 *(31.8W)*
35 · 3500 *(34.6W)*

6 - Accessory

00 · No Accessory
AR · Acrylic Ring
DL · Diffusing Lens
HO · Honeycomb
SL · Solite Lens

7 - Body Color

Standard

01 · White
02 · Black
08 · Silver

Premium

52 · Mocha
53 · Charcoal
54 · Cerulean
55 · Firebrick
XX · RAL

8 - Baffle Color

Standard

01 · White
02 · Black
08 · Silver

Premium

52 · Mocha
53 · Charcoal
54 · Cerulean
55 · Firebrick
XX · RAL

1 - Canopy Style

951 · Round
951F · Round Flangeless
952 · Square

2 - Canopy Color

Standard

01 · White
02 · Black
08 · Silver

Premium

52 · Mocha
53 · Charcoal
54 · Cerulean
55 · Firebrick
XX · RAL

3 - Suspension *(6' incl.)*

00 · Feed Cable
01 · 1 Aircraft + Feed Cable
02 · 2 Aircraft + Feed Cable
03 · Solid Stem *(6' MAX)*
04 · Hang Straight Solid Stem
05 · 2 Powered Aircraft*2

Contact Senso for custom length

4 - Suspension Cable

00 · None*2
01 · White
02 · Black
03 · Clear
XX · Custom

5 - Driver

		Dim Level
STD	Non Dimming	N/A
LCS	0 - 10 Volt Protocol	1%
DIM	Phase*3	1%
ELDOLC	EldoLED 0 - 10 Volt*4	0.1%
DALI	Dali Protocol*4	0.1%
LUTES	Hilume Ecodigital*4	1%
LUT2W	2 Wire for phase*3/4	1%
DMX	DMX Driver*5	
EMG	Emergency Driver*5/6	
CSMB	Casambi Wireless Control*5/6	

6 - Voltage

120 · 120V
277 · 277V
347 · 347V*5/7

7 - LED

Same as Fixture

8 - Lumen

Same as Fixture

*1 accessories not available / limited to 1500lm
*2 no feed cable color option for **05** - 2 Powered Aircraft
*3 120V only
*4 requires square canopy
*5 remote mount
*6 second driver required
*7 not available with ELDO, Lutron or DMX

5 YEAR WARRANTY · TITLE 24 JA8 COMPLIANT · cULus LISTED · RoHS · MADE IN CANADA

403-216-7043 | sensolighting.com

LETO 11

PENDANT LED DOWNLIGHT

senso by luminii

Canopy / Suspension

Round Canopy: W - Ø5.17" [131.24 mm] / H - 2.36" [60mm]

Drivers mounted in the Round Canopy: **STD, LCS, DIM**
Drivers remote mounted: **ELDOLC, DALI, LUTES, LUTW2, DMX, EMG, CSMB**


Square Canopy: W/L - 5.67" [144mm] / H - 2.28" [58mm]

Drivers mounted in the Square Canopy: **STD, LCS, DIM, ELDOLC, DALI, LUTES**
Drivers remote mounted: **DMX, EMG, CSMB**


Round Flangless: W - Ø2.53" [64.25 mm]

All drivers remote mount


Feed Cable




1 Aircraft Cable w/ Feed Cable




2 Aircraft Cable w/ Feed Cable



2 Powered Aircraft Cable



Solid Stem



Hang Straight Solid Stem *(MAX 30°)*




Installation


- The included canopy fits on a standard junction box
- Height adjustable aircraft cable, feed cable or solid stem suspension (specify height) included
- Electrical feed cable included

Construction / Finish

- High quality, scratch resistant powder coated finish in standard, premium or custom colors
- Aluminum extruded Body
- Made in Canada

Dimensions

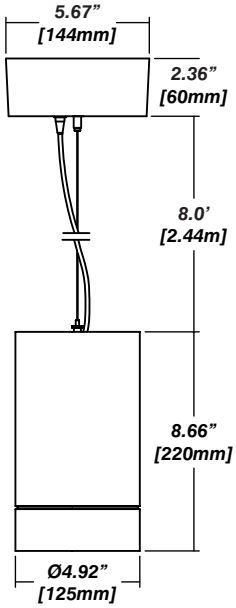



Reflectors

Senso metal spun faceted reflectors are specifically designed to retain as much light as possible. This results in a more power efficient fixture with a higher delivered lumen.

Faceted Reflector



Domed Glass Optic



Accessories

Acrylic Ring




Diffusing Lens



Solite Lens



Honeycomb Mesh



5 YEAR WARRANTY · TITLE 24 JA8 COMPLIANT · cULus LISTED · RoHS · MADE IN CANADA

LETO 11

PENDANT LED DOWNLIGHT

Photometrics

Senso's in-house photometric testing ensures that our lighting design can match your needs precisely. Our Goniophotometer and testing lab produces on-demand photometry files based on any specified fixture, including LM-79 Test reports, IES Files, and CRI/CCT measurements. See Sensolighting.com for more information.

**Full photometric Reports and IES files available for every configuration*

Color Metrics

TM 30-15

Our clients deserve the best information possible about their lighting choices. That's why Senso has invested in the Illuminating Engineering Society (IES) TM 30-15, a new system that measures an LED light source's color rendering properties. Using Senso's state-of-the-art goniophotometer, this method identifies the optimal light source for your project and helps evaluate the trade-offs between efficacy and color rendering. Senso can provide TM 30-15 data for all of our products.

**Full Color Metric Info Available at Sensolighting.com*

LED Module Performance

Output: Up to 113 lumen/Watt
Efficacy: Color consistency within a 3-MacAdam Ellipse
CCT: 2500K - 6500K
Color Rendering: 93+ CRI
Min. R Values: R_9 - 60 R_f - 90 R_9 - 100


Driver and Power Consumption

Dimming: 1% dimming standard with 0.1% option
Casambi wireless control available
Ripple: Industry leading Low ripple
Efficiency: Power Factor >0.9
Efficiency over 85%
Class 2 output for safety
Installation: Remote mounted


Lumen Option	700lm	1000lm	1500lm	2000lm	3000lm	3500lm
Fixture Wattage	6.1W	9.1W	14W	19.8W	31.8W	34.6W
Delivered Lumen	656lm	1035lm	1539lm	1917lm	2986lm	3518lm

Leto Light Distribution: Reflector


10 Degree




18 Degree




30 Degree



45 Degree




60 Degree




Leto Light Distribution: Glass Optic

28 Degree domed glass



48 Degree domed glass



5 YEAR WARRANTY · TITLE 24 JA8 COMPLIANT · c UL us LISTED · RoHS · MADE IN CANADA

LETO 11


FAMILY

senso by luminii


Pendant

Standard

Leto 11



Leto 11.5




Asymmetric

*Leto 11 **A***




*Leto 11.5 **A***



Up-Down


*Leto 11 **UD***




Surface

Standard

*Leto 11 **S***



*Leto 11.5 **S***



Asymmetric

*Leto 11 **S A***




*Leto 11.5 **S A***




Wall Mount

Standard

*Leto 11 **WM***




*Leto 11.5 **WM***



Asymmetric

*Leto 11 **WM A***




*Leto 11.5 **WM A***




Up-Down

*Leto 11 **WM UD***



Low Bay

LBLP



LBHP



5 YEAR WARRANTY 5 YEAR WARRANTY E 24 LISTED RoHS MADE IN CANADA