


# LETO 1 WET

WET RATED RECESSED LED DOWNLIGHT

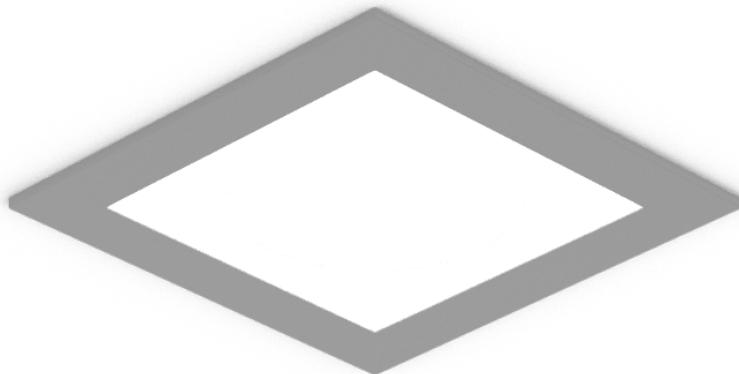

Leto 1 Single Wet - Wet Rated Recessed downlight. The Leto 1 Single Wet is the wet-rated version of the Leto 1 Single. The wet rating allows for installation with humid or damp conditions.

## Ordering Code

Fixture	673					
	1	2	3	4	5	6
Driver		673			--	--
	1	2	3	4	5	6

## Product Specifications

SAMPLE: Fixture 673 - A90 - 618 - 27 - 07 - 01 | Driver 910 - 673 - STD - 120 - A90 - 07

1 - Model	2 - LED	3 - Reflector	4 - CCT	5 - Lumen	6 - Finish	1 - Housing Style	
673 · Leto 1 Wet Rated	A90 · 93+ CRI Accuracy	618 · 18° 630 · 30° 645 · 45° 660 · 60°	25 · 2500K 27 · 2700K 30 · 3000K 35 · 3500K 40 · 4000K 65 · 6500K	07 · 700 (8.2W) 10 · 1000 (12.1W) 15 · 1500 (16.4W) 20 · 2000 (24.9W) 30 · 3000 (31.8W)	01 · White 02 · Black 08 · Silver XX · Custom	910 · Remote 915 · New Construction	
2 - Model	3 - Driver	Dim Level		Dim Level	4 - Line Voltage	5 - LED	6 - Lumen
673 · Leto 1	STD · Non Dimming LCS · 0 - 10 Volt Protocol DIM · Phase <sup>1</sup> ELDOLC · EldoLED 0 - 10 Volt <sup>2</sup> DALI · Dali Protocol <sup>2/3</sup>	N/A 1% 1% 0.1% 0.1%	LUTES · Hilume Ecodigital <sup>2</sup> LUT2W · 2 Wire for phase <sup>2</sup> DMX · SENSO <sup>2</sup> EMG · Emergency Driver <sup>2/3</sup> CSMB · Casambi Wireless Control <sup>2/3</sup>	1% 1% 347 · 347V <sup>4</sup>	120 · 120V 277 · 277V 347 · 347V <sup>4</sup>	Same as Fixture	Same as Fixture

<sup>1</sup> 120V only

<sup>2</sup> Requires remote housing

<sup>3</sup> Specified separately

<sup>4</sup> Not available with ELDOLC, Lutron or DMX

Project : \_\_\_\_\_

Quantity : \_\_\_\_\_

Type : \_\_\_\_\_

Notes : \_\_\_\_\_

# LETO 1 WET

WET RATED RECESSED LED DOWNLIGHT



## Photometrics

Senso's in-house photometric testing ensures that our lighting design can match your needs precisely. Our Goniophotometer and testing lab produces on-demand photometry files based on any specified fixture, including LM-79 Test reports, IES Files, and CRI/CCT measurements. See [Sensolighting.com](http://Sensolighting.com) for more information.

\*Full photometric Reports and IES files available for every configuration

## Color Metrics

### TM 30-15

Our clients deserve the best information possible about their lighting choices. That's why Senso has invested in the Illuminating Engineering Society (IES) TM 30-15, a new system that measures an LED light source's color rendering properties. Using Senso's state-of-the-art goniophotometer, this method identifies the optimal light source for your project and helps evaluate the trade-offs between efficacy and color rendering. Senso can provide TM 30-15 data for all of our products.

\*Full Color Metric Info Available at [Sensolighting.com](http://Sensolighting.com)

## LED Module Performance

Output: Up to 93 lumen/Watt

Efficacy: Color consistency within a 3-MacAdam Ellipse

CCT: 2500K - 6500K

Color Rendering: 93+ CRI

Min. R Values: R<sup>9</sup>- 60 R<sup>f</sup>- 90 R<sup>g</sup>- 100

## Driver and Power Consumption

Dimming: 1% dimming standard with 0.1% option

Casambi wireless control available

Ripple: Industry leading Low ripple

Efficiency: Power Factor >0.9

Efficiency over 85%

Class 2 output for safety

Installation: Remote mounted

Lumen Option	700lm	1000lm	1500lm	2000lm	3000lm
Fixture Wattage	8.2W	12.1W	16.4W	24.9W	31.8W
Delivered Lumen	500lm	700lm	1000lm	1500lm	2500lm


## Installation

- For new and retrofit installations
- Holds in place with two spring clips
- Simple connection between fixture and driver via quick connect

## Construction / Finish

- Custom finishes are available
- Cast Aluminum Trim and Steel Casing
- Wet Rated for humid or damp areas
- Made in Canada


## Dimensions



## Reflector

Faceted Reflector

Senso metal spun reflectors for function, low glare and efficiency




# LETO 1 WET


## WET RATED RECESSED LED DOWNLIGHT



### Standard Senso Housing - 910

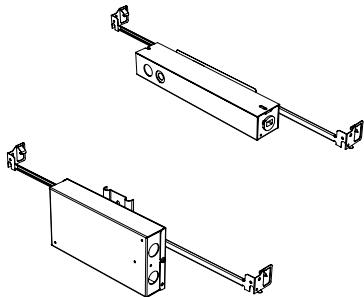

### Dimension

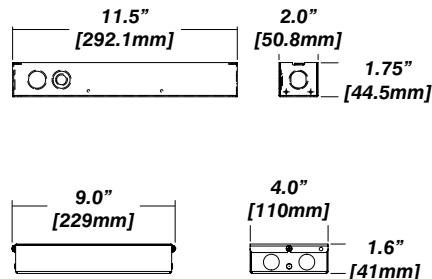

### Included


Unless specified otherwise, this is provided as standard

Bar hanger	• Length: from 14-3/16" to 26"
Driver with enclosure	• Galvanized steel enclosure
Security wire	• Flexible aircraft cable, 12" long
	• Easy to clip snap body included



\* driver can be installed either:

(A) laying on top of ceiling. (B) mounted to the bar hanger and fixed to the ceiling. (C) remote from the fixture, with the bar hanger still used if desired to secure the fixture

### New Construction - 915



### Dimension



### Included

Plaster Frame	• Galvanized steel construction with cut-out to
Bar hanger	• Length: from 14-3/16" to 26"
Security wire	• Flexible aircraft cable, 12" long
	• Easy to clip snap body included