



**Leto 21 Single - Recessed Adjustable downlight.** LETO 21 is a square trimless recessed LED fixture. It is fully adjustable to 30°, designed to be architecturally pleasing with trimless application. It can be used for general lighting, or to highlight specific design areas.

## Ordering Code

Fixture	<b>601</b>						
	1	2	3	4	5	6	
Driver		<b>601</b>			--	--	--
	1	2	3	4	5	6	7

## Product Specifications

**SAMPLE:** Fixture **601 - A90 - 618 - 27 - 07 - 01** | Driver **915 - 601 - STD - 120 - A90 - 07 - 01**

1 - Model	2 - LED	3 - Optic	4 - CCT	5 - Lumen	6 - Finish	1 - Housing Style	2 - Model
<b>601</b> · Leto 21 Single	<b>A90</b> · 93+ CRI Accuracy	<b>618</b> · 18° <b>630</b> · 30° <b>645</b> · 45° <b>660</b> · 60°	<b>25</b> · 2500K <b>27</b> · 2700K <b>30</b> · 3000K <b>35</b> · 3500K <b>40</b> · 4000K <b>65</b> · 6500K	<b>07</b> · 700 (7.5W) <b>10</b> · 1000 (10.8W) <b>15</b> · 1500 (16.7W) <b>20</b> · 2000 (22W) <b>30</b> · 3000 (33.7W)	<b>01</b> · White <b>02</b> · Black <b>08</b> · Silver <b>XX</b> · Custom	<b>915</b> · New Construction <b>920</b> · IC Housing* <sup>1</sup>	<b>601</b> · Leto 21 Single

3 - Driver	Dim Level	Dim Level	4 - Line Voltage	5 - LED	6 - Lumen	7 - Finish
<b>STD</b> · Non Dimming	N/A	<b>LUTES</b> · Hilume Ecodigital* <sup>3</sup>	1%	<b>120</b> · 120V	Same as	Same as
<b>LCS</b> · 0 - 10 Volt Protocol	1%	<b>LUT2W</b> · 2 Wire for phase* <sup>2/3</sup>	1%	<b>277</b> · 277V	Fixture	Fixture
<b>DIM</b> · Phase* <sup>2</sup>	10%	<b>DMX</b> · SENSO* <sup>3</sup>		<b>347</b> · 347V* <sup>5</sup>		
<b>ELDOLC</b> · EldoLED 0 - 10 Volt* <sup>3</sup>	0.1%	<b>EMG</b> · Emergency Driver* <sup>3/4</sup>				
<b>DALI</b> · Dali Protocol* <sup>3</sup>	0.1%	<b>CSMB</b> · Casambi Wireless Control* <sup>3/4</sup>				

\*1 Cannot exceed 1500lm

\*2 120V only

\*3 Requires remote housing

\*4 Specified separately

\*5 Not available with ELDO, Lutron or DMX

Project : \_\_\_\_\_

Quantity : \_\_\_\_\_

Type : \_\_\_\_\_

Notes : \_\_\_\_\_

## Photometrics

Senso's in-house photometric testing ensures that our lighting design can match your needs precisely. Our Goniophotometer and testing lab produces on-demand photometry files based on any specified fixture, including LM-79 Test reports, IES Files, and CRI/CCT measurements. See [Sensolighting.com](http://Sensolighting.com) for more information.

*\*Full photometric Reports and IES files available for every configuration*

## Color Metrics

### TM 30-15

Our clients deserve the best information possible about their lighting choices. That's why Senso has invested in the Illuminating Engineering Society (IES) TM 30-15, a new system that measures an LED light source's color rendering properties. Using Senso's state-of-the-art goniophotometer, this method identifies the optimal light source for your project and helps evaluate the trade-offs between efficacy and color rendering. Senso can provide TM 30-15 data for all of our products.

*\*Full Color Metric Info Available at [Sensolighting.com](http://Sensolighting.com)*

## Light Engine

**Output:** up to 3000lm

**High Efficacy:** up to 92 lumen/Watt

**Color Options (CCT):** 2500K, 2700K, 3000K, 3500K, 4000K or 6500K

**Color Consistency:** Range within a 3-MacAdam Ellipse

**Color rendering (CRI):** 93+ CRI & 50+ R9 Value

## Driver and Power Consumption

**Dimming:** 1% dimming standard with 0.1% option

**Ripple:** Industry leading Low ripple

**Efficiency:** Power Factor >0.9

Efficiency over 85%

Class 2 output for safety

Lumen Option	700lm	1000lm	1500lm	2000lm	3000lm
Fixture Wattage	7.5W	10.8W	16.7W	22W	33.7W
Delivered Lumen	683lm	992lm	1474lm	1935lm	2798lm




## Installation

- For new installations only
- Fully 30° angle adjustable spot, 360° rotation
- Simple connection between fixture and driver via quick connect
- Available for wet rated in single version.

## Construction / Finish

- Custom finishes are available
- Cast Aluminum Trim and Steel Casing
- Made in Canada


## Dimensions

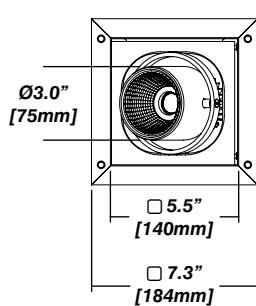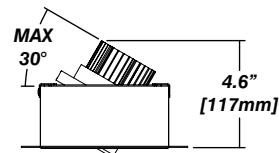

## Reflector


### Faceted Reflector

Senso metal spun reflectors for function, low glare and efficiency




## Housing Options

### New Construction - 915

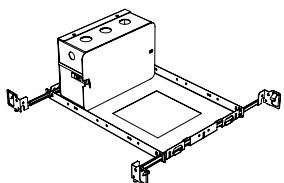

### Dimension

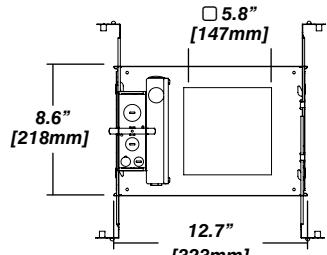


### Included

**Plaster Frame** • Galvanized steel construction with cut-out to


**Bar hanger** • Length: from 14-3/16" to 26"

**Security wire** • Flexible aircraft cable, 12" long  
• Easy to clip snap body included

### IC Housing - 920

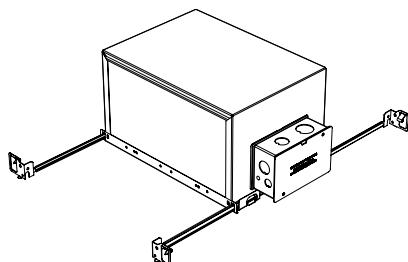

### Dimension

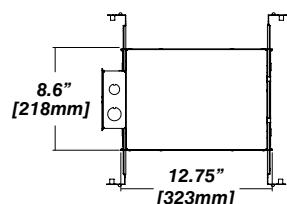

### Included

**IC Housing** • Galvanized steel construction  
• Airtight  
• Includes gasketed junction box

**Plaster Frame** • Galvanized steel construction

**Bar hanger** • Length: from 14-3/16" to 26"

**Note:** use only with LED modules up to 1500lm

