

LETO 22

TRIMLESS RECESSED LED DOWNLIGHT



Leto 22 - Recessed downlight. LETO 22 is a square trimless recessed LED fixture with a small round aperture that permits refined glare control and precision light distribution.

Ordering Code

Fixture	603						
	1	2	3	4	5	6	
Driver		603			--	--	--
	1	2	3	4	5	6	7

Product Specifications

SAMPLE: Fixture **603 - A90 - 618 - 27 - 07 - 01** | Driver **915 - 603 - STD - 120 - A90 - 07 - 01**

1 - Model	2 - LED	3 - Optic	4 - CCT	5 - Lumen	6 - Finish	1 - Housing Style	2 - Model
603 · Leto 22	A90 · 93+ CRI Accuracy	618 · 18° 630 · 30° 645 · 45° 660 · 60°	27 · 2700K 30 · 3000K 35 · 3500K 40 · 4000K	07 · 700 (8.2W) 10 · 1000 (11.2W) 15 · 1500 (18.2W) 20 · 2000 (24.9W) 30 · 3000 (34.6W)	01 · White 02 · Black 08 · Silver XX · Custom	915 · New Construction	603 · Leto 22

3 - Driver	Dim Level	Dim Level	4 - Line Voltage	5 - LED	6 - Lumen	7 - Finish
STD · Non Dimming	N/A	LUTES · Hilume Ecodigital ^{*2}	1%	120 · 120V	Same as	Same as
LCS · 0 - 10 Volt Protocol	1%	LUT2W · 2 Wire for phase ^{*1/2}	1%	277 · 277V	Fixture	Fixture
DIM · Phase ^{*1}	10%	DMX · SENSO ^{*2}		347 · 347V ^{*4}		
ELDOLC · EldoLED 0 - 10 Volt ^{*2}	0.1%	EMG · Emergency Driver ^{*2/3}				
DALI · Dali Protocol ^{*2}	0.1%	CSMB · Casambi Wireless Control ^{*2/3}				

*1 120V only
 *2 Requires remote housing
 *3 Specified separately
 *4 Not available with ELDO, Lutron or DMX

Project : _____
 Quantity : _____
 Type : _____
 Notes : _____

LETO 22

TRIMLESS RECESSED LED DOWNLIGHT

Photometrics

Senso's in-house photometric testing ensures that our lighting design can match your needs precisely. Our Goniophotometer and testing lab produces on-demand photometry files based on any specified fixture, including LM-79 Test reports, IES Files, and CRI/CCT measurements. See Sensolighting.com for more information.

**Full photometric Reports and IES files available for every configuration*

Color Metrics

TM 30-15

Our clients deserve the best information possible about their lighting choices. That's why Senso has invested in the Illuminating Engineering Society (IES) TM 30-15, a new system that measures an LED light source's color rendering properties. Using Senso's state-of-the-art goniophotometer, this method identifies the optimal light source for your project and helps evaluate the trade-offs between efficacy and color rendering. Senso can provide TM 30-15 data for all of our products.

**Full Color Metric Info Available at Sensolighting.com*

Light Engine

Output: up to 3000lm

High Efficacy: up to 85 lumen/Watt

Color Options (CCT): 2500K, 2700K, 3000K, 3500K, 4000K or 6500K

Color Consistency: Range within a 3-MacAdam Ellipse

Color rendering (CRI): 93+ CRI & 50+ R9 Value

Driver and Power Consumption

Dimming: 1% dimming standard with 0.1% option

Ripple: Industry leading Low ripple

Efficiency: Power Factor >0.9

Efficiency over 85%

Class 2 output for safety

Lumen Option	700lm	1000lm	1500lm	2000lm	3000lm
Fixture Wattage	8.2W	11.2W	18.2W	24.9W	34.6W
Delivered Lumen	698lm	923lm	1433lm	1808lm	2708lm




Installation

- For new installations only
- Simple connection between fixture and driver via quick connect

Construction / Finish

- Custom finishes are available
- Cast Aluminum Trim and Steel Casing
- Made in Canada


Dimensions

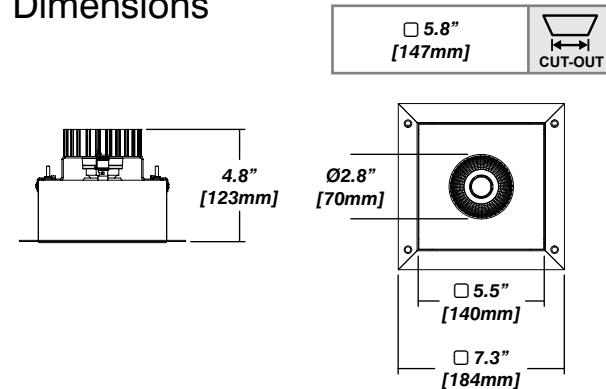

Reflector

Faceted Reflector

Senso metal spun reflectors for function, low glare and efficiency

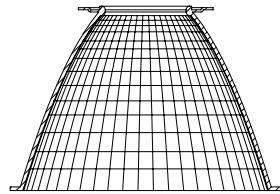


LETO 22



TRIMLESS RECESSED LED DOWNLIGHT Housing Options



New Construction - 915

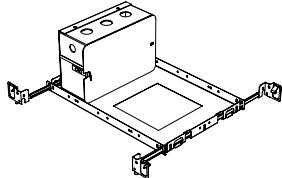

Dimension

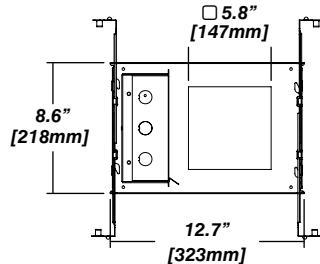

Included

Plaster Frame • Galvanized steel construction with cut-out to

Bar hanger • Length: from 14-3/16" to 26"

Security wire • Flexible aircraft cable, 12" long

• Easy to clip snap body included