

LETO 24

TRIMLESS RECESSED LED DOWNLIGHT



Leto 24 - Recessed downlight. LETO 24 is a trimless recessed, square, wall-washer fixture that create an even, non-scalloped wall-washing effect.

Ordering Code

| | | | | | | |
|---------|------------|------------|---|---|----|----|
| Fixture | 607 | | | | | |
| | 1 | 2 | 3 | 4 | 5 | 6 |
| Driver | | 607 | | | -- | -- |
| | 1 | 2 | 3 | 4 | 5 | 6 |

Product Specifications

SAMPLE: Fixture **607 - 90 - 618 - 27 - 07 - 01** | Driver **915 - 607 - STD - 120 - 90 - 07 - 01**

| 1 - Model | 2 - LED | 3 - Optic | 4 - CCT | 5 - Lumen | 6 - Finish | 1 - Housing Style |
|----------------------|-------------------------------|------------------|--|--|--|-------------------------------|
| 607 · Leto 24 | A90 · 93+ CRI Accuracy | 618 · 18° | 25 · 2500K 27 · 2700K 30 · 3000K 35 · 3500K 40 · 4000K 65 · 6500K | 07 · 700 (8.2W) 10 · 1000 (12.1W) 15 · 1500 (22W) 20 · 2000 (29.4W) | 01 · White 02 · Black 08 · Silver XX · Custom | 915 · New Construction |

| 2 - Model | 3 - Driver | Dim Level | Dim Level | 4 - Line Voltage | 5 - LED | 6 - Lumen |
|----------------------|---|----------------------------------|--|---|-----------------|-----------------|
| 607 · Leto 24 | STD · Non Dimming LCS · 0 - 10 Volt Protocol DIM · Phase* ¹ ELDOLC · EldoLED 0 - 10 Volt* ² DALI · Dali Protocol* ² | N/A 1% 10% 0.1% 0.1% | LUTES · Hilume Ecodigital* ² LUT2W · 2 Wire for phase* ^{1/2} DMX · SENSO* ² EMG · Emergency Driver* ^{2/3} CSMB · Casambi Wireless Control* ^{2/3} | 120 · 120V 277 · 277V 347 · 347V* ⁴ | Same as Fixture | Same as Fixture |

*1 120V only

*2 Requires remote housing

*3 Specified separately

*4 Not available with ELDO, Lutron or DMX

Project : _____
 Quantity : _____
 Type : _____
 Notes : _____



LETO 24

TRIMLESS RECESSED LED DOWNLIGHT



Photometrics

Senso's in-house photometric testing ensures that our lighting design can match your needs precisely. Our Goniophotometer and testing lab produces on-demand photometry files based on any specified fixture, including LM-79 Test reports, IES Files, and CRI/CCT measurements. See Sensolighting.com for more information.

**Full photometric Reports and IES files available for every configuration*

Color Metrics

TM 30-15

Our clients deserve the best information possible about their lighting choices. That's why Senso has invested in the Illuminating Engineering Society (IES) TM 30-15, a new system that measures an LED light source's color rendering properties. Using Senso's state-of-the-art goniophotometer, this method identifies the optimal light source for your project and helps evaluate the trade-offs between efficacy and color rendering. Senso can provide TM 30-15 data for all of our products.

**Full Color Metric Info Available at Sensolighting.com*

Light Engine

Output: up to 2000lm

High Efficacy: up to 74 lumen/Watt

Color Options (CCT): 2500K, 2700K, 3000K, 3500K, 4000K or 6500K

Color Consistency: Range within a 3-MacAdam Ellipse

Color rendering (CRI): 93+ CRI & 50+ R9 Value

Driver and Power Consumption

Dimming: 1% dimming standard with 0.1% option

Ripple: Industry leading Low ripple

Efficiency: Power Factor >0.9

Efficiency over 85%

Class 2 output for safety

| Lumen Option | 700lm | 1000lm | 1500lm | 2000lm |
|-----------------|-------|--------|--------|--------|
| Fixture Wattage | 8.2W | 12.1W | 22W | 29.4W |
| Delivered Lumen | 613lm | 906lm | 1494lm | 2043lm |


Installation

- For new installations only
- Simple connection between fixture and driver via quick connect
- 18° reflector with 18° fixed tilt angle

Construction / Finish

- Custom finishes are available
- Cast Aluminum Trim and Steel Casing
- Made in Canada


Dimensions

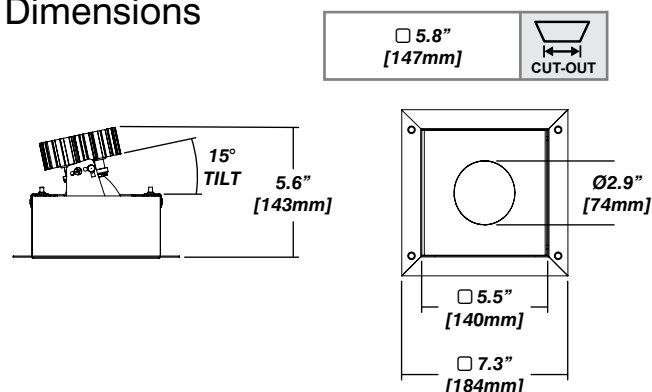

Reflector

Faceted Reflector

Senso metal spun reflectors for function, low glare and efficiency




LETO 24


TRIMLESS RECESSED LED DOWNLIGHT
Housing Options



New Construction - 915



Dimension

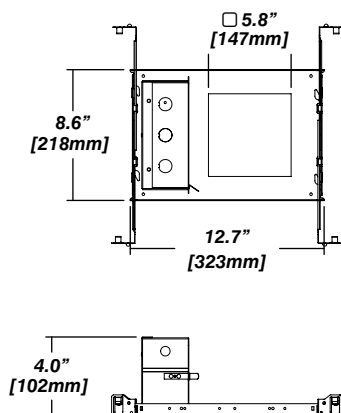

Included

- Plaster Frame** • Galvanized steel construction with cut-out to
- Bar hanger** • Length: from 14-3/16" to 26"
- Security wire** • Flexible aircraft cable, 12" long
- Easy to clip snap body included