

LETO 44 Mini T

TRACK LED SPOTLIGHT



Leto 44 Mini T - Track LED Spotlight. LETO 44 Mini T is a track version of the Medium Leto 44 Mini. It offers an articulating, short-stem spotlight combined with a versatile and efficient LED. Excels in display based spaces like galleries, industrial and retail.

Ordering Code

Fixture	664							
	1	2	3	4	5	6	7	8
Driver								
	1	2	3	4				

Product Specifications

SAMPLE: Fixture **664 - A90 - 617 - 27 - 07 - 00 - 01 - 01** | Driver **STD - 120 - A90 - 07**

1 - Model	2 - CRI/LED	3 - Optic	4 - CCT	5 - Lumen	6 - Accessory
664 • Leto 44 Mini One Circuit	A90 • 93+ CRI Accuracy WD • Warm Dimming ^{*WD} (90 CRI)	617 • 17° 630 • 30° 645 • 45°	25 • 2500K 27 • 2700K 30 • 3000K ^{*WD} 35 • 3500K 40 • 4000K 65 • 6500K	07 • 700 (6.1W) ^{*WD} 10 • 1000 (9.1W) ^{*WD} 15 • 1500 (14W)	00 • No Accessory DL • Diffusing Film HO • Honeycomb
665 • Leto 44 Mini Two Circuit					
666 • Leto 44 Mini ^{††} Three Circuit					

7 - Body Color		8 - Baffle Color		1 - Driver		Dim Level	2 - Voltage	3 - CRI/LED	4 - Lumen
<i>Standard</i>	<i>Premium</i>	<i>Standard</i>	<i>Premium</i>	<i>STD</i> • Non Dimming	N/A		<i>120</i> • 120V	Same as Fixture	Same as Fixture
<i>01</i> • White	<i>52</i> • Mocha	<i>01</i> • White	<i>52</i> • Mocha	<i>LCS</i> • 0 - 10 Volt Protocol ^{*WD}	1%		<i>277</i> • 277V		
<i>02</i> • Black	<i>53</i> • Charcoal	<i>02</i> • Black	<i>53</i> • Charcoal	<i>DIM</i> • Phase ^{*†}	1%				
<i>08</i> • Silver	<i>54</i> • Cerulean	<i>08</i> • Silver	<i>54</i> • Cerulean						
	<i>55</i> • Firebrick		<i>55</i> • Firebrick						
	<i>BZ</i> • Bronze		<i>BZ</i> • Bronze						
	<i>WN</i> • Warm Nickel		<i>WN</i> • Warm Nickel						
	<i>AB</i> • Aged Brass		<i>AB</i> • Aged Brass						
	<i>XX</i> • RAL		<i>XX</i> • RAL						

*† 120V only

*WD Must select when specifying **WD** - Warm Dimming

LETO 44 Mini T

TRACK LED SPOTLIGHT

 **senso**
by luminii

LED Module Performance

Output: up to 1500lm
High Efficacy: up to 110 lumen/Watt
Color Options (CCT): 2500K, 2700K, 3000K, 3500K, 4000K, 6500K
Color Consistency: Range within a 3-MacAdam Ellipse
Color rendering (CRI): 93+ CRI & 50+ R9 Value

Driver and Power Consumption

Dimming: 1% dimming standard
Ripple: Industry leading Low ripple
Efficiency: Power Factor >0.9
Efficiency over 85%
Class 2 output for safety

Lumen Option	700lm	1000lm	1500lm
Fixture Wattage	6.1W	9.1W	14W
Delivered Lumen	668lm	1002lm	1441lm

Light Engine: Warm Dimming


Output: 1000lm
High Efficacy: up to 98 lumen/Watt
Color Temperature (CCT): 3000K dimmed to 1800K
Color Consistency: Range within a 3-MacAdam Ellipse
Color rendering (CRI): 90 CRI

Driver

Dimming: 1% dimming standard with 0.1% option
Dimmer switch must be capable of dimming less than 5% (Lutron DIVA is recommended)
Ripple: Industry leading Low ripple
Efficiency: Power Factor >0.9
Efficiency over 85%
Class 2 output for safety
Installation: Small Footprint allows retrofit installations

1 / 2 / 3 Circuit Switch

When the track is connected to a two or three-circuit system, it is possible to select the phase (L1, L2 or L3) of each luminaire in your system using the selector under the adapter.

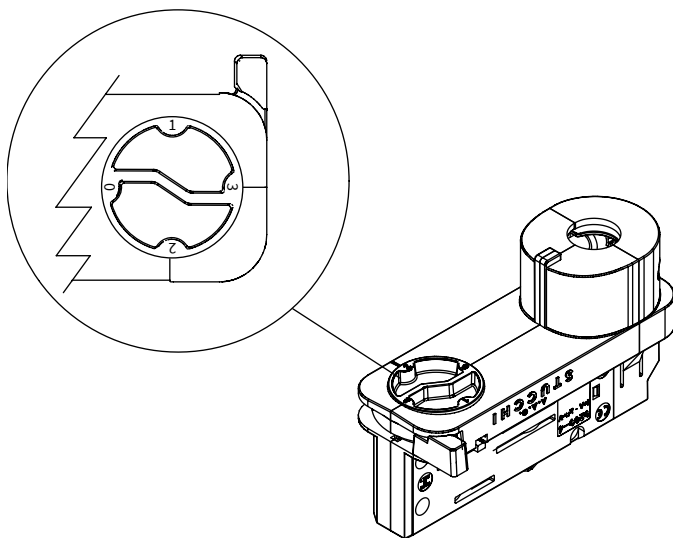


Installation

- 358° rotation
- 0° to 90° tilt
- Includes track adapter (single or dual phase)

Construction

- Machined aluminum construction
- High quality, scratch resistant powder coated finish in standard, premium or custom colors
- Made in Canada

Dimensions

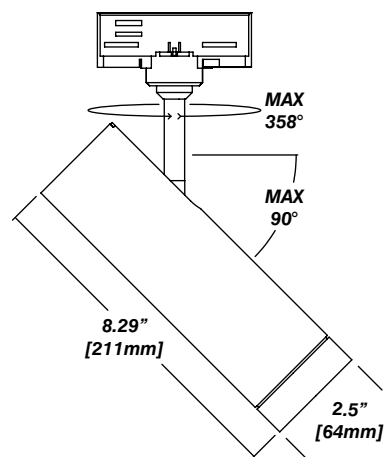


LETO 44 Mini T

TRACK LED SPOTLIGHT


 **senso**
by luminii

Standard Finishes

01 - White



02 - Black



08 - Silver



Premium Finishes

55 - Mocha



56 - Charcoal



57 - Cerulean



58 - Firebrick



BZ - Bronze



WN - Warm Nickle



AB - Aged Brass



Accessories

Diffusing Film



Honeycomb

