


It is well established that traditional forms of artificial light can disrupt sea turtle hatching patterns and disorient hatchlings. Our **FWC (Florida Wildlife Commission)** certified luminaires feature carefully crafted 590nm LEDs that, when used in conjunction with proper shielding, can help create a safer space for sea turtles and other wildlife.



Product Image

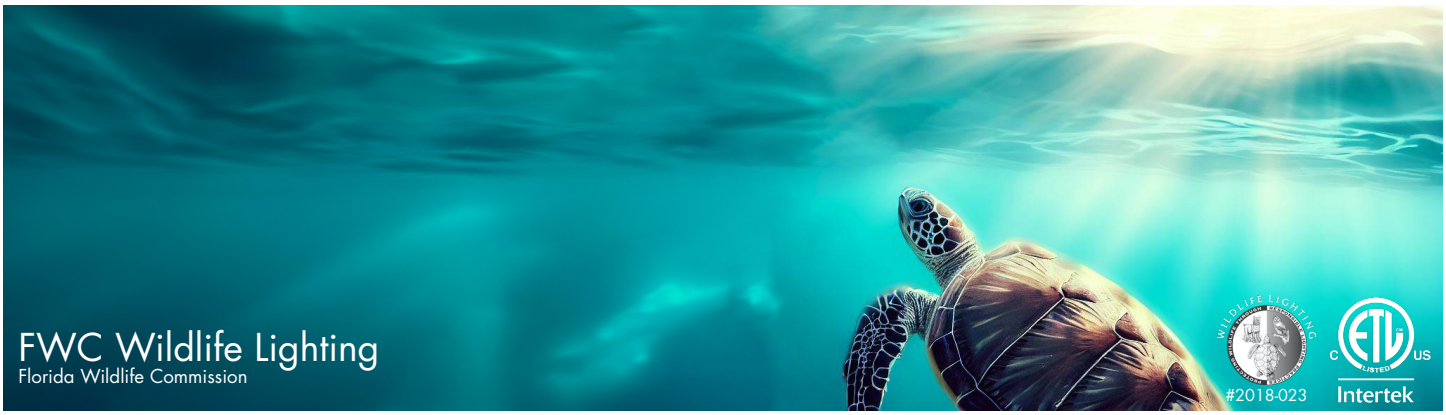

Declare. RoHS

Features

IP68 rated for Wet Location

Approved for use in proximity to wildlife

72 lm/ft; 27 lm/Watt


Carefully crafted 590nm LEDs

Suggested Applications


Handrail	Corner
Cove	Surface Mount
Recessed	

SECTION START/END OPTIONS


72" Soldered leads (SL65)




Female quick connect end (F)



72" Soldered leads (SL68)




Male quick connect end (M)



No connector (NC)
IP65 model only



No connector (NC)
IP68 model only



Ordering code

MODEL		SECTION START		SECTION END		LENGTH
	–		–		–	
LL36-WL		**SL65** - IP65 Soldered lead wires (72") **SL68** - IP68 Soldered lead wires (72") **F** - Female connector **M** - Male connector **NC** - No connector		**SL65** - IP65 Soldered lead wires (72") **SL68** - IP68 Soldered lead wires (72") **F** - Female connector **M** - Male connector **NC** - No connector		Lengths specified to the inch; ordering code rounded up to one-foot increments. See chart on next page for max run length

Technical information

Electrical

Input Voltage	24VDC
Power Consumption	3.0 Watts per foot (36 LEDs per foot)
Wire Size	18AWG, 2 wire
Certification	**ETL** - Conforms to UL Std. 2108; Certified to CSA Std. C22.2 No. 9.0. **FWC Wildlife Lighting (#2018-023) -** Approved for use in proximity to wildlife. **Class 2**

Lumen Output

Amber	72.00 lm/ft 27.00 lm/Watt

Note: Stated lumen values have a tolerance of +/- 10%.

Physical


Ordering Increment	1.97" (50.00mm)
Operating Temperature	-40°F (-40° C) to +158°F (+70°C)
Environment	Wet Location
Maximum Run Length	32.00' (6096.00mm)
Dimensions	0.47" (11.94mm) x 0.19" (4.88mm) **Endcaps** - 0.58" (14.73mm) x 0.31" (7.87mm)


Performance

Wavelength	590 nm
Lumen Maintenance	50,000 Hours
Warranty	5 Years


Dimensions

LL36-WL

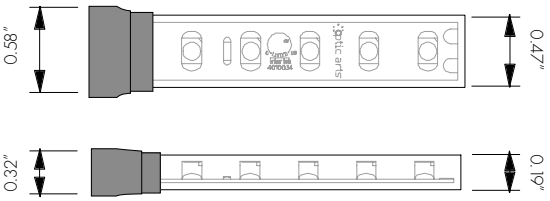

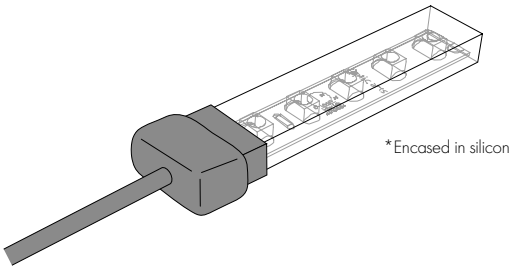


Dimensions	
Width	0.47" (11.94mm)
Height	0.19" (4.88mm)
Width (Endcap)	0.58" (14.73mm)
Height (Endcap)	0.31" (7.87mm)
Max Run Length	32.00' (6096.00mm)

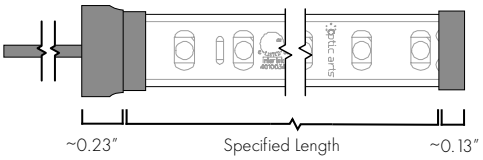

Accessories


LL.ZIP

Strain Relief Clip

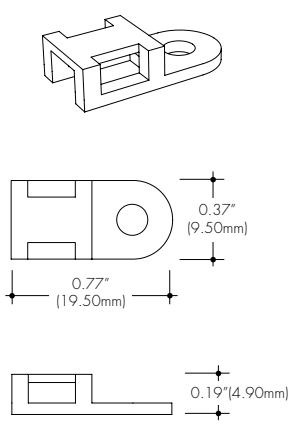


FLEXMNT-SIL-EXT12

Outdoor Mounting Clip

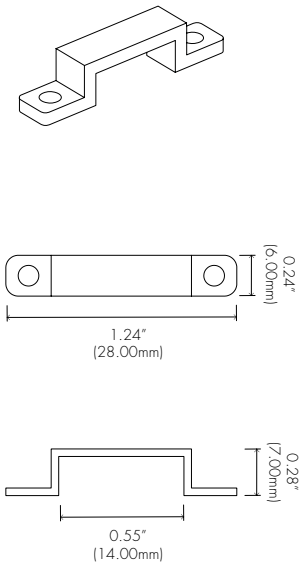


TM-30 - 1800K

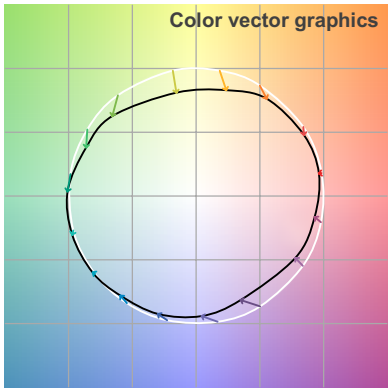


		Graphic shifts (%)	
Hue Bin	R_f	Chroma	Hue
1	93	-2%	0%
2	87	-3%	-5%
3	77	-6%	-10%
4	80	-14%	-8%
5	86	-17%	1%
6	73	-11%	13%
7	77	-7%	12%
8	80	0%	14%
9	93	1%	3%
10	95	1%	-2%
11	87	-2%	-7%
12	85	-3%	-8%
13	82	-7%	-11%
14	83	-13%	-10%
15	87	-8%	2%
16	88	-6%	3%

TM-30 - 2350K

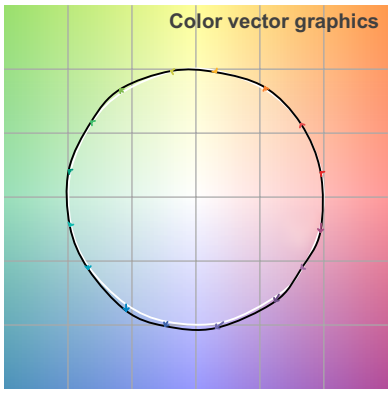


		Graphic shifts (%)	
Hue Bin	R_f	Chroma	Hue
1	96	-1%	1%
2	97	0%	1%
3	94	1%	2%
4	95	-1%	-1%
5	95	0%	1%
6	94	3%	1%
7	95	1%	0%
8	97	2%	-1%
9	96	1%	2%
10	96	1%	2%
11	92	4%	3%
12	93	4%	-1%
13	91	3%	-7%
14	90	3%	-6%
15	95	0%	-2%
16	90	1%	-7%

TM-30 - 2750K

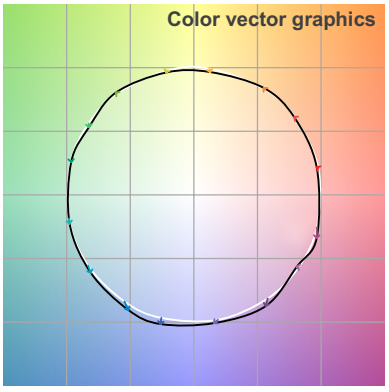


		Graphic shifts (%)	
Hue Bin	R_f	Chroma	Hue
1	95	-1%	1%
2	97	0%	1%
3	95	0%	2%
4	93	-3%	-1%
5	95	-1%	1%
6	97	1%	0%
7	92	-2%	2%
8	98	0%	1%
9	93	0%	4%
10	90	1%	6%
11	89	4%	6%
12	91	5%	0%
13	94	2%	-3%
14	91	4%	-5%
15	94	-1%	-1%
16	88	1%	-8%

TM-30 - 2930K

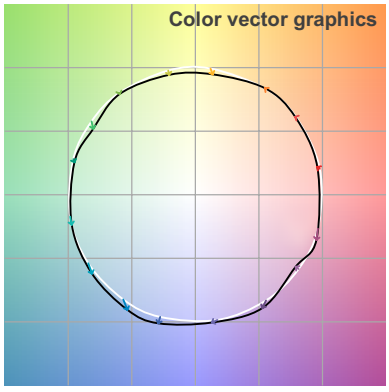

		Graphic shifts (%)	
Hue Bin	R_f	Chroma	Hue
1	93	-2%	2%
2	95	0%	1%
3	95	0%	1%
4	91	-4%	-3%
5	94	-3%	0%
6	96	-1%	0%
7	89	-4%	4%
8	95	-1%	2%
9	89	0%	6%
10	86	2%	8%
11	87	5%	7%
12	90	5%	0%
13	93	1%	-5%
14	90	3%	-6%
15	91	-3%	0%
16	87	1%	-9%

TM-30 - 3550K

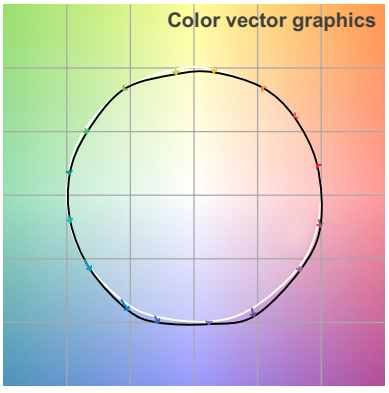

		Graphic shifts (%)	
Hue Bin	R_f	Chroma	Hue
1	95	0%	1%
2	97	0%	0%
3	95	0%	1%
4	93	-2%	0%
5	91	-4%	0%
6	96	0%	1%
7	94	-3%	2%
8	95	-1%	2%
9	91	-1%	5%
10	86	0%	9%
11	85	4%	9%
12	89	4%	3%
13	96	2%	-1%
14	92	6%	-2%
15	91	2%	-2%
16	89	2%	-5%

Power Supplies

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

For use with Static White

Ordering Code - Universal Dimming Power Supplies 0.1% 120VAC - 277VAC


MODEL		INPUT CONTROL		WATTAGE		OUTPUT
	–		–		–	
PS - Power Supply, 120-277VAC		UNI - 0-10V Dimming (0.1%), Phase Dimming (0.1%)		30 - 30 Watts 60 - 60 Watts 96 - 96 Watts 3x96 - 3x96 Watts		24 - 24 VDC

Compatibility: View a complete list of compatible dimmers on the PS-UNI product page.


0-10V - 0.1% dimming
MLV/ELV/TRIAC - 0.1% dimming, consult dimming compatibility chart

MODELS	PS-UNI-30W	PS-UNI-60W	PS-UNI-96W	PS-UNI-3X96W
Length	6.50"	7.40"	8.66"	11.85"
Width	3.73"	3.73"	3.73"	4.32"
Depth	1.61"	1.61"	1.61"	1.81"

PS-UNI-30/60/96

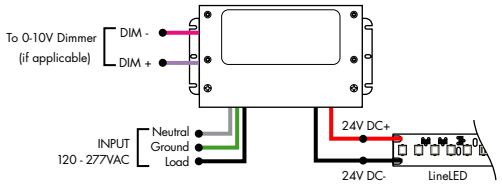

PS-UNI-3X96

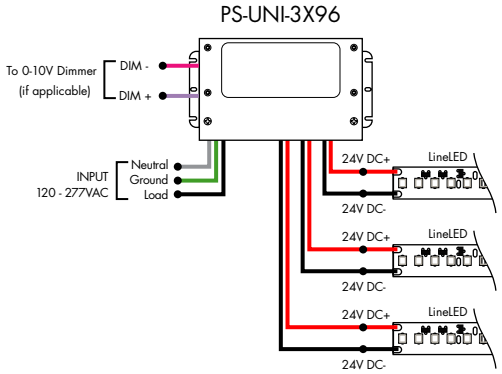


For use with Static White


Ordering Code - 0-10V Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL		INPUT CONTROL		ENVIRONMENT		WATTAGE		OUTPUT
	-		-		-		-	
PS - Power Supply, 120-277VAC		010V-LIN - 0-10V Dimming (0.1%), Linear 010V-LOG - 0-10V Dimming (0.1%), Logarithmic		D - Dry		96 - 96 Watts 3x96 - 3x96 Watts		24 - 24 VDC

MODELS	96W	3X96
Length	14.40"	15.00"
Width	5.20"	6.62"
Depth	2.60"	4.45"

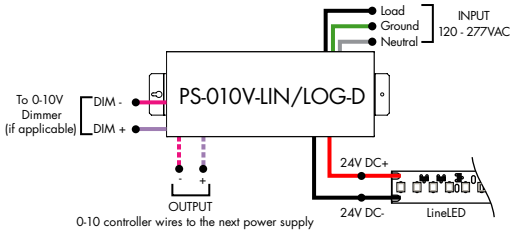

PS-010V-LIN/LOG-D-3X96

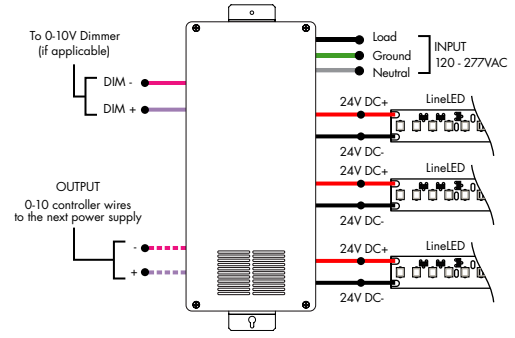


Power Supplies

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

For use with Static White

Ordering Code - Athena 0-10V LED Driver

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT	FEATURE
PS - Power Supply, 120-277VAC	010V-LIN - 0-10V Dimming (0.1%), Linear 010V-LOG - 0-10V Dimming (0.1%), Logarithmic	D - Dry	96 - 96 Watts	24 - 24 VDC	AWNR - Athena

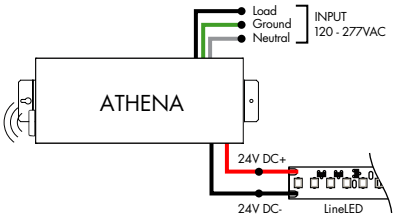


MODELS	96W
Length	14.40"
Width	5.20"
Depth	2.60"

For use with Static White

Ordering Code - DALI 2 Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS - Power Supply, 120-277VAC	DALI2-DT6 - DALI2 DT6 (0.1%)	D - Dry	96 - 96 Watts	24 - 24 VDC

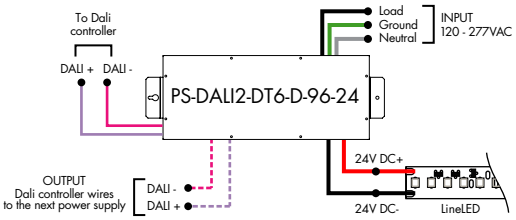


Model	96W
Length	14.40"
Width	5.20"
Depth	2.60"


For use with Static White

Ordering Code - DALI Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS - Power Supply, 120-277VAC	DALI - DALI (0.1%)	D - Dry	96 - 96 Watts 3x96 - 3x96 Watts	24 - 24 VDC

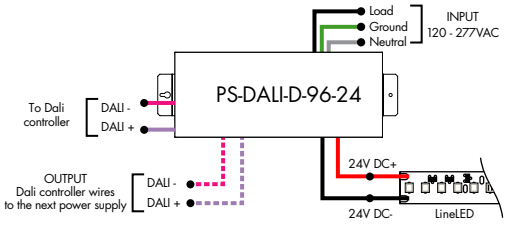

PS-DALI-D-3X96-24

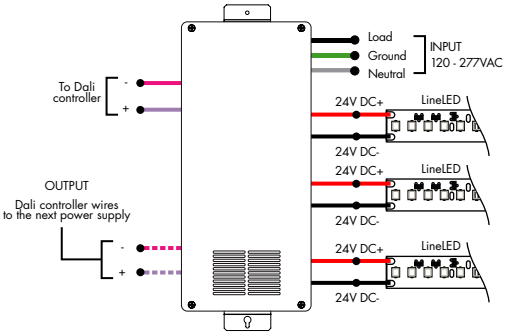

Model	96W	3X96
Length	14.40"	15.00"
Width	5.20"	6.62"
Depth	2.60"	4.56"

Power Supplies

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.


For use with Static White


Ordering Code - DMX Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS-Power Supply, 120-277VAC	DMX-DMX (0.1%)	D-Dry	96-96 Watts 3x96-3x96 Watts	24-24 VDC

MODELS	96W	3X96
Length	14.40"	15.00"
Width	5.20"	6.62"
Depth	2.60"	4.56"

ZONAL CONTROL POWER SUPPLIES.
CONTROL MULTIPLE TAPES/ZONES USING DMX CHANNELS.

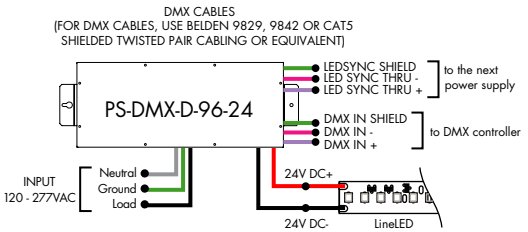

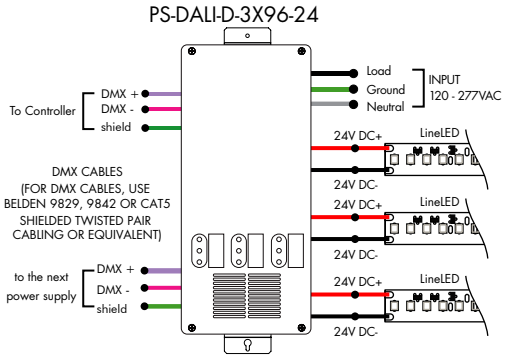


For use with Static White

Ordering Code - Non-Dimming Power Supply, 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS-Power Supply, 120-277VAC	ND-Non Dimming	D-Dry	96-96 Watts	24-24 VDC

MODELS	96W
Length	14.40"
Width	5.20"
Depth	2.60"

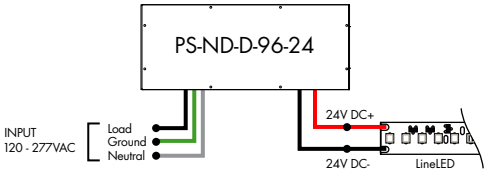


For use with Static White

Ordering Code - In-Ground Power Supplies

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS120-Power Supply, 120VAC PS240-Power Supply, 240VAC PS277-Power Supply, 277VAC	ELV-ELV Dimming (1%)	IG-In Ground	2X96-2X96 Watts	24-24 VDC

MODELS	2X96W
Length	8.40"
Width	8.30"
Depth	8.10"

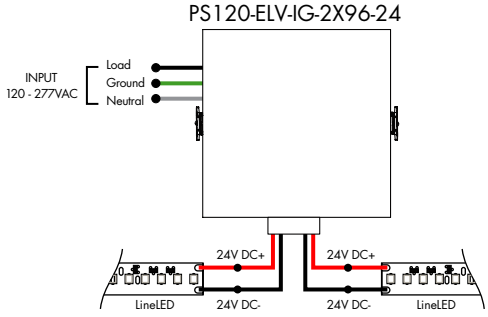

Power Supplies

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

LUTRON®

Luminii is a Lutron OEM Advantage Partner

Lutron Power Supplies 1%


MODEL

L3DA4U1UKL-CV240

Hi-lume™ 1% EcoSystem Voltage LED driver 40W max

MODELS	L3DA4U1UKL-CV240
Length	4.98"
Width	4.00"
Depth	2.62"

L3DA4U1UKN-CV240

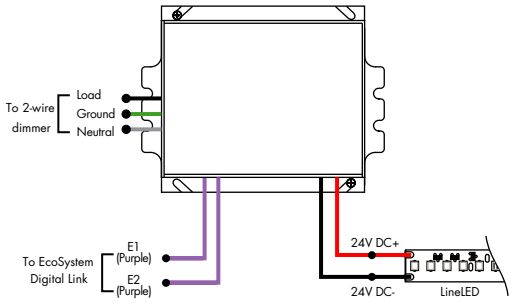

LUTRON®

Luminii is a Lutron OEM Advantage Partner

Lutron Power Supplies 0.1%

MODEL

L3D0-96W24V-U

Hi-lume™ 0.1% EcoSystem Voltage LED Driver with Soft-On, Fade-to-Black™ 96W max

MODELS	L3D0
Length	10.50"
Width	5.50"
Depth	2.00"

