

LETO 11 ADJ

ADJUSTABLE SUSPENDED CYLINDER



Features

- 360° rotation and up to 30° total tilt.
- Field interchangeable faceted metal reflectors and TIR optics provide adjustable beam spreads between 15° to 60°.
- Six output options available up to 3500 lumens.
- Nine driver selections available to cover a wide range of applications.
- Five year warranty.



Finish Options



Declare.



Made in Canada
with Imported Parts

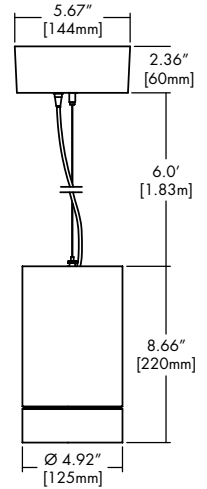

Technical Information

OUTPUT OPTIONS	700 lm	1000 lm	1500lm	2000lm	3000lm	3500lm
Fixture wattage	6.1 W	9.1 W	14.0 W	19.8 W	31.8 W	35.9 W
Delivered Lumen at 3500K	721 lm	1067 lm	1604 lm	2180 lm	3155 lm	3496 lm
Efficacy	118 lm/W	117 lm/W	115 lm/W	110 lm/W	99 lm/W	97 lm/W
Center Beam Candlepower (20° Faceted Reflector)	3123 cd	4621 cd	6947 cd	9442 cd	13665 cd	15142 cd

CCT	Multiplier	CRI	TM-30		
			R _f	R _g	R ₉
2500K	0.81	92	90	104	77
2700K	0.92	92	91	102	61
3000K	0.97	95	92	102	61
3500K	1.00	95	93	101	72
4000K	1.07	95	92	103	68
6500K	1.05	96	91	100	89

Integral Driver Example: Fixture LET11A-S-07-25K-F20-NA-WH-WH-RD-WH-2AF-NA-PHSD-NA

Remote Driver Example: Fixture LET11A-S-07-25K-F20-NA-WH-WH-RD-WH-2AF-NA-PHSD-NA

HRM-LET11A-S-07-25K-PHSD-NA

Ordering Code

Fixture

MODEL	TYPE	OUTPUT	CCT	OPTIC	ACCESSORY*	BODY FINISH	BAFFLE FINISH
LET11A-Leto 11 Adjustable	S-Suspended	07-700 lumens (6.1W) ¹ 10-1000 lumens (9.1W) 15-1500 lumens (14.0W) 20-2000 lumens (19.8W) 30-3000 lumens (31.8W) 35-3500 lumens (34.6W)	25K-2500K 27K-2700K 30K-3000K 35K-3500K 40K-4000K 65K-6500K	F20-20 Degree, Faceted F30-30 Degree, Faceted F45-45 Degree, Faceted F60-60 Degree, Faceted T15-15 Degree, TIR ² T20-23 Degree, TIR ² T30-36 Degree, TIR ²	NA-No Accessory CL-Clear Lens DL-Diffusing Lens HC-Honeycomb Louver SL-Solite Lens	Standard WH-White BK-Black SL-Silver Premium ³ MA-Mocha CC-Charcoal CR-Cerulean FB-Firebrick	Standard WH-White BK-Black SL-Silver Premium ³ MA-Mocha CC-Charcoal CR-Cerulean FB-Firebrick

*Max of two accessories per fixture. See page 2 for ordering part number.

CANOPY/ HOUSING	CANOPY FINISH	SUSPENSION TYPE	SUSPENSION FINISH	DRIVER	DRIVER OPTIONS
RD-Round RTL-Round Trimless ⁴ SQ-Square	Standard WH-White BK-Black SL-Silver Premium ³ MA-Mocha CC-Charcoal CR-Cerulean FB-Firebrick	2AF-2AC+Feed Cable SS2-Solid Stem, 2ft SS3-Solid Stem, 3ft SS6-Solid Stem, 6ft HS2-Hang Straight, 2ft ⁵ HS3-Hang Straight, 3ft ⁵ HS6-Hang Straight, 6ft ⁵ POA-2 Powered Aircraft	Standard NA-None ⁷ CL-Clear WH-White BK-Black SL-Silver ⁶ Premium ³ MA-Mocha ⁶ CC-Charcoal ⁶ CR-Cerulean ⁶ FB-Firebrick ⁶	PHSD-Forward/Reverse Phase, 1% Dimming, 120V Only 010S-0-10V, 1% Dimming, 120/277V 0103-0-10V, 1% Dimming, 347V Only 010L-EldoLED, 0-10V, Linear, 0.1% Dimming, 120/277V ⁸ 010G-EldoLED, 0-10V, Log, 0.1% Dimming, 120/277V ⁸ DALI-EldoLED, DALI Protocol 2, DF-6, 0.1% Dimming, 120/277V (Standard as LOG) ^{8,11} DALI8-EldoLED, DALI Protocol 2, DF-8, 0.1% Dimming, 120/277V (Standard as LOG) ^{8,11} LUTE-Lutron Hilume Ecodigital, 1% Dimming, 120V/277V ^{1,8} DMX-EldoLED, DMX, 0.1% Dimming, 120V/277V ⁴	NA-None EMG-Emergency Driver ^{4,9} CSMB-Casambi ¹⁰ AWN-R-Athena ¹⁰

1 - LUTE driver is not available at 700 lumens.

2 - Optics T15/T20/T30 have a maximum of 2000 lumens.

3 - Premium finishes may have extended lead times. Custom RALs are available, please consult Inside Sales with specific request.

4 - All drivers remote mounted when using RTL canopy, DALI8 driver, DMX driver, or EMG driver options.

5 - HS2/HS3/HS6 Suspension are not available with RTL Canopy.

6 - These finishes are only available with SS Solid Stem or HS Hang Straight.

7 - Must select NA None when POA 2 Powered Aircraft Suspension Type is selected.

8 - Requires SQ square canopy for integral driver, otherwise remote mounted.

9 - Emergency option comes prewired from factory with driver in remote housing. 8W of continuous power provided for a minimum of 90 minutes. Must be installed within 30 feet of luminaire using 18 AWG wire. Not available with 0103, DMX, DALI8 or LUTE Driver.

10 - AVNR/CSMB only available with 010S driver and RD/SQ canopy.

11 - DALI and DALI8 driver options use logarithmic dimming curve as standard. For LINEAR dimming curve, add "LIN" after the dimming code, i.e. DALI LIN

CONTACT FACTORY FOR MORE OPTIONS.

LETO 11 ADJ

ADJUSTABLE SUSPENDED CYLINDER



Canopy

RD

Round Canopy



Integral Drivers


010S
0103
PHSD

Remote Drivers

010L
010G
DALI
DALI8
LUTE
DMX

RTL

Round Trimless Canopy



Integral Drivers

N/A

Remote Drivers

010S
0103
PHSD
010L
010G
DALI
DALI8
LUTE
DMX

SQ

Square Canopy



Integral Drivers

010S
0103
PHSD
010L
010G
DALI
LUTE

Remote Drivers

DALI8
DMX

Please see next page for Remote Driver Housing details.

Suspension

2AF

2 Aircraft + Feed Cable



SSX (2', 3', 6' max)

Solid Stem



HSX (2', 3', 6' max)

Hang Straight Solid Stem



Maximum Slope: 15°

POA

2 Powered Aircraft



Lens & Accessory Options

OPTC-ACC-CL-65MM

Clear Lens

Also available with complete fixture, use ordering code.

-CL



OPTC-ACC-DL-65MM

Diffusing Lens

Also available with complete fixture, use ordering code.

-DL



OPTC-ACC-HC-65MM

Honeycomb Lens

Also available with complete fixture, use ordering code.

-HC



OPTC-ACC-SL-65MM

Solite Lens

Also available with complete fixture, use ordering code.

-SL



Optics

RFLC-FXX-60MM

Faceted Reflector

Also available with complete fixture, use ordering code.

-F20/-F30/-F45/-F60



RFLC-TXX-60MM

TIR

Also available with complete fixture, use ordering code.

-T15/-T20/-T30



FXX	Optic
F20	20° Faceted
F30	30° Faceted
F45	45° Faceted
F60	60° Faceted

TXX	Optic
T15	15° TIR
T20	23° TIR
T30	36° TIR


Remote Driver Housing

Depending on the options selected in the order code on page 1, a Remote Driver Housing may be required. This will automatically be generated and put on your order as necessary.

REMOTE DRIVER	MODEL	OUTPUT	CCT	DRIVER	DRIVER OPTIONS
HRM-Housing, Remote	LET11A-S-Leto 11 Adjustable Suspended	Same as Fixture	Same as Fixture	Same as Fixture	Same as Fixture


Maximum mounting distance to luminaire using 18 AWG wire								
PHSD	010S	0103	010L	010G	DALI	DALI8	LUTE	DMX
16'	16'	16'	72'	72'	72'	72'	15'	149'

HRM Single with Externally Mounted Driver

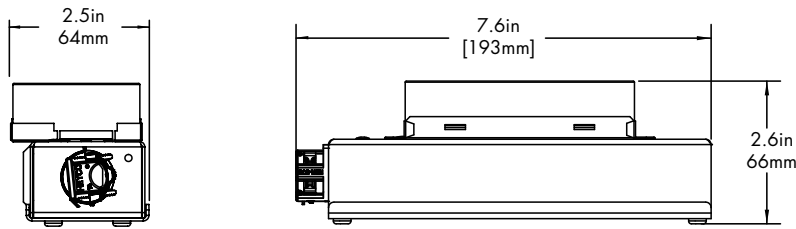


Canopy	+	Driver
RTL	+	0103
RD or RTL	+	010L
RD or RTL	+	010G
RD or RTL	+	DALI
RD or RTL	+	LUTE

HRM Single

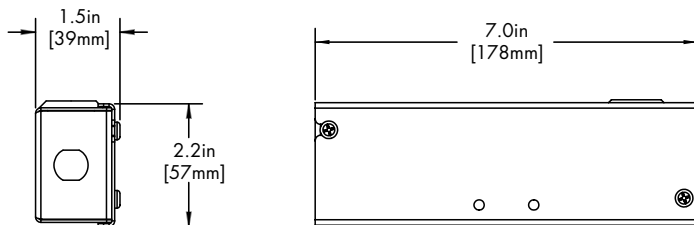

Canopy	+	Driver
RTL	+	PHSD
RTL	+	010S


HRM Double

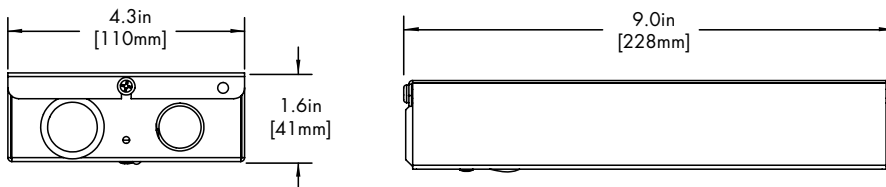

Driver
DALI8
DMX

EMG Emergency Driver

120 minute EMG operation time.

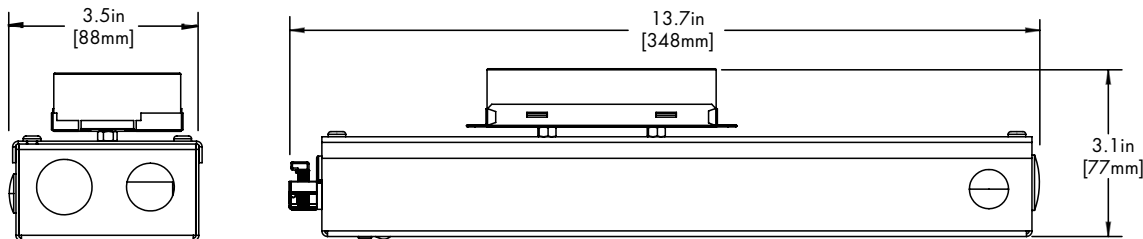

Driver
EMG

LETO 11 ADJ

ADJUSTABLE SUSPENDED CYLINDER

Standard Finish

BK
Black



WH
White



SL
Silver



Premium Finish

Two tone with Black Baffle Finish. Any combination may be used for baffle and body finishes.

MA
Mocha



CC
Charcoal



CR
Cerulean




FB
Firebrick



TM-30

2500K


COLOR VECTOR GRAPHIC

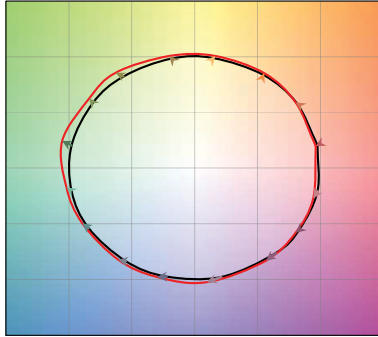

— Reference Source — Test Source

2700K


COLOR VECTOR GRAPHIC

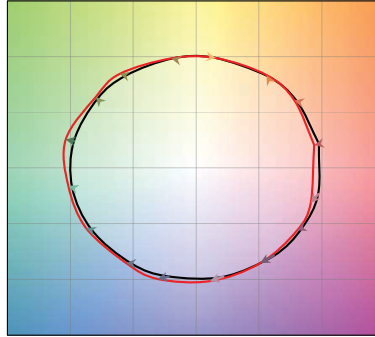

— Reference Source — Test Source

3000K


COLOR VECTOR GRAPHIC

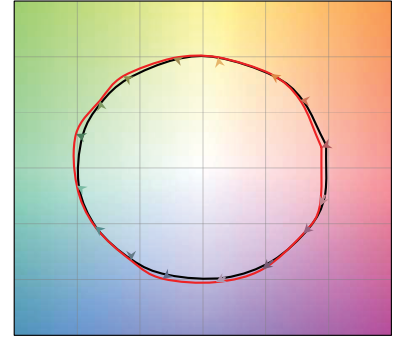

— Reference Source — Test Source

3500K


COLOR VECTOR GRAPHIC

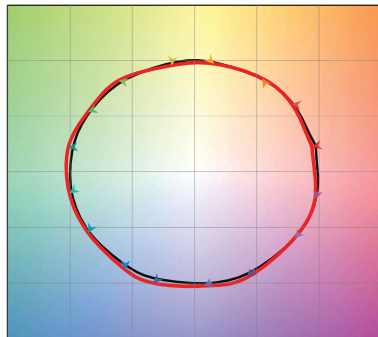

— Reference Source — Test Source

4000K


COLOR VECTOR GRAPHIC

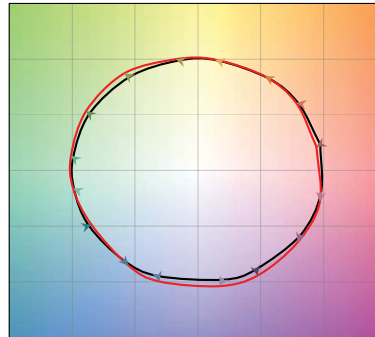

— Reference Source — Test Source

6500K



COLOR VECTOR GRAPHIC

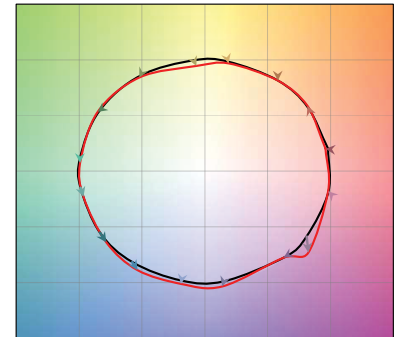



— Reference Source — Test Source

Photometry



20° Faceted Reflector

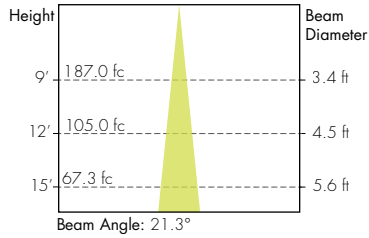



15° TIR

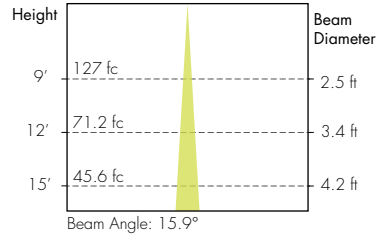



30° Faceted Reflector

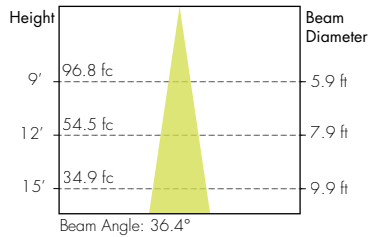



23° TIR

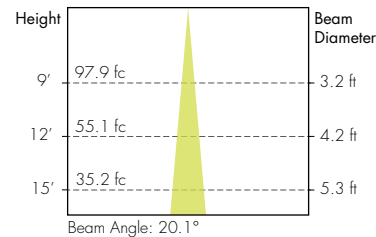

45° Faceted Reflector

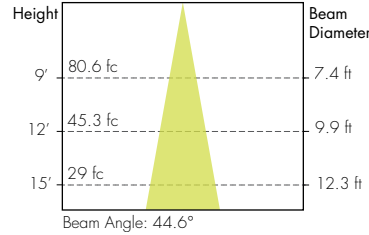

36° TIR

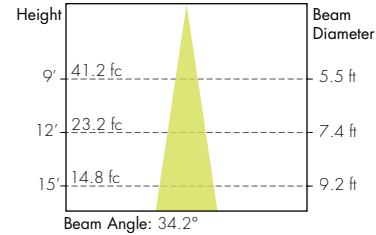

60° Faceted Reflector

