

# LETO 11 ADJ

## ADJUSTABLE SUSPENDED CYLINDER


### TUNABLE WHITE & WARM DIM

 **senso**  
by luminii

#### Features

- 360° rotation and up to 30° total tilt.
- Field interchangeable faceted metal reflectors provide adjustable beam spreads between 20° to 60°.
- Five output options available up to 3000 lumens.
- Nine driver selections available to cover a wide range of applications.
- Five year warranty.

#### Finish Options

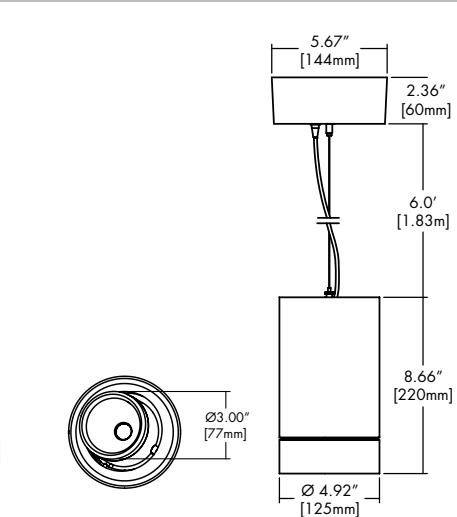

#### Technical Information

TYPE	WD1830					TW2765	
OUTPUT OPTIONS	700 lm	1000lm	1500lm	2000lm	3000lm	1500lm	3000lm
Fixture wattage	7.2 W	11.4 W	16.4 W	21.6 W	32.5 W	12.9 W	34.4 W
Delivered Lumen	724 lm	1153 lm	1632 lm	2037 lm	2851 lm	1538 lm	3185 lm
Efficacy	101 lm/W	101 lm/W	100 lm/W	94 lm/W	88 lm/W	119 lm/W	93 lm/W
Center Beam Candlepower (20° Faceted Reflector)	4536 cd	5324 cd	7537 cd	9703 cd	13162 cd	6310 cd	13068 cd

CCT	TM-30			
	CRI	R <sub>f</sub>	R <sub>g</sub>	R <sub>9</sub>
1800K	94	90	93	61
3000K	94	89	97	72
2700K	91	90	96	59
6500K	93	87	97	73

Integral Driver Example: Fixture LET11A-S-07-WD1830-F20-NA-WH-WH-RD-WH-2AF-NA-PHSD-NA  
Remote Driver Example: Fixture LET11A-S-07-WD1830-F20-NA-WH-WH-RD-WH-2AF-NA-PHSD-NA-HRM-LET11A-S-07-WD1830-PHSD-NA

#### Ordering Code

##### Fixture

MODEL	TYPE	OUTPUT	CCT	OPTIC	ACCESSORY*	BODY FINISH	BAFFLE FINISH
LET11A - Leto 11 Adjustable	S - Suspended	07-700 lumens 10-1000 lumens 15-1500 lumens 20-2000 lumens 30-3000 lumens	WD1830 - Warm Dim, 1800K-3000K TW2765 - Tunable White, 2700K-6500K <sup>10,11,12</sup>	F20- 20 Degree, Faceted F30- 30 Degree, Faceted F45- 45 Degree, Faceted F60- 60 Degree, Faceted	NA - No Accessory CL - Clear Lens DL - Diffusing Lens HC - Honeycomb Louver SL - Solite Lens	Standard WH - White BK - Black SL - Silver	Standard WH - White BK - Black SL - Silver

\*Max of two accessories per fixture. See page 2 for ordering part number.

CANOPY/ HOUSING	CANOPY FINISH	SUSPENSION TYPE	SUSPENSION FINISH	DRIVER	DRIVER OPTIONS
RD-Round RTL-Round Trimless <sup>3</sup> SQ-Square	Standard WH-White BK-Black SL-Silver	2AF-2AC+Feed Cable SS2-Solid Stem, 2ft SS3-Solid Stem, 3ft SS6-Solid Stem, 6ft HS2-Hang Straight, 2ft <sup>4</sup> HS3-Hang Straight, 3ft <sup>4</sup> HS6-Hang Straight, 6ft <sup>4</sup> POA-2 Powered Aircraft	Standard NA-None <sup>5</sup> CL-Clear WH-White BK-Black SL-Silver <sup>5</sup>	PHSD-Forward/Reverse Phase, 1% Dimming, 120V Only 0105-0-10V, 1% Dimming, 120/277V 0103-0-10V, 1% Dimming, 347V Only 010L-EldolLED, 0-10V, Linear, 0.1% Dimming, 120/277V <sup>2</sup> 010G-EldolFD, 0-10V, Log, 0.1% Dimming, 120/277V <sup>2</sup> DALI-EldolLED, DALI Protocol 2, DT-6, 0.1% Dimming, 120/277V <sup>2</sup> DALI8-EldolLED, DALI Protocol 2, DT-8, 0.1% Dimming, 120/277V <sup>2</sup> LUTE-Lutron Hilume Ecodigital, 1% Dimming, 120V/277V <sup>1,7</sup> DMX-EldolLED, DMX, 0.1% Dimming, 120V/277V <sup>3</sup>	NA-None EMG-Emergency Driver <sup>3,8</sup> CSMB-Casambi <sup>9</sup> AWNR-Athena <sup>9</sup>
Premium <sup>2</sup> MA-Mocha CC-Charcoal CR-Cerulean FB-Firebrick	MA-Mocha <sup>5</sup> CC-Charcoal <sup>5</sup> CR-Cerulean <sup>5</sup> FB-Firebrick	MA-Mocha <sup>5</sup> CC-Charcoal <sup>5</sup> CR-Cerulean <sup>5</sup> FB-Firebrick			

1 - LUTE driver is not available at 700 lumens.

2 - Premium finishes may have extended lead times. Custom RALs are available, please consult Inside Sales with specific request.

3 - All drivers remote mounted when using RTL canopy, DALI8 driver, DMX driver, or EMG driver options.

4 - HS2/HS3/HS6 Suspension are not available with RTL Canopy.

5 - These finishes are only available with SS Solid Stem or HS Hang Straight.

6 - Must select NA None when POA 2 Powered Aircraft Suspension Type is selected.

7 - Requires SQ square canopy for integral driver, otherwise remote mounted.

8 - Emergency option comes prewired from factory with driver in remote housing. 8W of continuous power provided for a minimum of 90 minutes. Must be installed within 30 feet of luminaire using 18 AWG wire. Not available with 0103, DMX, DALI8 or LUTE Driver.

9 - AWNR/CSMB only available with 0105 driver and RD/SQ canopy.

10 - TW2765 only available with 1500/3000 lumens.

11 - TW2765 only available with Drivers 010L/010G/DALI8/DMX. Not available with EMG driver option.

12 - TW2765 requires HRM - Remote Power Supply.

13 - DALI and DALI8 driver options use logarithmic dimming curve as standard. For LINEAR dimming curve, add "LIN" after the dimming code, i.e. DALIIN.

CONTACT FACTORY FOR MORE OPTIONS.

# LETO 11 ADJ

## ADJUSTABLE SUSPENDED CYLINDER

### TUNABLE WHITE & WARM DIM



## Canopy

### RD

#### Round Canopy

	Integral Drivers	Remote Drivers
2.36" 60mm	010S	010L
Ø5.17" 131mm	0103	010G
	PHSD	DALI
		DALI8
		LUTE
		DMX

Please see next page for Remote Driver Housing details.

### RTL

#### Round Trimless Canopy



	Integral Drivers	Remote Drivers
N/A	010S	
	0103	
	PHSD	
	010L	
	010G	
	DALI	
	DALI8	
	LUTE	
	DMX	

### SQ

#### Square Canopy



	Integral Drivers	Remote Drivers
2.28" 58mm	010S	DALI8
5.67" 144mm	0103	DMX
	PHSD	
	010L	
	010G	
	DALI	
	LUTE	

## Suspension

### 2AF

2 Aircraft + Feed Cable



### SSX (2', 3', 6' max)

Solid Stem



### HSX (2', 3', 6' max)

Hang Straight Solid Stem



### POA

2 Powered Aircraft



Maximum Slope: 15°

## Lens & Accessory Options

### OPTC-ACC-CL-65MM

#### Clear Lens

Also available with complete fixture, use ordering code.  
-CL



### OPTC-ACC-DL-65MM

#### Diffusing Lens

Also available with complete fixture, use ordering code.  
-DL



### OPTC-ACC-HC-65MM

#### Honeycomb Lens

Also available with complete fixture, use ordering code.  
-HC



### OPTC-ACC-SL-65MM

#### Solite Lens

Also available with complete fixture, use ordering code.  
-SL



## Optics

### RFLC-FXX-60MM

#### Faceted Reflector

Also available with complete fixture, use ordering code.  
-F20/-F30/-F45/-F60



FXX	Optic
F20	20° Faceted
F30	30° Faceted
F45	45° Faceted
F60	60° Faceted


### Remote Driver Housing

Depending on the options selected in the order code on page 1, a Remote Driver Housing may be required. This will automatically be generated and put on your order as necessary.

REMOTE DRIVER	MODEL	OUTPUT	CCT	DRIVER	DRIVER OPTIONS
HRM·Housing, Remote LET11A-S·Leto 11 Adjustable Suspended		Same as Fixture	Same as Fixture	Same as Fixture	Same as Fixture


Maximum mounting distance to luminaire using 18 AWG wire								
PHSD	010S	0103	010L	010G	DALI	DALI8	LUTE	DMX
16'	16'	16'	72'	72'	72'	72'	15'	149'

### HRM Single with Externally Mounted Driver

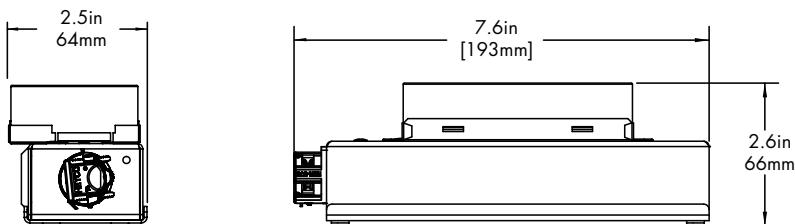


Canopy	+	Driver
RTL	+	0103
RD or RTL	+	010L
RD or RTL	+	010G
RD or RTL	+	DALI
RD or RTL	+	LUTE

### HRM Single

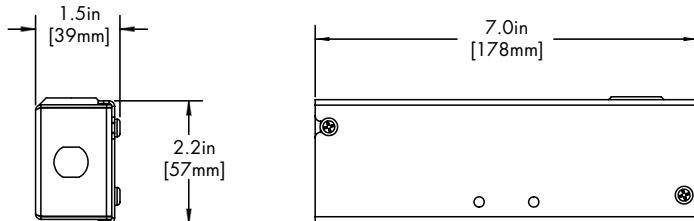

Canopy	+	Driver
RTL	+	PHSD
RTL	+	010S


### HRM Double

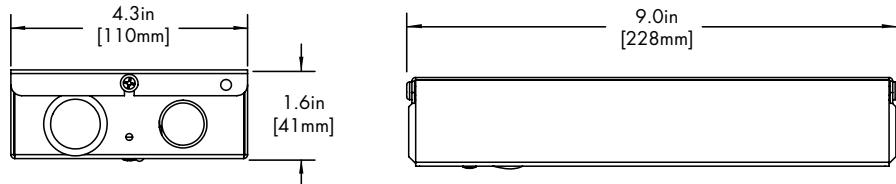

Driver
DALI8
DMX

### EMG Emergency Driver

120 minute EMG operation time.

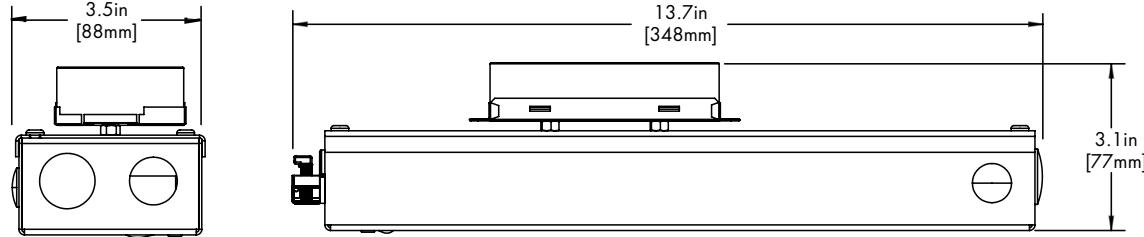

Driver
EMG

## Standard Finish

**BK**  
Black



**WH**  
White



**SL**  
Silver



## Premium Finish

Two tone with Black Baffle Finish. Any combination may be used for baffle and body finishes.

**MA**  
Mocha



**CC**  
Charcoal



**CR**  
Cerulean




**FB**  
Firebrick




**TM-30**


**Warm Dim 1800K**




**Warm Dim 3000K**



**Tunable White 2700K**





**Tunable White 6500K**





**Photometry**



**20° Faceted Reflector**

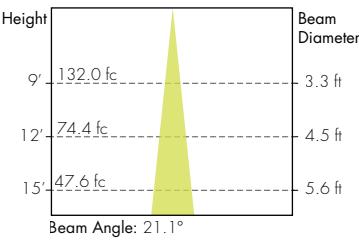

**30° Faceted Reflector**

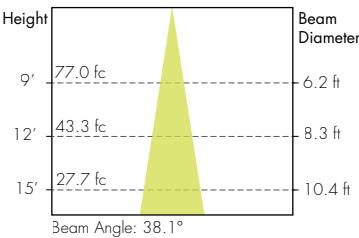

**45° Faceted Reflector**

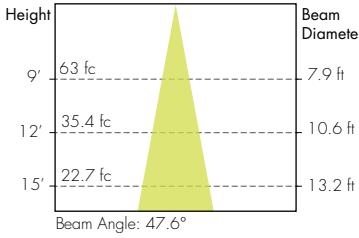

**60° Faceted Reflector**

