

LETO 11 ADJ


ADJUSTABLE WALL MOUNT CYLINDER

TUNABLE WHITE & WARM DIM



Features

- 360° rotation and up to 30° total tilt.
- Field interchangeable faceted metal reflectors provide adjustable beam spreads between 20° to 60°.
- Four output options available up to 2000 lumens.
- Nine driver selections available to cover a wide range of applications.
- Five year warranty.

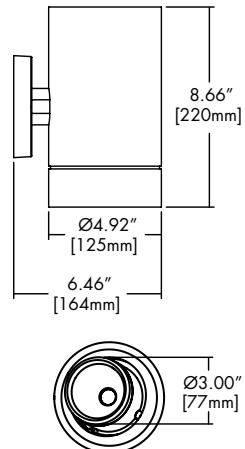

Finish Options

<input type="checkbox"/> White	<input checked="" type="checkbox"/> Mocha
<input checked="" type="checkbox"/> Black	<input type="checkbox"/> Charcoal
<input type="checkbox"/> Silver	<input type="checkbox"/> Cerulean
<input type="checkbox"/> Firebrick	<input type="checkbox"/> Cerulean



Made in Canada with Imported Parts

Technical Information

TYPE	WD1830			TW2765		
	700 lm	1000lm	1500lm	2000lm	1500lm	2000lm
Fixture wattage	7.2 W	11.4 W	16.4 W	21.6 W	12.9 W	16.4 W
Delivered Lumen	724 lm	1153 lm	1632 lm	2037 lm	1538 lm	1816 lm
Efficacy	101 lm/W	101 lm/W	100 lm/W	94 lm/W	119 lm/W	111 lm/W
Center Beam Candlepower (20° Faceted Reflector)	4536 cd	5324 cd	7537 cd	9703 cd	6310 cd	7451 cd

TM-30				
CCT	CRI	R _f	R _g	R ₉
1800K	94	90	93	61
3000K	94	89	97	72
2700K	91	90	96	59
6500K	93	87	97	73

Integral Driver Example: Fixture LET11A-WM-07-WD1830-F20-NA-WH-WH-PHSD-NA

Remote Driver Example: Fixture LET11A-WM-07-WD1830-F20-NA-WH-WH-PHSD-NA
HRM-LET11A-WM-07-WD1830-PHSD-NA

Ordering Code

Fixture

MODEL	TYPE	OUTPUT	CCT	OPTIC	ACCESSORY*	BODY FINISH	BAFFLE FINISH
LET11A-Leto 11 Adjustable	WM-Wall Mount	07- 700 lumens ¹ 10- 1000 lumens 15- 1500 lumens 20- 2000 lumens	WD1830-Warm Dim, 1800K-3000K TW2765-Tunable White, 2700K-6500K ^{5,6,7}	F20- 20 Degree, Faceted F30- 30 Degree, Faceted F45- 45 Degree, Faceted F60- 60 Degree, Faceted	NA - No Accessory CL - Clear Lens DL - Diffusing Lens HC - Honeycomb Louver	Standard WH - White BK - Black SL - Silver	Standard WH - White BK - Black SL - Silver

LET11A-Leto 11 Adjustable WM-Wall Mount 07- 700 lumens¹
10- 1000 lumens
15- 1500 lumens
20- 2000 lumens

NA - No Accessory
CL - Clear Lens
DL - Diffusing Lens
HC - Honeycomb Louver

Standard
WH - White
BK - Black
SL - Silver
Premium²
MA - Mocha
CC - Charcoal
CR - Cerulean
FB - Firebrick
Standard
WH - White
BK - Black
SL - Silver
Premium²
MA - Mocha
CC - Charcoal
CR - Cerulean
FB - Firebrick

DRIVER

DRIVER OPTIONS

PHSD - Forward/Reverse Phase, 1% Dimming, 120V Only	NA - None
010S - 0-10V, 1% Dimming, 120/277V	EMG - Emergency Driver ^{3,4}
0103 - 0-10V, 1% Dimming, 347V Only ³	
010L - EldolLED, 0-10V, Linear, 0.1% Dimming, 120/277V ³	
010G - EldolLED, 0-10V, Log, 0.1% Dimming, 120/277V ³	
DALI - EldolLED, DALI Protocol 2, DT-6, 0.1% Dimming, 120/277V (Standard as LOG) ^{3,8}	
DALI8 - EldolLED, DALI Protocol 2, DT-8, 0.1% Dimming, 120/277V (Standard as LOG) ^{3,8}	
LUTE - Lutron Hilume Ecodigital, 1% Dimming, 120V/277V ^{1,3}	
DMX - EldolLED, DMX, 0.1% Dimming, 120V/277V ³	

NA - None
EMG - Emergency Driver^{3,4}

- 1 - LUTE driver is not available at 700 lumens.
- 2 - Premium finishes may have extended lead times. Custom RALs are available, please consult Inside Sales with specific request.
- 3 - Drivers 0103/010L/010G/DALI/DALI8/DMX/LUTE/EMG are only available with HRM - Remote Power Supply.
- 4 - Emergency option comes prewired from factory with driver in remote housing. 8W of continuous power provided for a minimum of 90 minutes. Must be installed within 30 feet of luminaire using 18 AWG wire. Not available with 0103, DMX, DALI8 or LUTE Driver.
- 5 - TW2765 only available with 1500/2000 lumens.
- 6 - TW2765 only available with Drivers 010L/010G/DALI8/DMX. Not available with EMG driver option.
- 7 - TW2765 requires HRM - Remote Power Supply.
- 8 - DALI and DALI8 driver options use logarithmic dimming curve as standard. For LINEAR dimming curve, add "LIN" after the dimming code, i.e. DALI LIN

CONTACT FACTORY FOR MORE OPTIONS.

Lens & Accessory Options

OPTC-ACC-CL-65MM

Clear Lens

Also available with complete fixture, use ordering code.
-CL



OPTC-ACC-DL-65MM

Diffusing Lens

Also available with complete fixture, use ordering code.
-DL



OPTC-ACC-HC-65MM

Honeycomb Louver

Also available with complete fixture, use ordering code.
-HC



Optics

RFLC-FXX-60MM

Faceted Reflector

Also available with complete fixture, use ordering code.
-F20/-F30/-F45/-F60



FXX	Optic
F20	20° Faceted
F30	30° Faceted
F45	45° Faceted
F60	60° Faceted

Remote Driver Housing


Depending on the options selected in the order code on page 1, a Remote Driver Housing may be required. This will automatically be generated and put on your order as necessary.

REMOTE DRIVER	MODEL	OUTPUT	CCT	DRIVER	DRIVER OPTIONS
HRM-Housing, Remote	LET11A-WM	Same as Fixture	Same as Fixture	Same as Fixture	Same as Fixture

Maximum mounting distance to luminaire using 18 AWG wire								
PHSD	010S	0103	010L	010G	DALI	DALI8	LUTE	DMX
16'	16'	16'	72'	72'	72'	72'	15'	149'


4" J-box

Minimum volume required to mount drivers in junction box: 70mm x 40mm x 30mm.

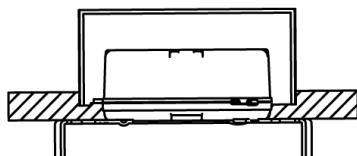


Driver
PHSD
010S

HRM Single with Externally Mounted Driver

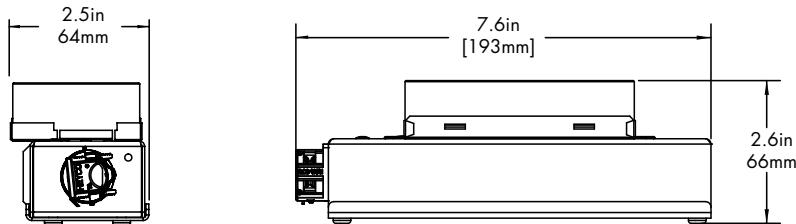

Driver
0103
010L
010G
DALI
LUTE


HRM Double

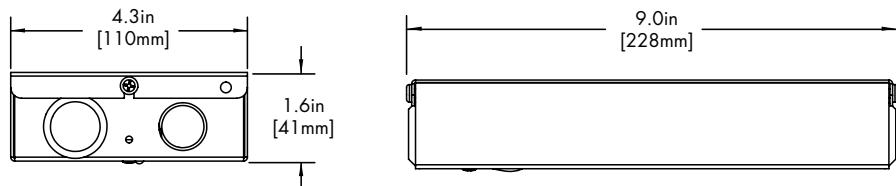

Driver
DALI8
DMX

EMG Emergency Driver

120 minute EMG operation time.

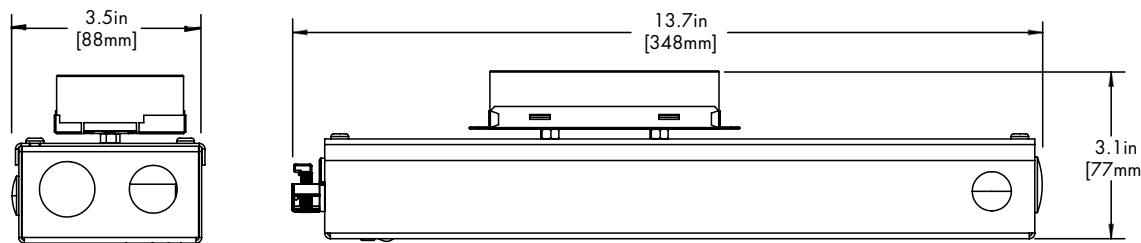

Driver
EMG

Standard Finish

BK
Black



WH
White



SL
Silver



Premium Finish

Two tone with Black Baffle Finish. Any combination may be used for baffle and body finishes.

MA
Mocha



CC
Charcoal



CR
Cerulean




FB
Firebrick




TM-30


Warm Dim 1800K




Warm Dim 3000K



Tunable White 2700K




Tunable White 6500K




Photometry


20° Faceted Reflector

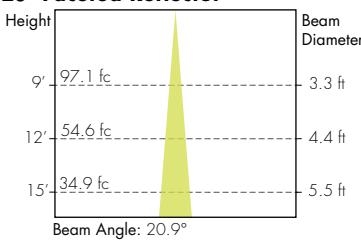


CBCP




30° Faceted Reflector

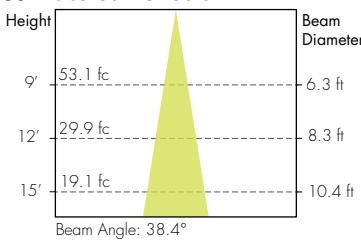


CBCP




45° Faceted Reflector

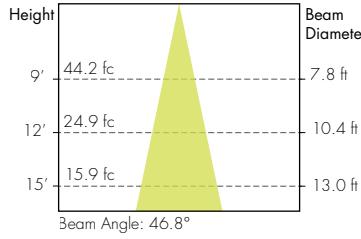

CBCP



60° Faceted Reflector

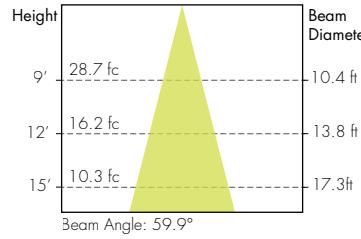

CBCP

