

LETO 11 MINI

MONO POINT CYLINDER

TUNABLE WHITE & WARM DIM

senso
by luminii




Features

- Faceted metal reflectors provide beam spreads between 20° to 60°.
- Output available up to 1000 lumens.
- Nine drivers selections available to cover wide range of applications.
- Five year warranty.

Finish Options

<input type="checkbox"/> White	<input type="checkbox"/> Silver	<input type="checkbox"/> Mocha
<input type="checkbox"/> Black	<input type="checkbox"/> Charcoal	<input type="checkbox"/> Cerulean
<input type="checkbox"/> Firebrick	<input type="checkbox"/> Warm Nickel	
<input type="checkbox"/> Bronze	<input type="checkbox"/> Aged Brass	

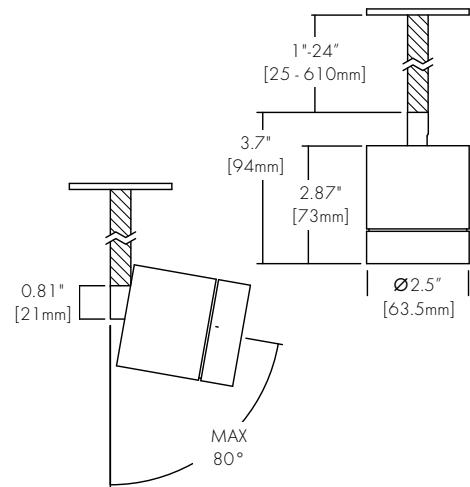

Technical Information

TYPE	WD1830
OUTPUT OPTIONS	700 lm (S)
Fixture wattage	7.2 W
Delivered Lumen	819 lm
Efficacy	114 lm/W
Center Beam Candlepower (20° Faceted Reflector)	1517 cd

CCT	TM-30			
	CRI	R _f	R _g	R ₉
1800K	94	90	93	61
3000K	94	89	97	72
2700K	91	90	96	59
6500K	93	87	97	73

Integral Driver Example: Fixture LET11M-MP-S-07-WD1830-F20-NA-WH-WH-RDS-WH-SS01-WH-PHSD-NA

Remote Driver Example: Fixture LET11M-MP-S-07-WD1830-F20-NA-WH-WH-RDS-WH-SS01-WH-PHSD-NA-HRM-LET11M-MP-07-WD1830-PHSD-NA

Ordering Code

Fixture

MODEL	TYPE	SIZE	OUTPUT	CCT	OPTIC	ACCESSORY	BODY FINISH	BAFFLE FINISH
LET11M-Leto 11 Mini	MP-Mono Point	S-Small	07-700 lumens [7.2W] ²	WD1830-Warm Dim, 1800K-3000K	F20-20 Degree, Faceted F30-30 Degree, Faceted F60-60 Degree, Faceted	NA-No Accessory DL-Diffusing Lens	Standard WH-White BK-Black S-Silver	Standard WH-White BK-Black S-Silver

LET11M-Leto 11 Mini	MP-Mono Point	S-Small	07-700 lumens [7.2W] ²	WD1830-Warm Dim, 1800K-3000K	F20-20 Degree, Faceted F30-30 Degree, Faceted F60-60 Degree, Faceted	NA-No Accessory DL-Diffusing Lens	Standard WH-White BK-Black S-Silver	Standard WH-White BK-Black S-Silver
							Premium ¹ MA-Mocha CC-Charcoal CR-Cerulean FB-Firebrick BZ-Bronze WN-Warm Nickel AB-Aged Brass	Premium ¹ MA-Mocha CC-Charcoal CR-Cerulean FB-Firebrick BZ-Bronze WN-Warm Nickel AB-Aged Brass

CANOPY/ HOUSING	CANOPY FINISH	SUSPENSION TYPE	SUSPENSION FINISH	DRIVER	DRIVER OPTIONS ⁵
RDS-Round Slim SQS-Square Slim RTL-Round Flangeless RDR-Round Semi-Recessed	Standard WH-White BK-Black S-Silver Premium ¹ MA-Mocha CC-Charcoal CR-Cerulean FB-Firebrick BZ-Bronze WN-Warm Nickel AB-Aged Brass	SS01-Solid Stem, 1" SS06-Solid Stem, 6" SS1-Solid Stem, 12" SS2-Solid Stem, 24"	Standard WH-White BK-Black S-Silver Premium ¹ MA-Mocha CC-Charcoal CR-Cerulean FB-Firebrick BZ-Bronze WN-Warm Nickel AB-Aged Brass	PHSD-Forward/Reverse Phase, 1% Dimming, 120V Only 0103-0-10V, 1% Dimming, 120/277V 0103-0-10V, 1% Dimming, 347V Only ³ 010L-EldoLED, 0-10V, Linear, 0.1% Dimming, 120/277V ³ 010G-EldoLED, 0-10V, Log, 0.1% Dimming, 120/277V ³ DALI-EldoLED, DALI Protocol 2, DT-6, 0.1% Dimming, 120/277V (Standard as LOG) ^{3,6} DALI8-EldoLED, DALI Protocol 2, DT-8, 0.1% Dimming, 120/277V (Standard as LOG) ^{3,6} LUTE-Lutron Hilume Ecodigital, 1% Dimming, 120V/277V ^{2,3} DMX-EldoLED, DMX, 0.1% Dimming, 120V/277V ³	NA-None EMG-Emergency Driver ^{3,4}

1 - Premium finishes may have extended lead times. Custom RALs are available, please consult Inside Sales with specific request.

2 - LUTE driver is not available at 700 lumens.

3 - Drivers 0103/010L/010G/DALI/DALI8/DMX/LUTE/EMG are only available with HRM - Remote Power Supply.

4 - Emergency option comes prewired from factory with driver in remote housing. 8W of continuous power provided for a minimum of 90 minutes. Must be installed within 30 feet of luminaire using 18 AWG wire. Not available with 0103, DMX, DALI8 or LUTE Driver.


5 - AWNR/CSMB available upon request.

6 - DALI and DALI8 driver options use logarithmic dimming curve as standard. For LINEAR dimming curve, add "LIN" after the dimming code, i.e. DALI1LIN

Canopy


RDS

Round Slim Canopy




SQS

Square Slim Canopy




RTL

Round Flangless Canopy



RDR

Semi-Recessed

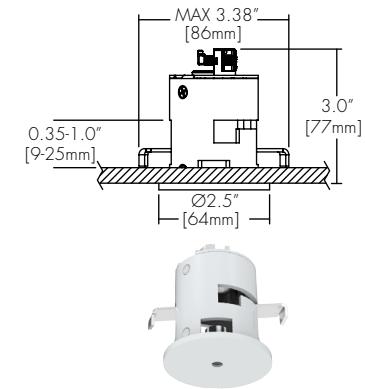

RDS or SQS

Integral Drivers	PHSD, 010S
Remote Drivers	0103, 010L, 010G, DALI, DALI8, LUTE, DMX

RTL or RDR

Integral Drivers	
Remote Drivers	PHSD, 010S, 0103, 010L, 010G, DALI, DALI8, LUTE, DMX

Suspension

SSX (1", 6", 12", 24")
Solid Stem



Lens & Accessory Options

DL

Diffusing Lens



Optics

FFX (20°, 30°, 60°)
Faceted Reflector



Remote Driver Housing

Depending on the options selected in the order code on page 1, a Remote Driver Housing may be required. This will automatically be generated and put on your order as necessary.


REMOTE DRIVER	MODEL	OUTPUT	CCT	DRIVER	DRIVER OPTIONS
HRM-Housing, Remote	LET11M-MP-Leto 11 Mini	Same as Fixture	Same as Fixture	Same as Fixture	Same as Fixture

Mono Point

Maximum mounting distance to luminaire using 18 AWG wire							
010S	0103	PHSD	010L	010G	DALI	DMX	LUTE
16'	16'	16'	72'	72'	72'	149'	15'


4" Jbox

Minimum volume required to mount drivers in junction box: 70mm x 40mm x 30mm.

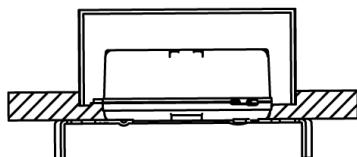


Canopy	+	Driver
RDS	+	PHSD
RDS	+	010S
SQS	+	PHSD
SQS	+	010S

HRM Single with Externally Mounted Driver

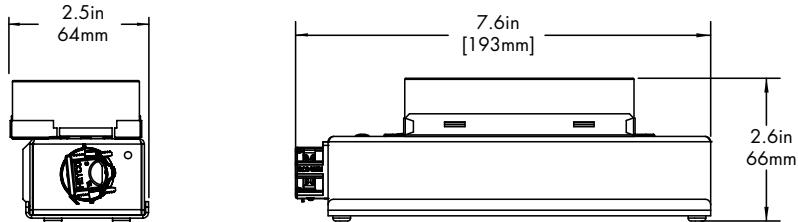


Driver
0103
010L
010G
010S
DALI
LUTE

HRM Double

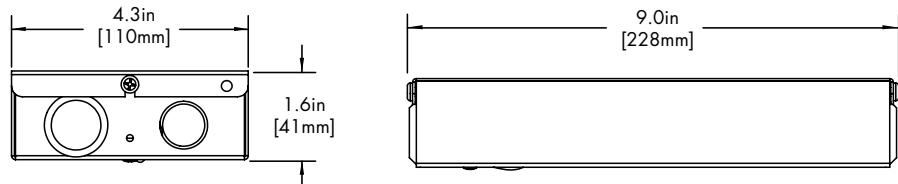

Driver
DALI8
DMX


HRM Cylinder Driver

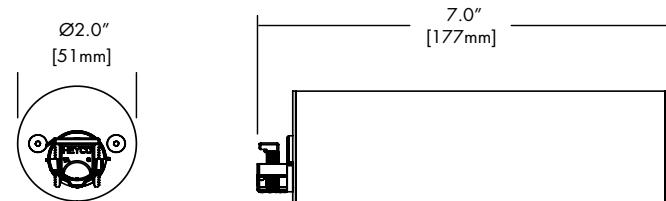

Canopy	+	Driver
RDR	+	010S
RDR	+	PHSD

EMG Emergency Driver

120 minute EMG operation time.

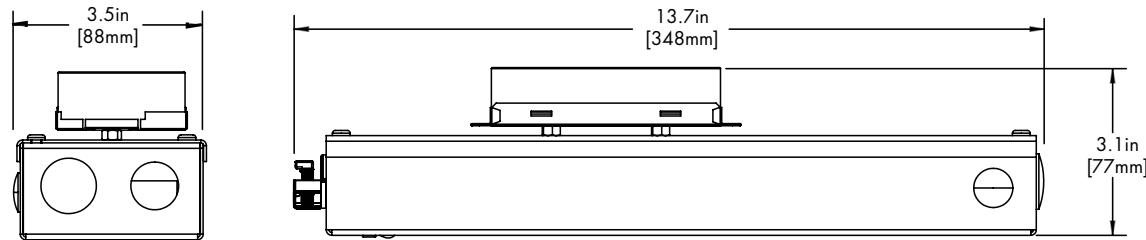

Driver
EMG

Standard Finishes

BK
Black



WH
White



SL
Silver



Premium Finishes

MA
Mocha



CC
Charcoal



CR
Cerulean



FB
Firebrick



BZ
Bronze



WN
Warm Nickle




AB
Antique Bronze




TM-30


Warm Dim 1800K




Warm Dim 3000K



Tunable White 2700K




Tunable White 6500K




Photometry


20° Faceted Reflector

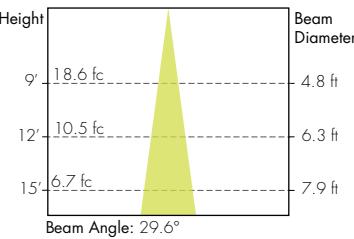


CBCP




30° Faceted Reflector

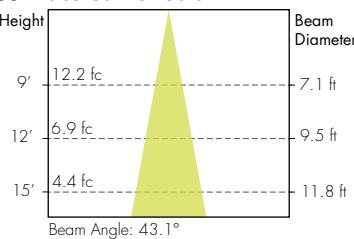

CBCP



60° Faceted Reflector

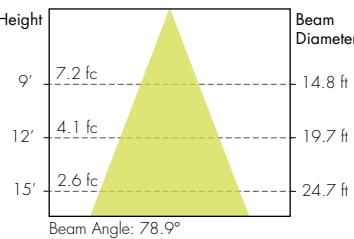

CBCP

