


### Features

- Faceted metal reflectors provide beam spreads between 20° to 60°.
- Two output options available up to 1000 lumens.
- Nine drivers selections available to cover wide range of applications.
- Five year warranty.

### Finish Options

White	Silver	Mocha
Black	Charcoal	Cerulean
Firebrick	Warm Nickel	
Bronze	Aged Brass	

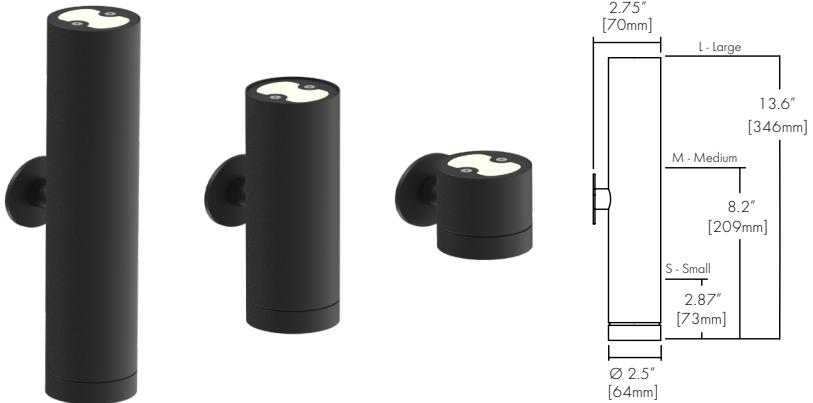

### Technical Information

OUTPUT OPTIONS		0502	1005
Fixture wattage		3.2 W	9.1 W
Delivered Lumen		482 lm	1002 lm
Efficacy		151 lm/W	110 lm/W
Center Beam Candlepower (20° Faceted Reflector)		1489 cd	3096 cd
Fixture wattage		3.2 W	9.1 W
Delivered Lumen		241 lm	568 lm
Efficacy		75 lm/W	62 lm/W

CCT	Multiplier	TM-30			
		CRI	R <sub>f</sub>	R <sub>g</sub>	R <sub>g</sub>
2500K	0.80	93+	93	102	50+
2700K	0.92	93+	92	100	50+
3000K	0.97	93+	92	103	50+
3500K	1.00	93+	93	102	50+
4000K	1.07	93+	92	101	50+
6500K	1.05	93+	92	101	50+

### Ordering Code

Integral Driver Example: Fixture LET11M-WM-S-0505-25K-F20-NA-WH-WH-RDS-WH-PHSD-NA

Remote Driver Example: Fixture LET11M-WM-S-0505-25K-F20-NA-WH-WH-RDS-WH-PHSD-NA-HRM-LET11M-WM-0505-25K-PHSD-NA

#### Fixture

MODEL	TYPE	SIZE	OUTPUT	CCT	OPTIC	ACCESSORY	BODY FINISH	BAFFLE FINISH
LET11M-Leto 11 Mini	WM-Wall Mount	S-Small	0502-500/250 lumens <sup>1</sup>	25K-2500K 27K-2700K 30K-3000K 35K-3500K 40K-4000K 65K-6500K	F20-20 Degree, Faceted F30-30 Degree, Faceted F60-60 Degree, Faceted	NA-No Accessory DL-Diffusing Lens HC-Honeycomb Louver <sup>2</sup>	Standard WH-White BK-Black S-Silver	Standard WH-White BK-Black S-Silver
		M-Medium L-Large	0502-500/250 lumens 1005-1000/500 lumens				Premium <sup>3</sup> MA-Mocha CC-Charcoal CR-Cerulean FB-Firebrick BZ-Bronze WN-Warm Nickel AB-Aged Brass	Premium <sup>3</sup> MA-Mocha CC-Charcoal CR-Cerulean FB-Firebrick BZ-Bronze WN-Warm Nickel AB-Aged Brass

CANOPY/ HOUSING	CANOPY FINISH	DRIVER	DRIVER OPTIONS <sup>6</sup>
-----------------	---------------	--------	-----------------------------

RDS-Round Slim SQS-Square Slim RDR-Round Semi-Recessed	Standard WH-White BK-Black S-Silver	PHSD-Forward/Reverse Phase, 1% Dimming, 120V Only 010S-0-10V, 1% Dimming, 120/277V 0103-0-10V, 1% Dimming, 347V Only <sup>4</sup> 010L-EldolED, 0-10V, Linear, 0.1% Dimming, 120/277V <sup>4</sup> 010G-EldolED, 0-10V, Log, 0.1% Dimming, 120/277V <sup>4</sup> DALI-EldolED, DALI Protocol 2, DT-6, 0.1% Dimming, 120/277V (Standard as LOG) <sup>4,7</sup> DALI8-EldolED, DALI Protocol 2, DT-8, 0.1% Dimming, 120/277V (Standard as LOG) <sup>4,7</sup> LUTE-Lutron Hilume Ecodigital, 1% Dimming, 120V/277V <sup>4</sup> DMX-EldolED, DMX, 0.1% Dimming, 120V/277V <sup>4</sup>	NA-None EMG-Emergency Driver <sup>4,5</sup>
Standard WH-White BK-Black S-Silver	MA-Mocha CC-Charcoal CR-Cerulean FB-Firebrick BZ-Bronze WN-Warm Nickel AB-Aged Brass		

1 - Size Small is limited to 500 lumens direct and 250 lumens indirect.

2 - Size Small is not available with accessory HC Honeycomb.

3 - Premium finishes may have extended lead times. Custom RALs are available, please consult Inside Sales with specific request.

4 - Drivers 0103/010L/010G/DALI/DALI8/DMX/LUTE/EMG are only available with HRM- Remote Power Supply.

5 - Emergency option comes prewired from factory with driver in remote housing. 8W of continuous power provided for a minimum of 90 minutes. Must be installed within 30 feet of luminaire using 18 AWG wire. Not available with 0103, DMX, DALI8 or LUTE Driver.

6 - AVNR/CSMB available upon request.


7 - DALI and DALI8 driver options use logarithmic dimming curve as standard. For LINEAR dimming curve, add "LIN" after the dimming code, i.e. DALILIN

CONTACT FACTORY FOR MORE OPTIONS.

### Canopy


#### RDS

Round Slim Canopy

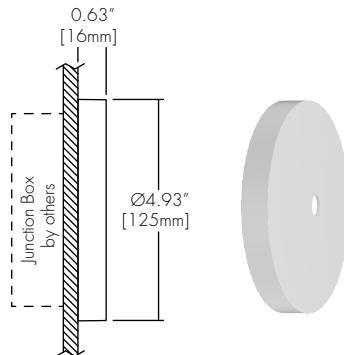


#### SQS

Square Slim Canopy

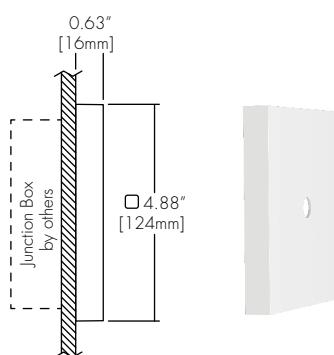

#### RDR

Semi-Recessed

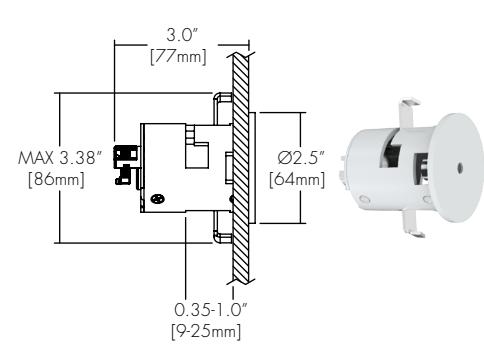

#### RDS or SQS

Integral Drivers	PHSD, 010S
Remote Drivers	0103, 010L, 010G, DALI, DALI8, LUTE, DMX

#### RDR

Integral Drivers	
Remote Drivers	PHSD, 010S, 0103, 010L, 010G, DALI, DALI8, LUTE, DMX

### Lens & Accessory Options

#### DL

Diffusing Lens



#### HC

Honeycomb



### Optics

#### FXX (20°, 30°, 60°)

Faceted Reflector



### Remote Driver Housing


Depending on the options selected in the order code on page 1, a Remote Driver Housing may be required. This will automatically be generated and put on your order as necessary.

REMOTE DRIVER	MODEL	OUTPUT	CCT	DRIVER	DRIVER OPTIONS
HRM-Housing, Remote	LET11M-WM-Leto 11 Mini Wall Mount	Same as Fixture	Same as Fixture	Same as Fixture	Same as Fixture

Maximum mounting distance to luminaire using 18 AWG wire							
010S	0103	PHSD	010L	010G	DALI	DMX	LUTE
16'	16'	16'	72'	72'	72'	149'	15'


### 4" Jbox

Minimum volume required to mount drivers in junction box: 70mm x 40mm x 30mm.

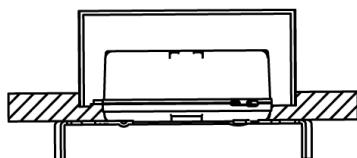


Canopy	+	Driver
RDS	+	PHSD
RDS	+	010S
SQS	+	PHSD
SQS	+	010S

### HRM Single with Externally Mounted Driver

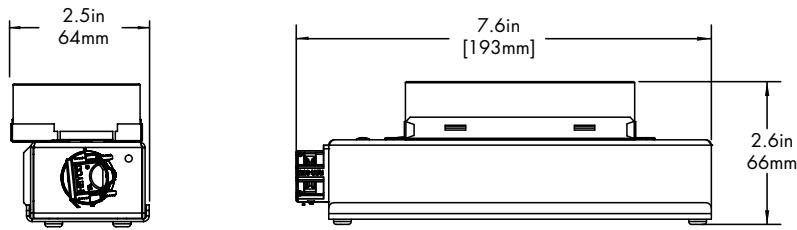

Driver
0103
010L
010G
010S
DALI
LUTE


### HRM Double

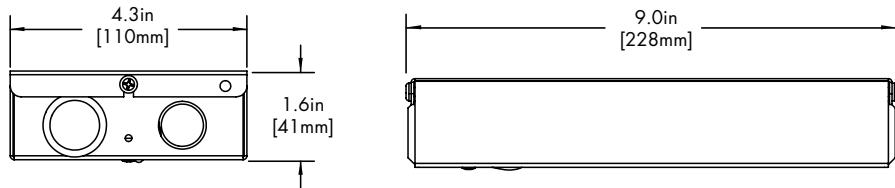

Driver
DALI8
DMX

### EMG Emergency Driver

120 minute EMG operation time.

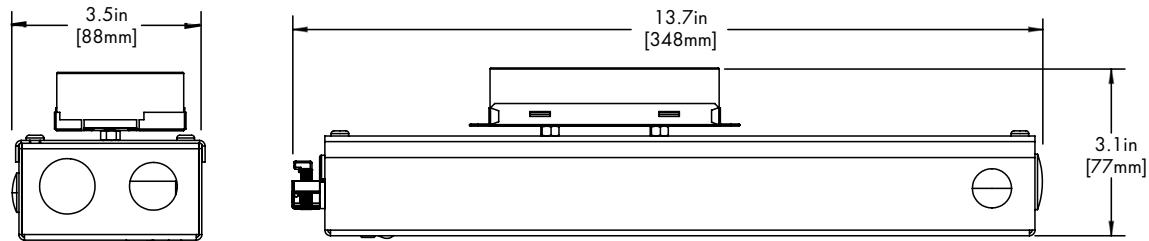

Driver
EMG

## Standard Finishes

**BK**  
Black



**WH**  
White



**SL**  
Silver



## Premium Finishes

**MA**  
Mocha



**CC**  
Charcoal



**CR**  
Cerulean



**FB**  
Firebrick



**BZ**  
Bronze



**WN**  
Warm Nickle




**AB**  
Antique Bronze




## TM-30


2500K

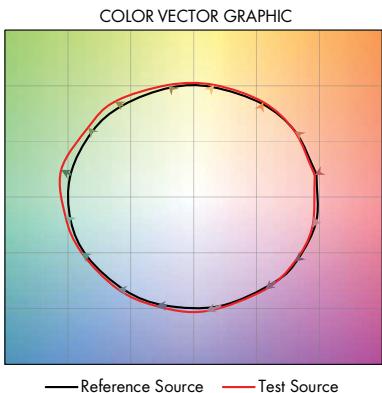


2700K

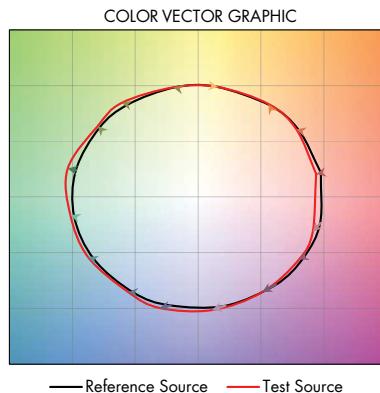


3000K

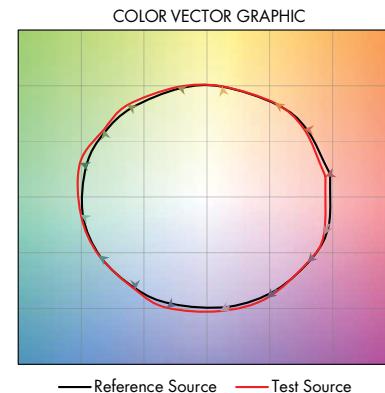


3500K

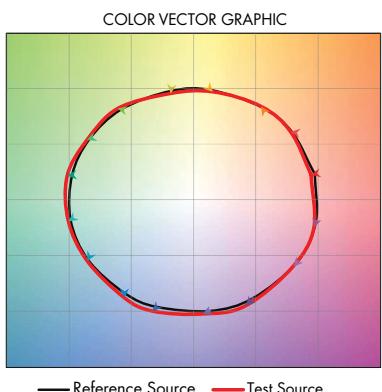

4000K


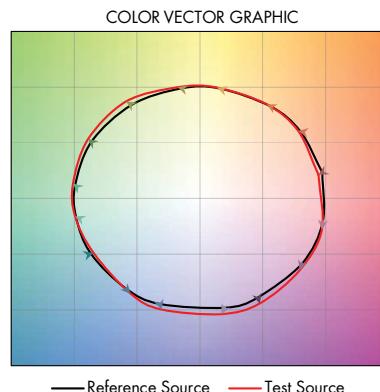


6500K


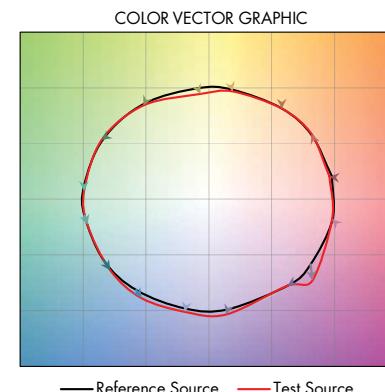


### Photometry

#### 20° Faceted Reflector

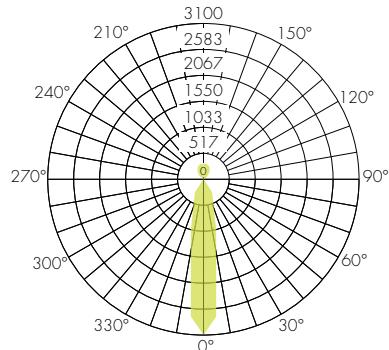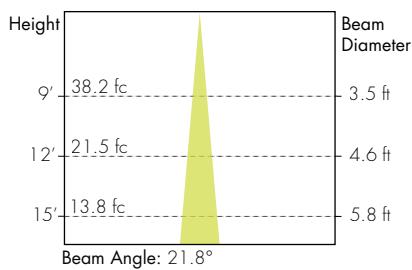

#### 30° Faceted Reflector

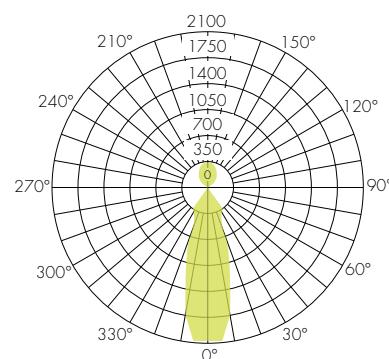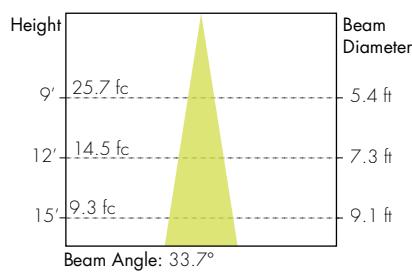

#### 60° Faceted Reflector

