LETO 11 MINI WET

SUSPENDED CYLINDER

senso by luminii

Features

- Faceted metal reflectors provide beam spreads between 20° to 60°.
- Stem Suspended, up to 1800 lumens.
- Nine drivers selections available to cover wide range of applications.
- IP65
- Five year warranty.


WET · TITLE 24 JA8 COMPLIANT · RoHS · c UL us LISTED · Declare.

Finish Options

White · Silver · Mocha · Firebrick · Warm Nickle
Black · Charcoal · Cerulean · Bronze · Aged Brass



Made in Canada with Imported Parts

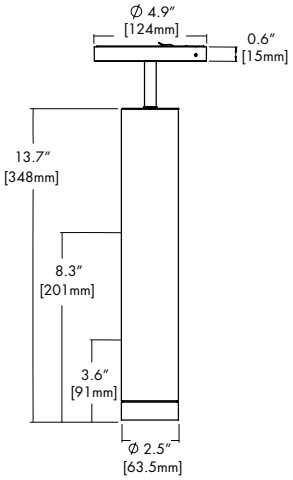

Technical Information

OUTPUT OPTIONS	700 lm	1000 lm	1500 lm	1800 lm
Size	S/M/L	M/L	M/L	L
Fixture wattage	6.5 W	9.8 W	14.8 W	19 W
Delivered Lumen	693 lm	1030 lm	1450 lm	1850 lm
Efficacy	107 lm/W	105 lm/W	98 lm/W	97 lm/W
Center Beam Candlepower (20° Faceted Reflector)	1985 cd	2951 cd	4128 cd	5674 cd

CCT	Multiplier	TM-30 CRI	R_f	R_g	R_9
2500K	0.80	93+	93	102	50+
2700K	0.92	93+	92	100	50+
3000K	0.97	93+	92	103	50+
3500K	1.00	93+	93	102	50+
4000K	1.07	93+	92	101	50+
6500K	1.05	93+	92	101	50+

Integral Driver Example: Fixture LET11MW-S-S-07-25K-F20-NA-WH-WH-RDS-WH-RDS-WH-SS2-WH-PHSD-NA
Remote Driver Example: Fixture LET11MW-S-S-07-25K-F20-NA-WH-WH-RDS-WH-RDS-WH-SS2-WH-PHSD-NA
HRM-LET11MW-S-07-25K-PHSD-NA

Ordering Code

Fixture

MODEL
LET11MW - Leto 11 Mini Wet Rated

TYPE
S - Suspended

SIZE / OUTPUT
S - Small: 07 - 700 lumens (6.5W)
M - Medium: 07 - 700 lumens (6.5W); 10 - 1000 lumens (9.8W); 15 - 1500 lumens (14.8W)
L - Large: 07 - 700 lumens (6.5W); 10 - 1000 lumens (9.8W); 15 - 1500 lumens (14.8W); 18 - 1800 lumens (19.0W)

CCT
25K - 2500K
27K - 2700K
30K - 3000K
35K - 3500K
40K - 4000K
65K - 6500K

OPTIC
F20 - 20 Degree, Faceted
F30 - 30 Degree, Faceted
F60 - 60 Degree, Faceted

ACCESSORY
NA - No Accessory[7]
DF - Diffusing Film
HC - Honeycomb Louver
AF - Asymmetric Film

BODY FINISH
Standard
WH - White
BK - Black
SL - Silver
Premium[1]
MA - Mocha
CC - Charcoal
CR - Cerulean
FB - Firebrick
BZ - Bronze
WN - Warm Nickel
AB - Aged Brass

BAFFLE FINISH
Standard
WH - White
BK - Black
SL - Silver
Premium[1]
MA - Mocha
CC - Charcoal
CR - Cerulean
FB - Firebrick
BZ - Bronze
WN - Warm Nickel
AB - Aged Brass

CANOPY/ HOUSING
RDS - Round Slim

CANOPY FINISH
Standard
WH - White
BK - Black
SL - Silver
Premium[1]
MA - Mocha
CC - Charcoal
CR - Cerulean
FB - Firebrick
BZ - Bronze
WN - Warm Nickel
AB - Aged Brass

SUSPENSION TYPE
SS2 - Solid Stem, 2ft
SS3 - Solid Stem, 3ft
SS6 - Solid Stem, 6ft

SUSPENISION FINISH
Standard
WH - White
BK - Black
SL - Silver
Premium[1]
MA - Mocha
CC - Charcoal
CR - Cerulean
FB - Firebrick
BZ - Bronze
WN - Warm Nickel
AB - Aged Brass

DRIVER
PHSD - Forward/Reverse Phase, 1% Dimming, 120V Only
010S - 0-10V, 1% Dimming, 120/277V
0103 - 0-10V, 1% Dimming, 347V Only[4]
010L - EldoLED, 0-10V, Linear, 0.1% Dimming, 120/277V[4]
010G - EldoLED, 0-10V, Log, 0.1% Dimming, 120/277V[4]
DALI - EldoLED, DALI Protocol 2, DT-6, 0.1% Dimming, 120/277V (Standard as LOG)[2,4]
DALI8 - EldoLED, DALI Protocol 2, DT-8, 0.1% Dimming, 120/277V (Standard as LOG)[2,4]
LUTE - Lutron Hilume Ecodigital, 1% Dimming, 120V/277V[3,4]
DMX - EldoLED, DMX, 0.1% Dimming, 120V/277V[4]

DRIVER OPTIONS[6]
NA - None
EMG - Emergency Driver[4,5]

1 - Premium finishes may have extended lead times. Custom RALs are available, please consult Inside Sales with specific request.
2 - DALI and DALI8 driver options use logarithmic dimming curve as standard. For LINEAR dimming curve, add "LIN" after the dimming code, i.e. DALILIN
3 - LUTE driver is not available at 700 lumens.
4 - Drivers 0103/010L/010G/DALI/DALI8/DMX/LUTE/EMG are only available with Remote Power Supply.
5 - Emergency option comes prewired from factory with driver in remote housing. 8W of continuous power provided for a minimum of 90 minutes. Must be installed within 30 feet of luminaire using 18 AWG wire. Not available with 0103, DMX, DALI8 or LUTE Driver.
6 - AWNR/CSMB available upon request.
7 - Fixture will come with a clear lens.

CONTACT FACTORY FOR MORE OPTIONS.


info@luminii.com | luminii.com
*LUMINII RESERVES THE RIGHTS TO CHANGE SPECIFICATION & INSTRUCTION WITHOUT NOTICE

LETO 11 MINI WET
SUSPENDED CYLINDER

senso by luminii

Canopy

RDS
Round Slim Canopy



Integral Drivers	Remote Drivers
PHSD 010S	0103 010L 010G DALI DALI8 LUTE DMX

Driver operation temprature -40C to 50C		
Control Type	**min.**	**max.**
PHSD,010S*	-10C	50C
DALI,DALI8,DMX	-20C	50C
LUTE	0C	45C
010L/010G	-20C	50C
0103	-40C	50C

*-40C to 50C ambient operation temperature when using remote option.

Suspension

SSX (2', 3', 6' max)
Solid Stem



Lens & Accessory Options

DL
Diffusing Film



HC
Honeycomb



AF
Asymmetric Film



Optics

FXX (20°, 30°, 60°)
Faceted Reflector



info@luminii.com | luminii.com
*LUMINII RESERVES THE RIGHTS TO CHANGE SPECIFICATION & INSTRUCTION WITHOUT NOTICE

Remote Driver Housing


Depending on the options selected in the order code on page 1, a Remote Driver Housing may be required. This will automatically be generated and put on your order as necessary.

REMOTE DRIVER	MODEL	OUTPUT	CCT	DRIVER	DRIVER OPTIONS
HRM - Housing, Remote	LET11MW-S - Leto 11 Mini Wet Suspended	Same as Fixture	Same as Fixture	Same as Fixture	Same as Fixture

Maximum mounting distance to luminaire using 18 AWG wire							
010S	0103	PHSD	010L	010G	DALI	DMX	LUTE
16'	16'	16'	72'	72'	72'	149'	15'


4" J-box

Minimum volume required to mount drivers in junction box: 70mm x 40mm x 30mm.

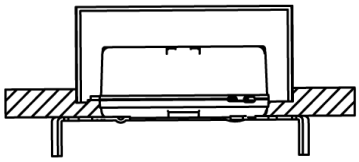


Canopy	+	Driver
RDS	+	PHSD
RDS	+	010S
SQS	+	PHSD
SQS	+	010S

HRM Single with Externally Mounted Driver

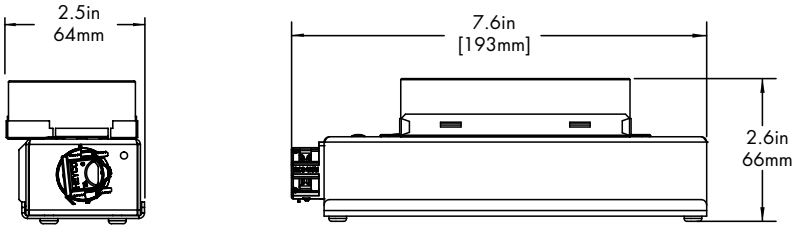

Driver
0103
010L
010G
010S
DALI
LUTE


HRM Double

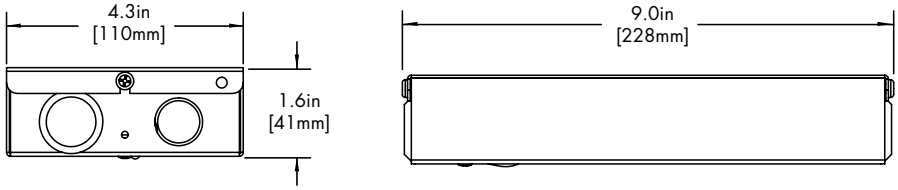

Driver
DALI8
DMX

EMG Emergency Driver

120 minute EMG operation time.

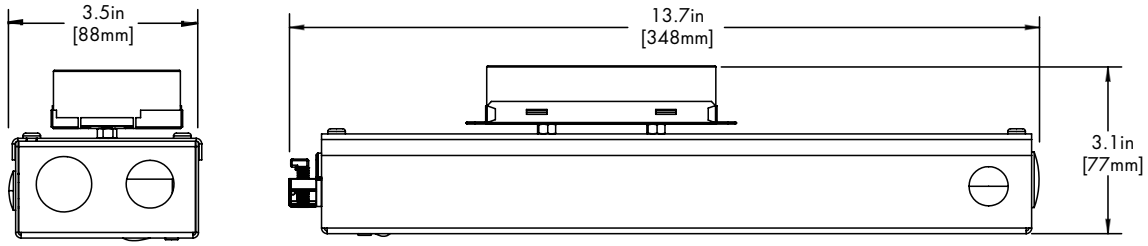

Driver
EMG

*LUMINII RESERVES THE RIGHTS TO CHANGE SPECIFICATION & INSTRUCTION WITHOUT NOTICE

LETO 11 MINI WET

SUSPENDED CYLINDER

Standard Finishes

BK
Black



WH
White



SL
Silver



Premium Finishes

MA
Mocha



CC
Charcoal



CR
Cerulean



FB
Firebrick



BZ
Bronze



WN
Warm Nickle



AB
Aged Brass




info@luminii.com | luminii.com

*LUMINII RESERVES THE RIGHTS TO CHANGE SPECIFICATION & INSTRUCTION WITHOUT NOTICE

TM-30

2500K


COLOR VECTOR GRAPHIC

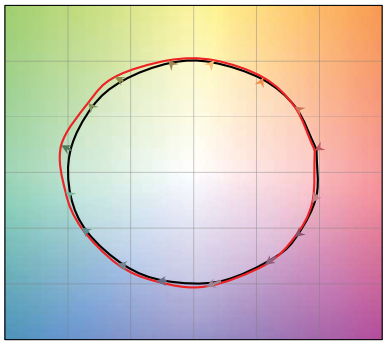

Reference Source — Test Source

2700K


COLOR VECTOR GRAPHIC

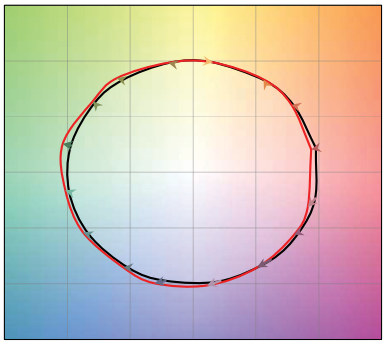

Reference Source — Test Source

3000K


COLOR VECTOR GRAPHIC

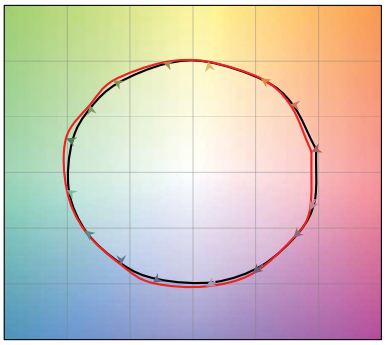

Reference Source — Test Source

3500K


COLOR VECTOR GRAPHIC

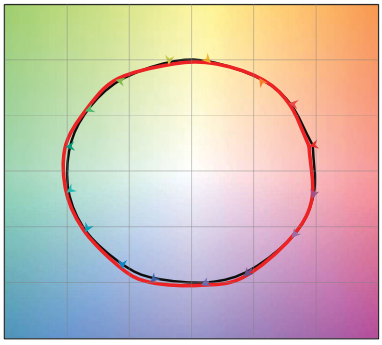

Reference Source — Test Source

4000K


COLOR VECTOR GRAPHIC

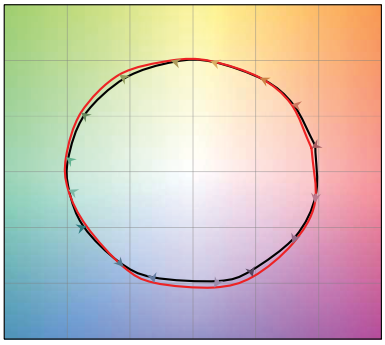

Reference Source — Test Source

6500K


COLOR VECTOR GRAPHIC

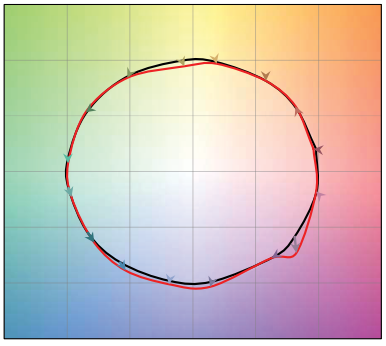


Reference Source — Test Source


Photometry


20° Faceted Reflector

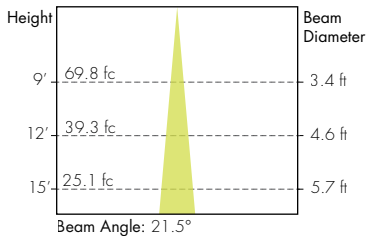





30° Faceted Reflector

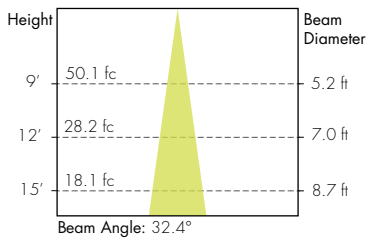



60° Faceted Reflector

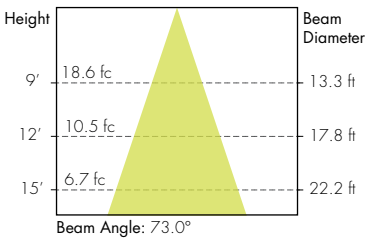



*LUMINII RESERVES THE RIGHTS TO CHANGE SPECIFICATION & INSTRUCTION WITHOUT NOTICE