

## Features

- Faceted and Smooth metal reflectors provide beam spreads between 10° to 80°.
- Nine drivers selections available to cover wide range of applications.
- Three output options available up to 1000 lumens.
- 5 year warranty.


## Finish Options

<input type="checkbox"/> White	<input checked="" type="checkbox"/> Mocha
<input checked="" type="checkbox"/> Black	<input type="checkbox"/> Charcoal
<input type="checkbox"/> Silver	<input type="checkbox"/> Cerulean
	<input type="checkbox"/> Firebrick



RoHS

Declare

Made in Canada  
with Imported Parts

## Technical Information

TYPE	WD1830			TW2765
OUTPUT OPTIONS	700 lm	1000 lm	1300 lm	1300 lm
Fixture wattage	6.7 W	11.2 W	14.5 W	13.4 W
Delivered Lumen at full on	775 lm	859 lm	1095 lm	1145 lm
Efficacy	116 lm/W	77 lm/W	76 lm/W	85 lm/W
Center Beam Candlepower (18° Faceted Reflector)	5680 cd	1249 cd	1632 cd	7495 cd

CCT	TM-30			
	CRI	R <sub>f</sub>	R <sub>g</sub>	R <sub>g</sub>
1800K	94	90	93	61
3000K	94	89	97	72
2700K	91	90	96	59
6500K	93	87	97	73

## Ordering Code

### Fixture

MODEL	TYPE	OUTPUT	CCT	OPTIC	ACCESSORY	BODY FINISH	BAFFLE FINISH
LET115-Leto 11.5	SM - Surface Mount	07-700 lumens <sup>1</sup> 10-1000 lumens 13-1300 lumens	WD1830 - Warm Dim, 1800K-3000K TW2765 - Tunable White, 2700K-6500K <sup>6</sup>	ASM - Asymmetric	DL - Diffusing Lens	Standard WH - White BK - Black SL - Silver Premium <sup>2</sup> MA - Mocha CC - Charcoal CR - Cerulean FB - Firebrick	Standard WH - White BK - Black SL - Silver Premium <sup>2</sup> MA - Mocha CC - Charcoal CR - Cerulean FB - Firebrick

DRIVER <sup>3</sup>	DRIVER OPTIONS <sup>5</sup>

Integral Driver Example: Fixture LET115-SM-07-WD1830-ASM-DL-WH-WH-PHSD-NA  
Remote Driver Example: Fixture LET115-SM-07-WD1830-ASM-DL-WH-WH-010L-NA  
HRM-LET115-SM-07-WD1830-010L-NA

PHSD - Forward/Reverse Phase, 1% Dimming, 120V Only<sup>3</sup>

010S - 0-10V, 1% Dimming, 120/277V<sup>3</sup>

0103 - 0-10V, 1% Dimming, 347V Only

010L - EldoLED, 0-10V, Linear, 0.1% Dimming, 120/277V

010G - EldoLED, 0-10V, Log, 0.1% Dimming, 120/277V

DALI - EldoLED, DALI Protocol 2, DT-6, 0.1% Dimming, 120/277V (Standard as LOG)<sup>7</sup>

DALI8 - EldoLED, DALI Protocol 2, DT-8, 0.1% Dimming, 120/277V (Standard as LOG)<sup>7</sup>

LUTE - Lutron Hilume Ecodigital, 1% Dimming, 120V/277V

DMX - EldoLED, DMX, 0.1% Dimming, 120V/277V

NA - None

EMG - Emergency Driver<sup>4</sup>

1 - 700 lumens is not available with LUTE driver.

2 - Premium finishes may have extended lead times. Custom RALs are available, please consult Inside Sales with specific request.

3 - All drivers remote except PHSD/010S driver options.

4 - Emergency option comes prewired from factory with driver in remote housing. 8W of continuous power provided for a minimum of 90 minutes. Must be installed within 30 feet of luminaire using 18 AWG wire. Not available with 0103, DMX, DALI8 or LUTE Driver.

5 - AWNR/CSMB available upon request, contact Senso for details.

6 - TW2765 only available with 13 lumens and 010L/010G/DALI8/DMX. Always remote mounted. Cannot use with EMG.

7 - DALI and DALI8 driver options use logarithmic dimming curve as standard. For LINEAR dimming curve, add "LIN" after the dimming code, i.e. DALI LIN

CONTACT FACTORY FOR MORE OPTIONS.

## Lens

### DL

Diffusing Lens



Light Loss Factor: 87%\*

\*Light Loss Factor calculated with 60° faceted reflector.


## Remote Driver Housing

Depending on the options selected in the order code on page 1, a Remote Driver Housing may be required. This will automatically be generated and put on your order as necessary.

REMOTE DRIVER	MODEL	OUTPUT	CCT	DRIVER	DRIVER OPTIONS
HRM-Housing, Remote	LET115-SM- Surface Mount	Same as Fixture	Same as Fixture	Same as Fixture	Same as Fixture


Maximum mounting distance to luminaire using 18 AWG wire						
010S	PHSD	010L	010G	DALI DALI8	DMX	LUTE
16'	16'	72'	72'	72'	149'	15'

### HRM Single with Externally Mounted Driver

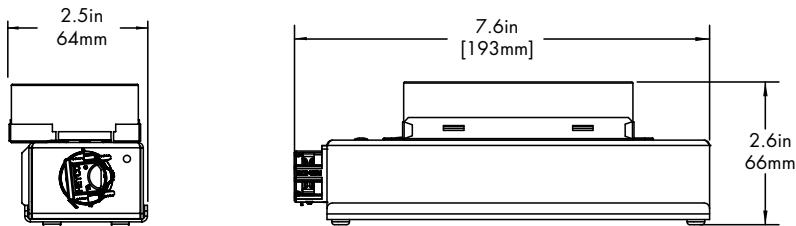


Driver
010L or 010G
010S
010L or 010G or 010S
DALI or LUTE

### HRM Single

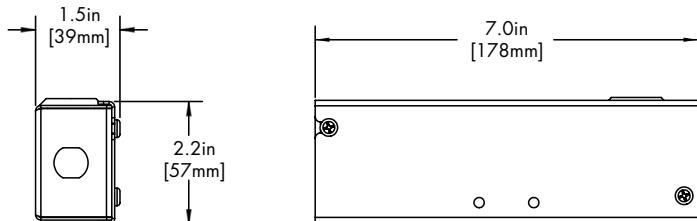

Driver
PHSD


### HRM Double

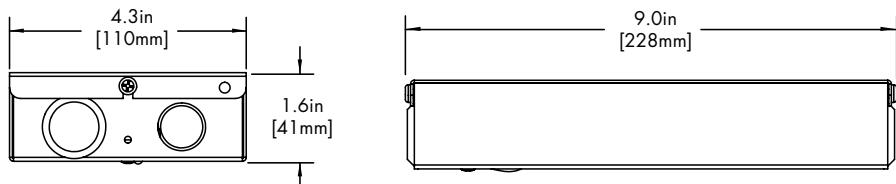

Driver
DALI8
DMX

### EMG Emergency Driver

120 minute EMG operation time.

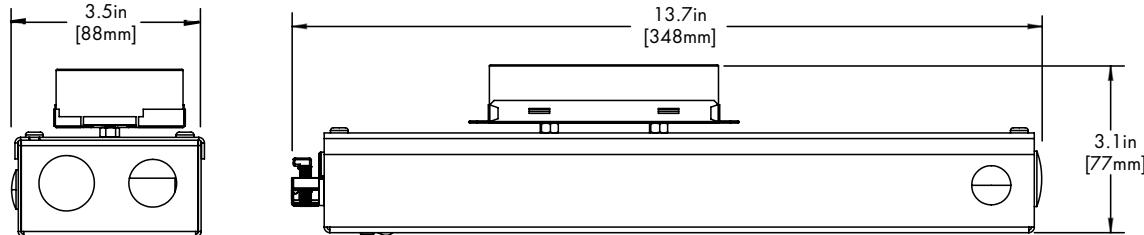

Driver
EMG

## Standard Colors

**BK**  
Black



**WH**  
White



**SL**  
Silver



## Premium Colors


**MA**  
Mocha



**CC**  
Charcoal



**CR**  
Cerulean





**FB**  
Firebrick




## Two Tone Finishes

Inside finish refers to Baffle Finish selection from page 1. Any combination may be used for baffle and body finishes.




## TM-30


## Warm Dim 1800K




## Warm Dim 3000K



## Tunable White 2700K



## Tunable White 6500K



## Photometry

## 18° Faceted Reflector

