


Features

- Nine drivers selections available to cover wide range of applications.
- Three output options available up to 2000 lumens.
- Five year warranty.

Finish Options

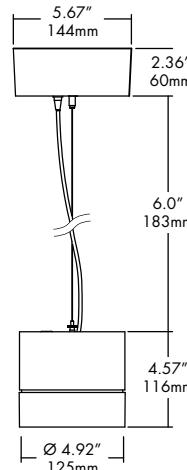

Technical Information

OUTPUT OPTIONS	700 lm	1000 lm	1300 lm
Fixture wattage	6.4 W	9.2 W	9.7 W
Delivered Lumen at 3500K	572 lm	831 lm	912 lm
Efficacy	89 lm/W	90 lm/W	94 lm/W
Center Beam Candlepower	4351 cd	6406 cd	1327 cd

CCT	Multiplier	TM-30			
		CRI	R _f	R _g	R ₉
2500K	0.81	92	90	104	77
2700K	0.92	92	91	102	61
3000K	0.97	95	92	102	61
3500K	1.00	95	93	101	72
4000K	1.07	95	92	103	68
6500K	1.05	96	91	100	89

Integral Driver Example: Fixture LET115-S-07-25K-F10-NA-WH-WH-RD-WH-FC-NA-PHSD-NA
 Remote Driver Example: Fixture LET115-S-07-25K-F10-NA-WH-WH-RD-WH-FC-NA-010L-NA
 HRM-LET115-S-07-25K-010L-NA

Ordering Code

Fixture

MODEL	TYPE	OUTPUT	CCT	OPTIC	ACCESSORY	BODY FINISH	BAFFLE FINISH
LET115-Leto 11.5	S - Suspended	07 - 700 lumens (6.4W) ¹ 10 - 1000 lumens (9.2W) 13 - 1300 lumens (9.7W)	25K - 2500K 27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K 65K - 6500K	ASM - Asymmetric	DL - Diffusing Lens	Standard WH - White BK - Black SL - Silver	Standard WH - White BK - Black SL - Silver
						Premium ² MA - Mocha CC - Charcoal CR - Cerulean FB - Firebrick	Premium ² MA - Mocha CC - Charcoal CR - Cerulean FB - Firebrick
CANOPY/ HOUSING	CANOPY FINISH	SUSPENSION TYPE	SUSPENSION FINISH		DRIVER		DRIVER OPTIONS
RD - Round	Standard	2AF - 2AC+Feed Cable	Standard				NA - None
RTL - Round Trimless ^{3,5}	WH - White	SS2 - Solid Stem, 2ft	NA - None ⁷				EMG - Emergency Driver ^{3,8}
SQ - Square	BK - Black	SS3 - Solid Stem, 3ft	CL - Clear ¹¹				CSMB - Casambi ^{9,10}
	SL - Silver	SS6 - Solid Stem, 6ft	WH - White				AWNR - Athena ^{9,10}
		HS2 - Hang Straight, 2ft ⁵	BK - Black				
		HS3 - Hang Straight, 3ft ⁵	SL - Silver ⁶				
		HS6 - Hang Straight, 6ft ⁵					
		POA - 2 Powered Aircraft					

RD - Round	Standard	2AF - 2AC+Feed Cable	Standard				NA - None
RTL - Round Trimless ^{3,5}	WH - White	SS2 - Solid Stem, 2ft	NA - None ⁷				EMG - Emergency Driver ^{3,8}
SQ - Square	BK - Black	SS3 - Solid Stem, 3ft	CL - Clear ¹¹				CSMB - Casambi ^{9,10}
	SL - Silver	SS6 - Solid Stem, 6ft	WH - White				AWNR - Athena ^{9,10}
		HS2 - Hang Straight, 2ft ⁵	BK - Black				
		HS3 - Hang Straight, 3ft ⁵	SL - Silver ⁶				
		HS6 - Hang Straight, 6ft ⁵					
		POA - 2 Powered Aircraft					

1 - 700 lumens is not available with LUTE driver.
 2 - Premium finishes may have extended lead times. Custom RALs are available, please consult Inside Sales with specific request.
 3 - All drivers remote mounted when using RTL canopy, DALI8 driver, DMX driver, or EMG driver options.
 4 - Requires square canopy SQ for integral driver, otherwise remote mounted.
 5 - RTL canopy is not available with HS2/HS3/HS6 suspension.
 6 - These finishes are only available with SS Solid Stem or HS Hang Straight.
 7 - Must select NA None when POA option is selected.

CONTACT FACTORY FOR MORE OPTIONS.

Canopy

RD

Round Canopy

	Integral Drivers	Remote Drivers
010S	010L	
0103	010G	
PHSD	DALI	
	DALI8	
	LUTE	
	DMX	

Please see next page for Remote Driver Housing details.

RTL

Round Trimless Canopy

	Integral Drivers	Remote Drivers
N/A	010S	
	0103	
	PHSD	
	010L	
	010G	
	DALI	
	DALI8	
	LUTE	
	DMX	

SQ

Square Canopy

	Integral Drivers	Remote Drivers
010S	DMX	
0103	DALI8	
PHSD		
010L		
010G		
DALI		
DALI8		
LUTE		

Suspension

2AF

2 Aircraft + Feed Cable



SSX (2', 3', 6' max)

Solid Stem



HSX (2', 3', 6' max)

Hang Straight Solid Stem



POA

2 Powered Aircraft



Maximum Slope: 30°

Lens

DL

Diffusing Lens



Light Loss Factor: 87%*

*Light Loss Factor calculated with 60° faceted reflector.


Remote Driver Housing

Depending on the options selected in the order code on page 1, a Remote Driver Housing may be required. This will automatically be generated and put on your order as necessary.

REMOTE DRIVER	MODEL	OUTPUT	CCT	DRIVER	DRIVER OPTIONS
HRM-Housing, Remote	LET115-S- <i>LeTo 11.5 Suspended</i>	Same as Fixture	Same as Fixture	Same as Fixture	Same as Fixture


Maximum mounting distance to luminaire using 18 AWG wire						
010S	PHSD	010L	010G	DALI DALI8	DMX	LUTE
16'	16'	72'	72'	72'	149'	15'

HRM Single with Externally Mounted Driver

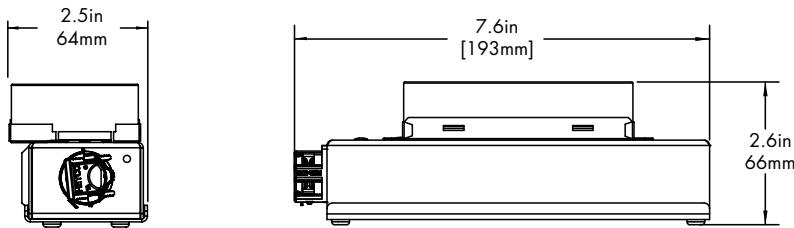


Canopy	+	Driver
RTL or RD	+	010L or 010G
RTL or RD	+	010S
RTL	+	010L or 010G or 010S
RTL or RD	+	DALI or LUTE

HRM Single

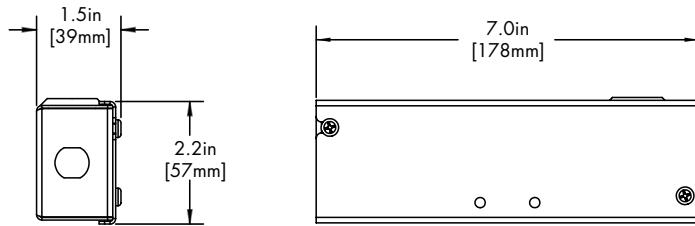

Canopy	+	Driver
RTL	+	PHSD


HRM Double

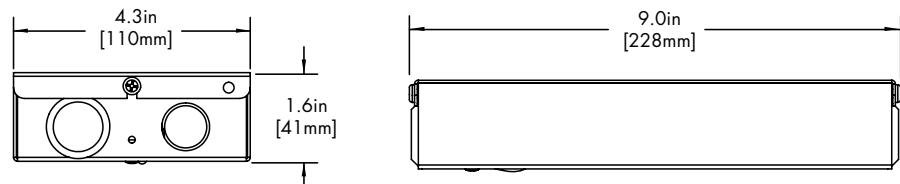

Driver
DALI8
DMX

EMG Emergency Driver

120 minute EMG operation time.

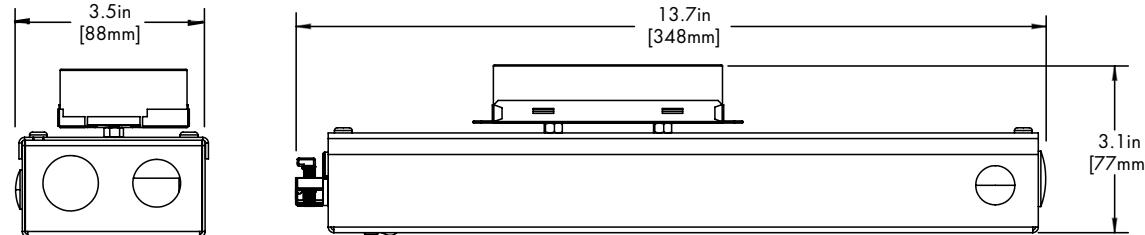

Driver
EMG

Standard Colors

BK
Black



WH
White



SL
Silver



Premium Colors

MA
Mocha



CC
Charcoal



CR
Cerulean





FB
Firebrick




Two Tone Finishes

Inside finish refers to Baffle Finish selection from page 1. Any combination may be used for baffle and body finishes.




TM-30


2500K

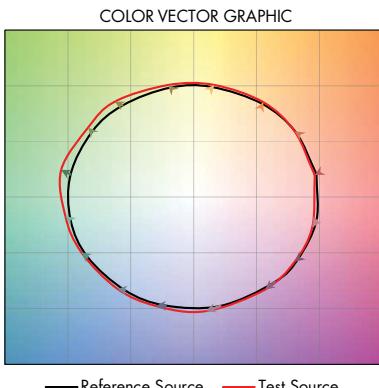


2700K

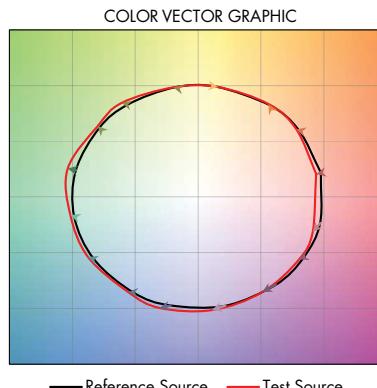


3000K

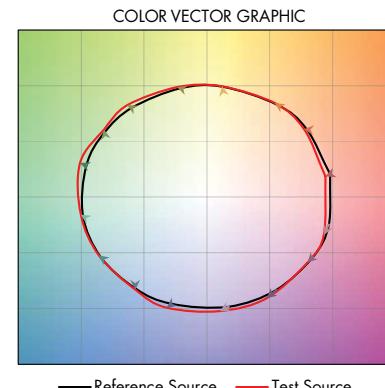


3500K

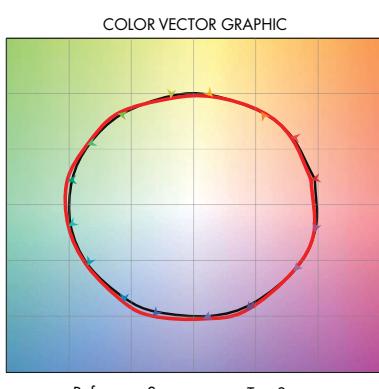

4000K

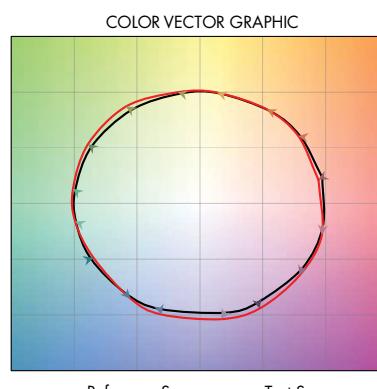

6500K

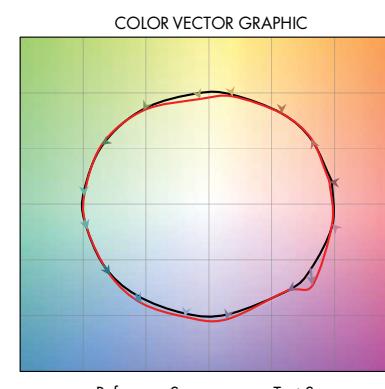

Photometry

Diffusing Lens

