


### Features

- Faceted and Smooth metal reflectors provide beam spreads between 10° to 80°.
- Nine drivers selections available to cover wide range of applications.
- Three output options available up to 1500 lumens.
- Five year warranty.

### Finish Options

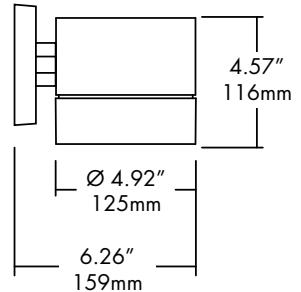

### Technical Information

OUTPUT OPTIONS	700 lm	1000 lm	1300 lm
<b>Fixture wattage</b>	6.4 W	9.2 W	9.7 W
<b>Delivered Lumen at 3500K</b>	572 lm	831 lm	912 lm
<b>Efficacy</b>	89 lm/W	90 lm/W	94 lm/W
<b>Center Beam Candlepower (18° Faceted Reflector)</b>	4351 cd	6406 cd	1327 cd

CCT	Multiplier	TM-30		
		R <sub>f</sub>	R <sub>g</sub>	R <sub>q</sub>
2500K	0.81	92	90	104
2700K	0.92	92	91	102
3000K	0.97	95	92	102
3500K	1.00	95	93	101
4000K	1.07	95	92	103
6500K	1.05	96	91	100

Integral Driver Example: Fixture LET115-WM-07-25K-ASM-DL-WH-WH-PHSD-NA  
 Remote Driver Example: Fixture LET115-WM-07-25K-ASM-DL-WH-WH-010L-NA  
 HRM-LET115-WM-07-25K-010L-NA

### Ordering Code

#### Fixture

MODEL	TYPE	OUTPUT	CCT	OPTIC	ACCESSORY	BODY FINISH	BAFFLE FINISH
LET115-Leto 11.5	WM-Wall Mount	07-700 lumens (6.4W) 10-1000 lumens (9.2W) 13-1300 lumens (9.7W)	25K - 2500K 27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K 65K - 6500K	ASM - 18°, Asymmetric	DL - Diffusing Lens	Standard WH - White BK - Black SL - Silver Premium <sup>2</sup> MA - Mocha CC - Charcoal CR - Cerulean FB - Firebrick	Standard WH - White BK - Black SL - Silver Premium <sup>2</sup> MA - Mocha CC - Charcoal CR - Cerulean FB - Firebrick

DRIVER<sup>3</sup>

DRIVER OPTIONS<sup>5</sup>

NA - None  
EMG - Emergency Driver<sup>4</sup>

PHSD - Forward/Reverse Phase, 1% Dimming, 120V Only  
 010S - 0-10V, 1% Dimming, 120/277V  
 0103 - 0-10V, 1% Dimming, 347V Only  
 010L - EldoLED, 0-10V, Linear, 0.1% Dimming, 120/277V  
 010G - EldoLED, 0-10V, Log, 0.1% Dimming, 120/277V  
 DALI - EldoLED, DALI Protocol 2, DT-6, 0.1% Dimming, 120/277V (Standard as LOG)<sup>6</sup>  
 DALI8 - EldoLED, DALI Protocol 2, DT-8, 0.1% Dimming, 120/277V (Standard as LOG)<sup>6</sup>  
 LUTE - Lutron Hilitume Ecodigital, 1% Dimming, 120V/277V  
 DMX - EldoLED, DMX, 0.1% Dimming, 120V/277V

1 - 700 lumens is not available with LUTE driver.

2 - Premium finishes may have extended lead times. Custom RALs are available, please consult Inside Sales with specific request.

3 - All drivers remote except PHSD/010S driver options.

4 - Emergency option comes prewired from factory with driver in remote housing. 8W of continuous power provided for a minimum of 90 minutes. Must be installed within 30 feet of luminaire using 18 AWG wire. Not available with 0103, DMX, DALI8 or LUTE Driver.

5 - AVNR/CSMB available upon request, contact Senso for details.

6 - DALI and DALI8 driver options use logarithmic dimming curve as standard. For LINEAR dimming curve, add "LIN" after the dimming code, i.e. DALI LIN

CONTACT FACTORY FOR MORE OPTIONS.

### **Lens**

---

#### **DL**

Diffusing Lens

---



Light Loss Factor: 87%\*

\*Light Loss Factor calculated with 60° faceted reflector.


## Remote Driver Housing

Depending on the options selected in the order code on page 1, a Remote Driver Housing may be required. This will automatically be generated and put on your order as necessary.

REMOTE DRIVER	MODEL	OUTPUT	CCT	DRIVER	DRIVER OPTIONS
HRM-Housing, Remote	LET115-WM-Leto 11.5 Wall Mount	Same as Fixture	Same as Fixture	Same as Fixture	Same as Fixture


Maximum mounting distance to luminaire using 18 AWG wire						
010S	PHSD	010L	010G	DALI DALI8	DMX	LUTE
16'	16'	72'	72'	72'	149'	15'

### HRM Single with Externally Mounted Driver

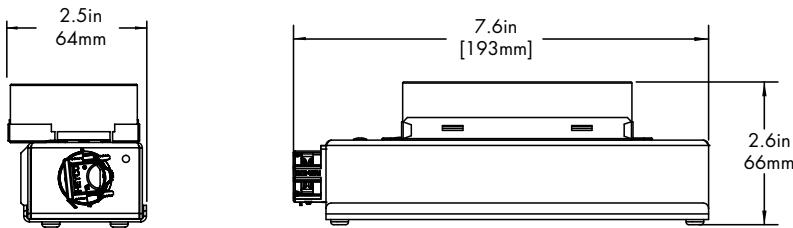


Driver
010L or 010G
010S
010L or 010G or 010S
DALI or LUTE

### HRM Single

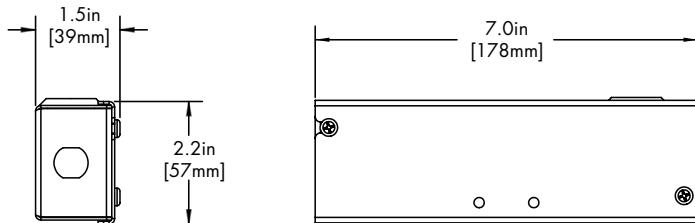

Driver
PHSD


### HRM Double

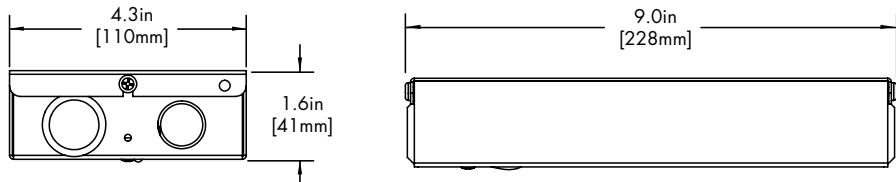

Driver
DALI8
DMX

### EMG Emergency Driver

120 minute EMG operation time.

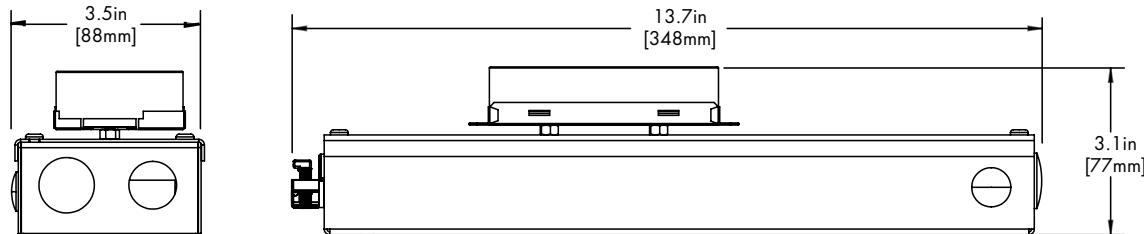

Driver
EMG

### Standard Colors

**BK**  
Black



**WH**  
White



**SL**  
Silver



### Premium Colors

**MA**  
Mocha



**CC**  
Charcoal



**CR**  
Cerulean





**FB**  
Firebrick




### Two Tone Finishes

Inside finish refers to Baffle Finish selection from page 1. Any combination may be used for baffle and body finishes.




### TM-30


**2500K**

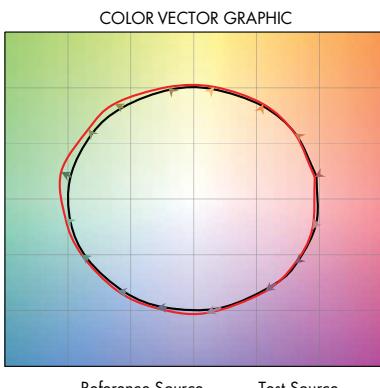


**2700K**

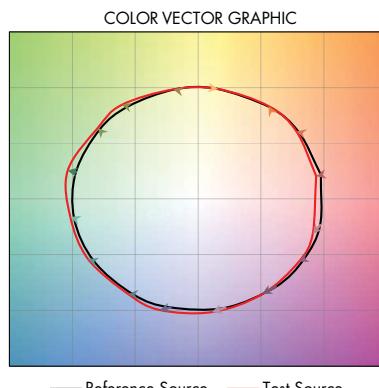


**3000K**

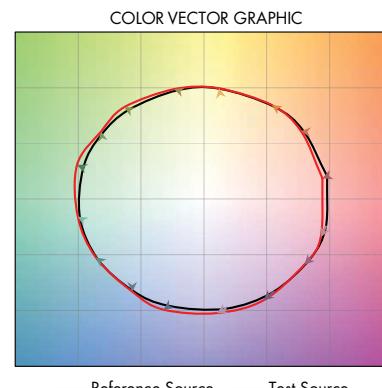


**3500K**

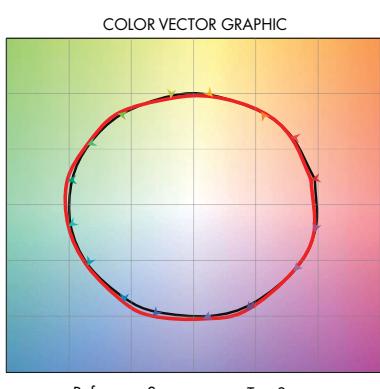

**4000K**

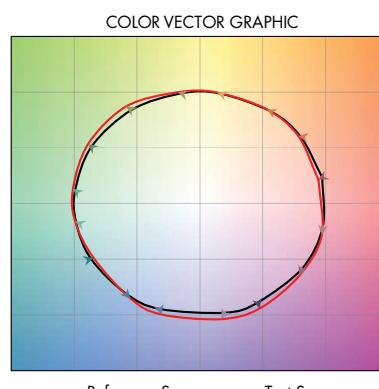

**6500K**

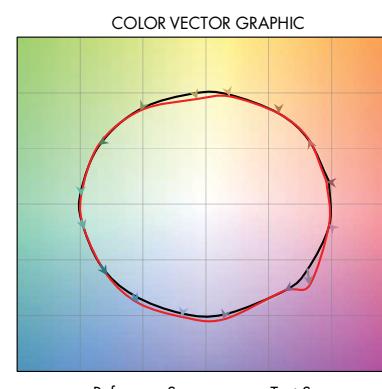

### Photometry

#### 18° Faceted Reflector

