


## Features

- Three output options available up to 1500 lumens.
- Nine driver selections available to cover wide range of applications.
- Five year warranty.

## Finish Options

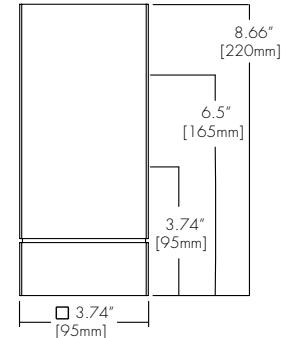

## Technical Information

OUTPUT OPTIONS	700 lm	1000 lm	1500lm
<b>Fixture wattage</b>	6.2 W	9.6 W	14.6 W
<b>Delivered Lumen at 3500K</b>	540 lm	824 lm	1281 lm
<b>Efficacy</b>	108 lm/W	110 lm/W	109 lm/W
<b>Center Beam Candlepower (15° Faceted Reflector)</b>	921 cd	1405 cd	2185 cd

CCT	Multiplier	CRI	TM-30		
			R <sub>f</sub>	R <sub>g</sub>	R <sub>9</sub>
2500K	0.81	92	90	104	77
2700K	0.92	92	91	102	61
3000K	0.97	95	92	102	61
3500K	1.00	95	93	101	72
4000K	1.07	95	92	103	68
6500K	1.05	96	91	100	89

## Ordering Code

### Fixture

MODEL	TYPE	SIZE	OUTPUT	CCT	OPTIC	ACCESSORY	BODY FINISH	BAFFLE FINISH
LET44	SM - Surface Mount	S - Small <sup>1</sup> M - Medium L - Large	07-700 (6.2W) 10-1000 (9.6W) 15-1500 (14.6W)	25K-2500K 27K-2700K 30K-3000K 35K-3500K 40K-4000K 65K-6500K	ASM - Asymmetric	DL - Diffusing Lens	Standard WH - White BK - Black SL - Silver Premium <sup>2</sup> MA - Mocha CC - Charcoal CR - Cerulean FB - Firebrick	Standard WH - White BK - Black SL - Silver Premium <sup>2</sup> MA - Mocha CC - Charcoal CR - Cerulean FB - Firebrick

DRIVER	DRIVER OPTIONS <sup>6</sup>
PHSD	-

PHSD - Forward/Reverse Phase, 1% Dimming, 120V Only  
 010S - 0-10V, 1% Dimming, 120/277V  
 0103 - 0-10V, 1% Dimming, 347V Only<sup>4</sup>  
 010L - EldoLED, 0-10V, Linear, 0.1% Dimming, 120/277V<sup>4</sup>  
 010G - EldoLED, 0-10V, Log, 0.1% Dimming, 120/277V<sup>4</sup>  
 DALI - EldoLED, DALI Protocol 2, DT-6, 0.1% Dimming, 120/277V  
 (Standard as LOG)<sup>4,7</sup>  
 DALI8 - EldoLED, DALI Protocol 2, DT-8, 0.1% Dimming, 120/277V  
 (Standard as LOG)<sup>4,7</sup>  
 LUTE - Lutron Hilume Ecodigital, 1% Dimming, 120V/277V<sup>3,4</sup>  
 DMX - EldoLED, DMX, 0.1% Dimming, 120V/277V<sup>4</sup>

NA - None  
 EMG - Emergency Driver<sup>4,5</sup>

1 - Size Small max output is 1000 lumens.  
 2 - Premium finishes may have extended lead times. Custom RALs are available, please consult Inside Sales with specific request.

3 - LUTE driver is not available at 700 lumens.

4 - Drivers: 0103/010L/010G/DALI/DALI8/DMX/LUTE/EMG always require a remote driver.

5 - Emergency option comes prewired from factory with driver in remote housing. 8W of continuous power provided for a minimum of 90 minutes. Must be installed within 30 feet of luminaire using 18 AWG wire. Not available with 0103, DMX, DALI8 or LUTE Driver.

6 - AVNRC/CSMB available upon request, contact Senso for details.  
 7 - DALI and DALI8 driver options use logarithmic dimming curve as standard. For LINEAR dimming curve, add "LIN" after the dimming code, i.e. DALILIN

CONTACT FACTORY FOR MORE OPTIONS.

### **Lens**

---

#### **DL**

Diffusing Lens

---



## Remote Driver Housing


Depending on the options selected in the order code on page 1, a Remote Driver Housing may be required. This will automatically be generated and put on your order as necessary.

REMOTE DRIVER	MODEL	OUTPUT	CCT	DRIVER	DRIVER OPTIONS
HRM·Housing, Remote	LET44-SM·Leto 44 Surface Mount	Same as Fixture	Same as Fixture	Same as Fixture	Same as Fixture

Maximum mounting distance to luminaire using 18 AWG wire								
PHSD	010S	0103	010L	010G	DALI	DALI8	LUTE	DMX
16'	16'	16'	72'	72'	72'	72'	15'	149'


### 4" J-box

Minimum volume required to mount drivers in junction box: 70mm x 40mm x 30mm.

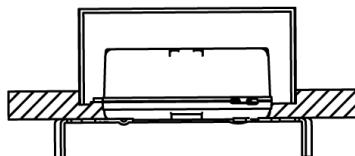


Driver
PHSD
010S

### HRM Single with Externally Mounted Driver

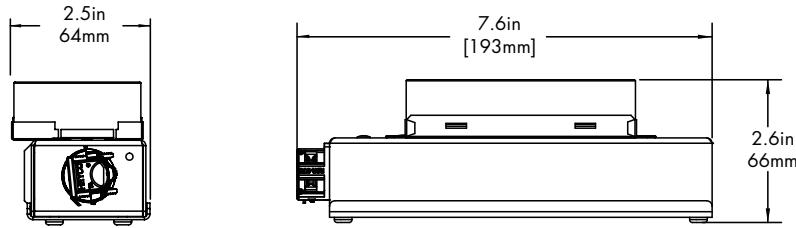

Driver
0103
010L
010G
DALI
LUTE


### HRM Double

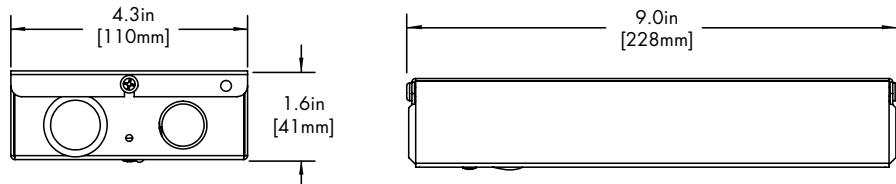

Driver
DALI8
DMX

### EMG Emergency Driver

120 minute EMG operation time.

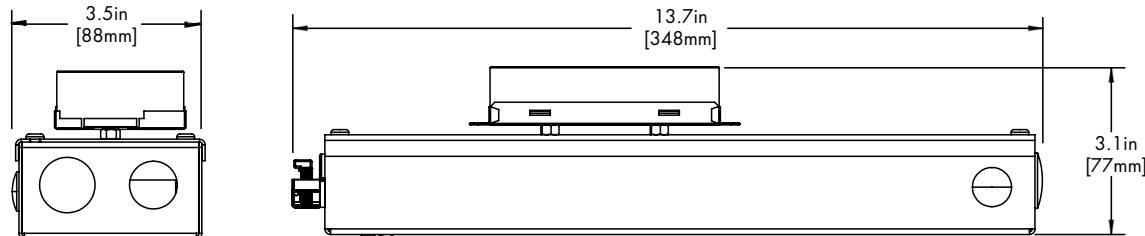

Driver
EMG

### Standard Finish

**BK**  
Black



**WH**  
White



**SL**  
Silver



### Premium Finish

Two tone with Black Baffle Finish. Any combination may be used for baffle and body finishes.

**MA**  
Mocha



**CC**  
Charcoal



**CR**  
Cerulean




**FB**  
Firebrick




## TM-30


2500K

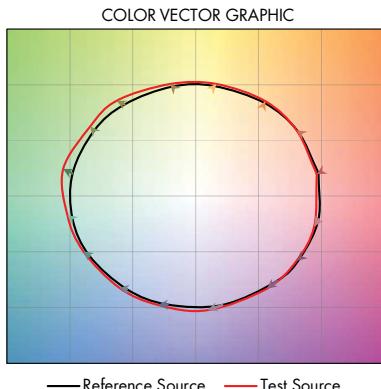


2700K

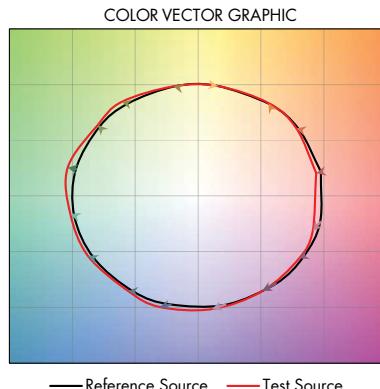


3000K

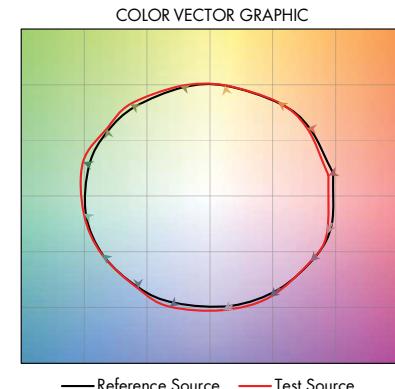


3500K

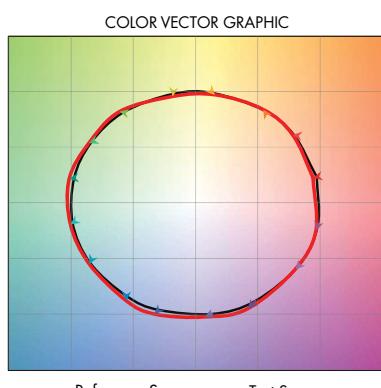

4000K

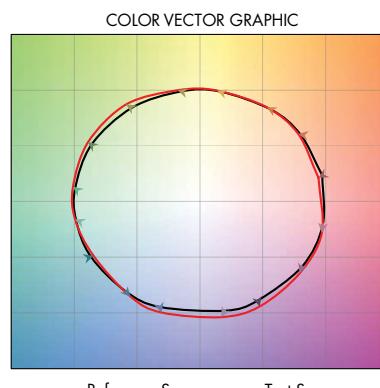

6500K

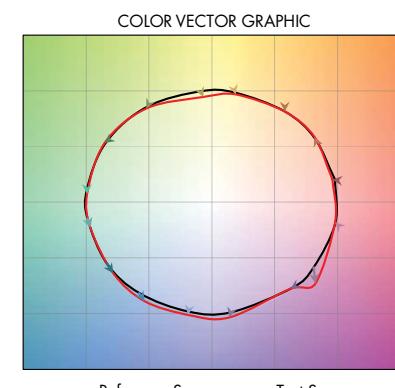

## Photometry

## ASM - Asymmetric

