

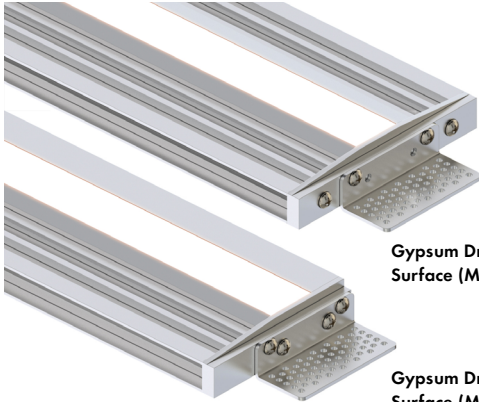




Gypsum Drywall Surface (Mud In)

Gypsum Drywall Surface (Mud In) to Hard Surface



Features

- 24VDC Class 2 fixtures made to order up to 144". Fixtures can be linked up to 90' depending on output
- Available with plenum rated wire leads or with integral junction box for splice connection
- Class 2 listed for damp locations
- Dot free even illumination
- Proprietary strong bond solder method handles up to 50 lbs of pull force on wire leads and connectors
- Approved for closet/storage space installation per NEC 410.16(A) (3) and 410.16(C)(5) on outputs 5.7 W/ft or less
- Vibrant Color options offer premium color quality with R9 values up to 98
- High Efficacy options offer best in class output and efficacy with 660 lm/ft and up to 78 lm/W
- Average Life (L70): 50,000hrs
- 7 year warranty



Technical Information

TYPE	Vibrant Color VC72						
OUTPUT OPTIONS	VC72VLO	VC72LO	VC72SO	VC72MO	VC72HO	VC72VHO	VC72XHO
Lumens Output (3000K) (with a Frosted Lens)	62 lm/ft	157 lm/ft	209 lm/ft	277 lm/ft	334 lm/ft	445 lm/ft	1062 lm/ft
Average Power Consumption (for a 4' section)	1.1 W/ft	2.8 W/ft	3.7 W/ft	4.9 W/ft	5.9 W/ft	7.9 W/ft	19.8 W/ft
Efficacy	56 lm/W	56 lm/W	56 lm/W	57 lm/W	57 lm/W	56 lm/W	54 lm/W
Max Run Length (in series)	56.9 ft	32 ft	28 ft	24 ft	21 ft	18 ft	12 ft
Ambient Operating Temperature Range*	-4°F - 122°F (-20°C - 50°C)						

* Ambient Operating Temperature Range to maintain L70 of 50k+ hours in normal mounting conditions for the fixture. Exceeding Ambient Operating Temperature Range may result in decreased life/output. Consult Technical Support for specific inquiries.

TYPE	High Efficacy HE64						
OUTPUT OPTIONS	HE64VLO	HE64LO	HE64SO	HE64MO	HE64HO	HE64VHO	HE64XHO
Lumens Output (3000K) (with a Frosted Lens)	68 lm/ft	148 lm/ft	212 lm/ft	281 lm/ft	400 lm/ft	548 lm/ft	660 lm/ft
Average Power Consumption (for a 4' section)	1 W/ft	1.9 W/ft	2.9 W/ft	3.8 W/ft	5.6 W/ft	7.1 W/ft	8.9 W/ft
Efficacy	68 lm/W	78 lm/W	73 lm/W	74 lm/W	71 lm/W	77 lm/W	74 lm/W
Max Run Length (in series)	90 ft	54 ft	34.9 ft	26 ft	17 ft	13 ft	10.3 ft
Ambient Operating Temperature Range*	-4°F - 122°F (-20°C - 50°C)						

* Ambient Operating Temperature Range to maintain L70 of 50k+ hours in normal mounting conditions for the fixture. Exceeding Ambient Operating Temperature Range may result in decreased life/output. Consult Technical Support for specific inquiries.

Vibrant Color (VC72)						
CCT	Multiplier (ref. - 30K)	TM-30				
		CRI	R _f	R _g	R ₉	
1800K	0.50	95	94	99	86	
2200K	0.66	96	94	101	95	
2400K	0.90	98	96	101	91	
2700K	0.93	98	96	102	93	
3000K	1.00	97	94	104	99	
3500K	1.04	96	94	105	97	
4100K	1.05	97	95	104	96	

High Efficacy (HE64)						
CCT	Multiplier (ref. - 30K)	TM-30				
		CRI	R _f	R _g	R ₉	
2200K	0.74	94	91	96	65	
2400K	0.87	94	92	97	56	
2700K	0.97	94	92	100	57	
3000K	1.00	93	91	99	54	
3500K	1.01	95	91	99	62	
4000K	1.04	95	91	99	68	







Ordering Code

MODEL	LENGTH ¹	OUTPUT ²	CCT	LENS	MOUNTING	LEFT END CAP	RIGHT END CAP	POWER SUPPLY TYPE
LIN-Lini	12"-144" 1" increments	VC72VLO-Very Low VC72LO-Low VC72SO-Standard VC72MO-Medium VC72HO-High VC72VHO-Very High VC72XHO-Extreme	18K-1800K 22K-2200K 24K-2400K 27K-2700K 30K-3000K 35K-3500K 41K-4100K	F-Frosted FS-Frosted Silicone Lens N-No Lens	GDS-Gypsum Drywall Surface DHS-Drywall to Hard Surface	LE-Endcap Left End LN-No Endcap Left End	RE-Endcap Right End RN-No Endcap Right End	CPB-Center Power Feed, Plenum rated 72" wires CJB-Center Power Feed, Junction Box
	12"-144" 2" increments	HE64VLO-Very Low HE64LO-Low HE64SO-Standard HE64MO-Medium HE64HO-High HE64VHO-Very High HE64XHO-Extreme	22K-2200K 25K-2500K 27K-2700K 30K-3000K 35K-3500K 40K-4000K			LE-Endcap Left End LN-No Endcap Left End LNJ-No Endcap Left End, with jumper	RNJ-No Endcap Right End, with jumper RE-Endcap Right End RNJ-No Endcap Right End, with jumper	CPB-Center Power Feed, Plenum rated 72" wires CJB-Center Power Feed, Junction Box CNPF-No Power Feed

1 - Custom Angle Corners are available, please consult Inside Sales with specific request.

2 - Title 24 JAB achievable depending on Output, CCT, and Lens selections. See multiplier charts to calculate specific efficacies.

Linii GDS Corner Options

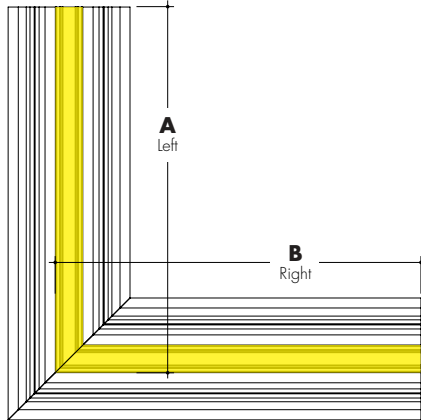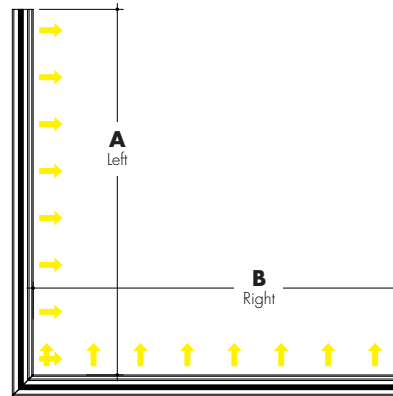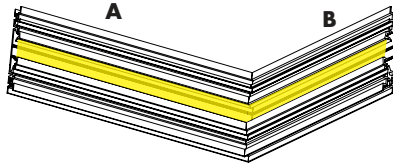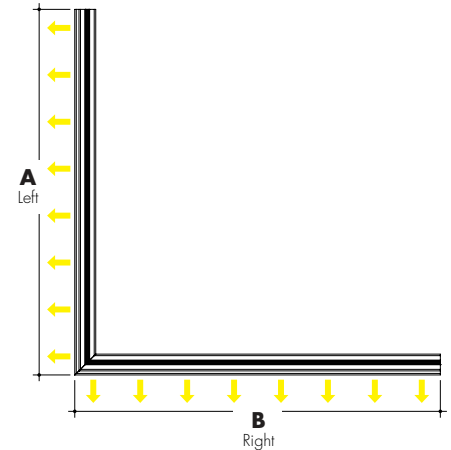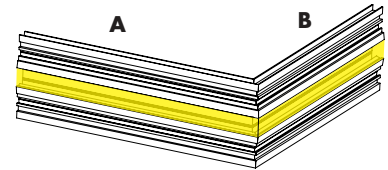LIN-FC
Flat Corner

LIN-IC
Inner Corner

LIN-OC
Outside Corner


Vibrant Color	Actual Length		Total Wattage						
	A	B	VC72VLO	VC72LO	VC72SO	VC72MO	VC72HO	VC72VHO	VC72XHO
Flat (LIN-FC)	12 7/16"	12 12/16"	2.2	5.7	7.4	9.9	12.7	16.0	21.4
Inner (LIN-IC)	11 8/16"	11 8/16"	2.2	5.7	7.4	9.9	12.7	16.0	21.4
Outer (LIN-OC)	12 12/16"	12 12/16"	2.2	5.7	7.4	9.9	12.7	16.0	21.4

High Color Quality	Actual Length		Total Wattage						
	A	B	HE64VLO	HE64LO	HE64SO	HE64MO	HE64HO	HE64VHO	HE64XHO
Flat (LIN-FC)	12 10/16"	13 2/16"	2.0	3.9	6.0	8.2	11.8	14.8	19.0
Inner (LIN-IC)	11 12/16"	11 12/16"	2.0	3.9	6.0	8.2	11.8	14.8	19.0
Outer (LIN-OC)	13"	13"	2.0	3.9	6.0	8.2	11.8	14.8	19.0

Ordering Code

MODEL	CORNER TYPE	ANGLE ¹	OUTPUT ²	CCT	LENS	MOUNTING	LEFT END CAP ³	RIGHT END CAP ³	POWER SUPPLY TYPE
LIN - Lini	IC - Inner Corner OC - Outer Corner FC - Flat Corner	90-90° Corner C Custom Angle Corner ¹	VC72VLO - Very Low VC72LO - Low VC72SO - Standard VC72MO - Medium VC72HO - High VC72VHO - Very High VC72XHO - Extreme	18K - 1800K 22K - 2200K 24K - 2400K 27K - 2700K 30K - 3000K 35K - 3500K 41K - 4100K	F - Frosted Lens FS - Frosted Silicone Lens N - No Lens	GDS - Gypsum Drywall Surface	LE - Endcap Left End LN - No Endcap Left End	RE - Endcap Right End RN - No Endcap Right End	CPB - Center Power Feed, Plenum rated 72" wires CJB - Center Power Feed, Junction Box
			HE64VLO - Very Low HE64LO - Low HE64SO - Standard HE64MO - Medium HE64HO - High HE64VHO - Very High HE64XHO - Extreme	22K - 2200K 25K - 2500K 27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K			LE - Endcap Left End LN - No Endcap Left End LNJ - No Endcap Left End, with jumper	RNJ - No Endcap Right End, with jumper RNJ - No Endcap Right End, with jumper	CPB - Center Power Feed, Plenum rated 72" wires CJB - Center Power Feed, Junction Box CNPF - No Power Feed
							LNJ - No Endcap Left End, with jumper	RE - Endcap Right End RN - No Endcap Right End RNJ - No Endcap Right End, with jumper	CPB - Center Power Feed, Plenum rated 72" wires CJB - Center Power Feed, Junction Box CNPF - No Power Feed

1 - Custom Angle Corners are available, please consult Inside Sales with specific request.


2 - Title 24 JA8 achievable depending on Output, CCT, and Lens selections. See multiplier charts to calculate specific efficacies.

3 - Lini Corner fixtures cannot be paired with straight Lini Fixture that have endcaps on both ends (LE-RE). Lini Corner can only connect to another Lini Corner fixture or a straight Lini Fixture that is missing at least one endcap.

Linii DHS Corner Options


LIN-FC1

Flat Corner (Option 1)

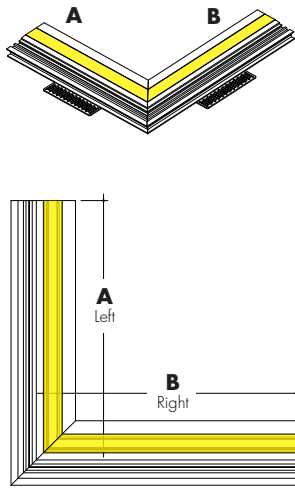


LIN-FC2

Flat Corner (Option 2)

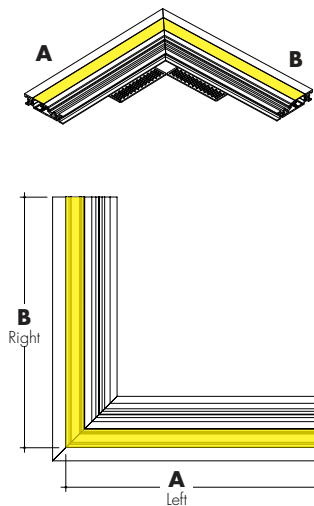


LIN-IC

Inner Corner

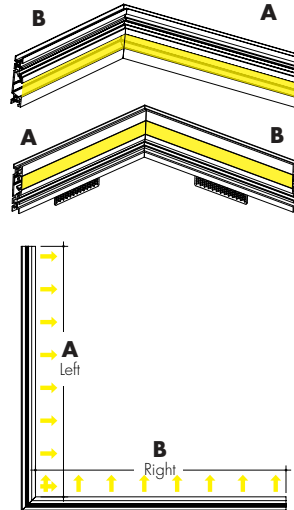

LIN-OC

Outside Corner

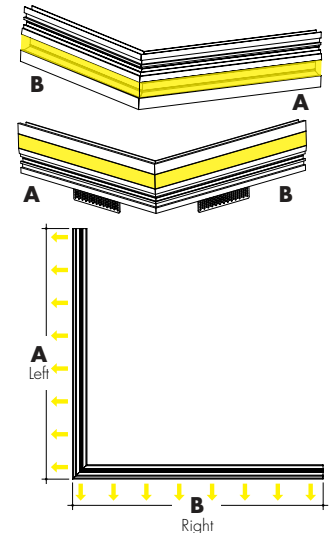

Vibrant Color	Actual Length		Total Wattage						
Corner Type	A	B	VC72VLO	VC72LO	VC72SO	VC72MO	VC72HO	VC72VHO	VC72XHO
Flat Option 1 (LIN-FC1)	12 7/16"	12 12/16"	2.2	5.7	7.4	9.9	12.7	16.0	21.4
Flat Option 2 (LIN-FC2)	12 7/16"	12 12/16"	2.2	5.7	7.4	9.9	12.7	16.0	21.4
Inner (LIN-IC)	11 8/16"	11 8/16"	2.2	5.7	7.4	9.9	12.7	16.0	21.4
Outer (LIN-OC)	12 12/16"	12 12/16"	2.2	5.7	7.4	9.9	12.7	16.0	21.4

High Color Quality	Actual Length		Total Wattage						
Corner Type	A	B	HE64VLO	HE64LO	HE64SO	HE64MO	HE64HO	HE64VHO	HE64XHO
Flat Option 1 (LIN-FC1)	12 10/16"	13 2/16"	2.0	3.9	6.0	8.2	11.8	14.8	19.0
Flat Option 2 (LIN-FC2)	12 10/16"	13 2/16"	2.0	3.9	6.0	8.2	11.8	14.8	19.0
Inner (LIN-IC)	11 12/16"	11 12/16"	2.0	3.9	6.0	8.2	11.8	14.8	19.0
Outer (LIN-OC)	13"	13"	2.0	3.9	6.0	8.2	11.8	14.8	19.0

Ordering Code

MODEL	CORNER TYPE	ANGLE ¹	OUTPUT ²	CCT	LENS	MOUNTING	LEFT END CAP ³	RIGHT END CAP ³	POWER SUPPLY TYPE
LIN - Linii	IC - Inner Corner OC - Outer Corner FC1 - Flat Corner (option 1) FC2 - Flat Corner (option 2)	90 - 90° Corner C Custom Angle Corner	VC72VLO - Very Low VC72LO - Low VC72SO - Standard VC72MO - Medium VC72HO - High VC72VHO - Very High	18K - 1800K 22K - 2200K 24K - 2400K 27K - 2700K 30K - 3000K 35K - 3500K 41K - 4100K	F - Frosted Lens FS - Frosted Silicone Lens N - No Lens	DHS - Drywall to Hard Surface	LE - Endcap Left End LN - No Endcap Left End	RE - Endcap Right End RN - No Endcap Right End	CPB - Center Power Feed, Plenum rated 72" wires CJB - Center Power Feed, Junction Box
			HE64VLO - Very Low HE64LO - Low HE64SO - Standard HE64MO - Medium HE64HO - High HE64VHO - Very High HE64XHO - Extreme	22K - 2200K 25K - 2500K 27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K			LE - Endcap Left End LN - No Endcap Left End LNJ - No Endcap Left End, with jumper	RNJ - No Endcap Right End, with jumper	CPB - Center Power Feed, Plenum rated 72" wires CJB - Center Power Feed, Junction Box CNPF - No Power Feed
							LNJ - No Endcap Left End, with jumper	RE - Endcap Right End RN - No Endcap Right End RNJ - No Endcap Right End, with jumper	CPB - Center Power Feed, Plenum rated 72" wires CJB - Center Power Feed, Junction Box CNPF - No Power Feed

1 - Custom Angle Corners are available, please consult Inside Sales with specific request.


2 - Title 24 JA8 achievable depending on Output, CCT, and Lens selections. See multiplier charts to calculate specific efficacies.

3 - Linii Corner fixtures cannot be paired with straight Linii Fixture that have endcaps on both ends (LERE). Linii Corner can only connect to another Linii Corner fixture or a straight Linii Fixture that is missing at least one endcap.

Powerfeed options for Straight Fixtures


LIN-LE-RE-CPB

Wire leads, plenum rated CL3R cable on Straight Fixture

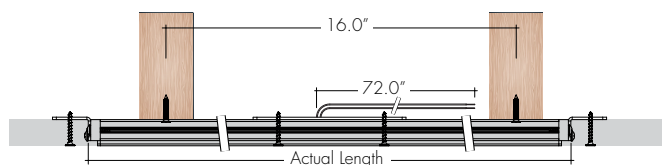


LIN-LE-RE-CJB

One integrated junction box centered on Straight fixture

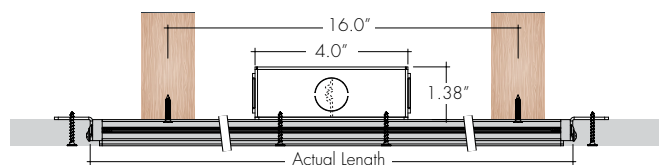

LIN-LE-RNJ-CNPF


No Power Feed, fixture is receiving power from adjacent fixture with jumper

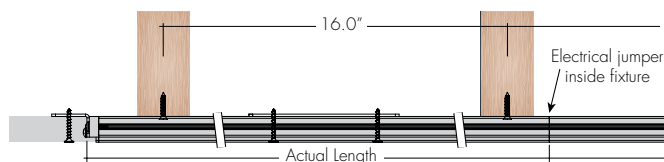

Powerfeed options for Corner Fixtures


LIN-FC-90-XX-DHS-CPB

Wire Leads centered on segment B of corner







LIN-IC-90-XX-DHS-CPB

Wire Leads centered on segment B of corner




LIN-OC-90-XX-DHS-CPB

Wire Leads centered on segment B of corner




LIN-FC-90-XX-GDS-CPB

Wire Leads centered on segment B of corner




LIN-IC-90-XX-GDS-CPB

Wire Leads centered on segment B of corner



LIN-OC-90-XX-GDS-CPB


Wire Leads centered on segment B of corner






Note: Plenum wire leads are shown, but the same standard also applied to the junction box which is also centered on segment B of the corner fixture.

Product Dimensions

Linii GDS - Gypsum Drywall Surface


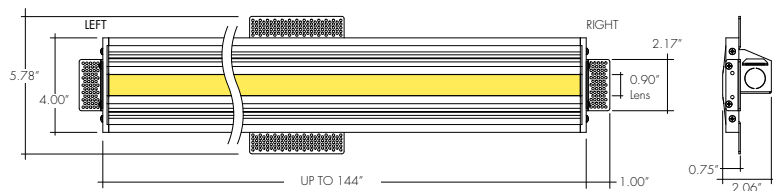


Linii DHS - Gypsum Drywall Surface to Hard Surface

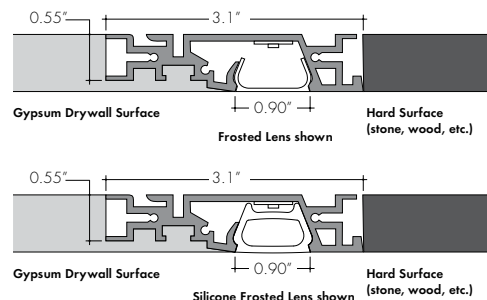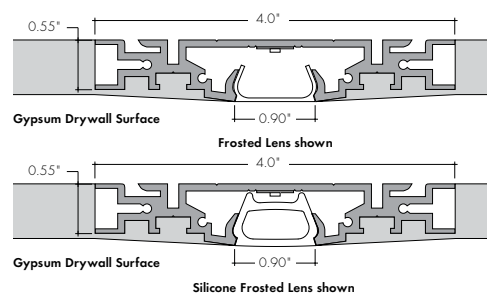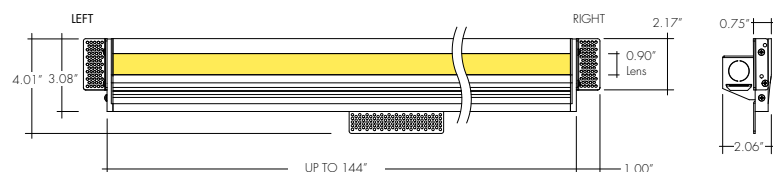

Accessory Options


Continuous Lens (Field Cuttable)



Note: Order the continuous (field cuttable) lens up to 160'. Recommended to avoid seams between multiple fixtures joining together.


LVSP-4T-BK

Low Voltage, 4 Terminal Splice Box, Black, IP20




Sample Layout of Power Feed

Jumper connection inside of fixture (lens not shown)




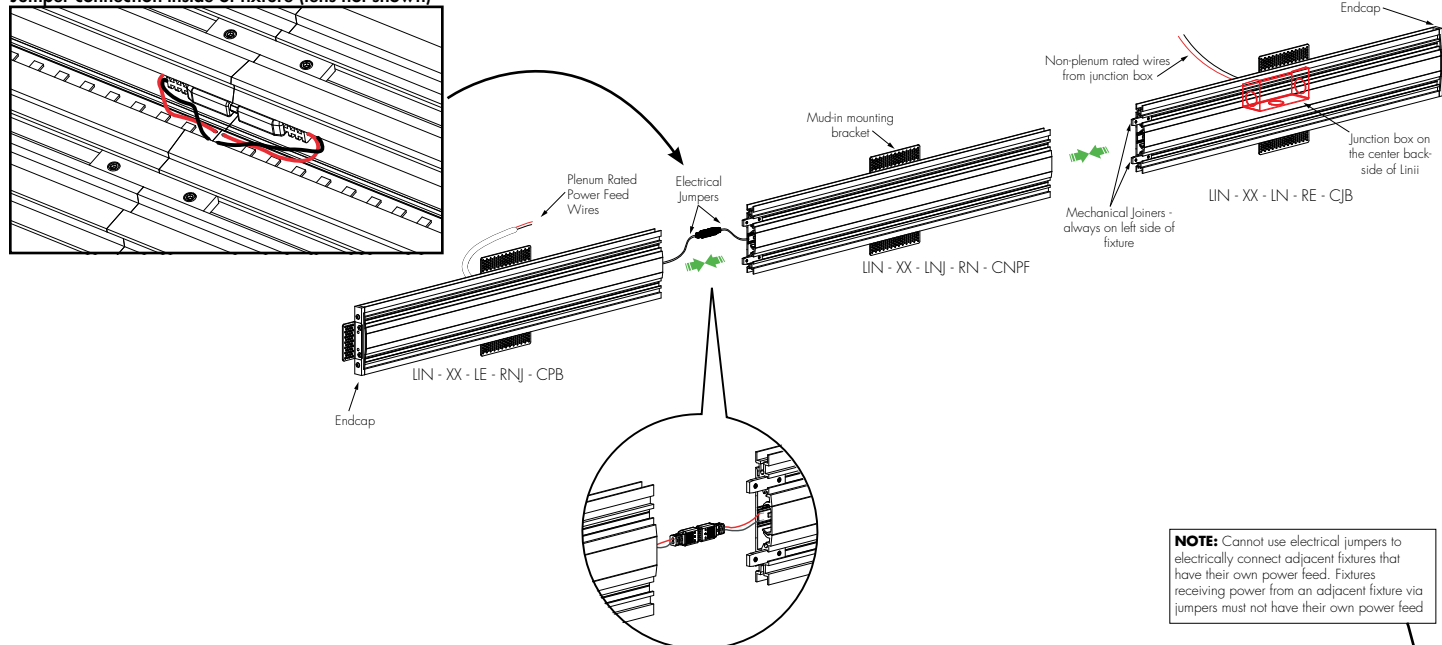


Invalid Sample Layout of Power Feed

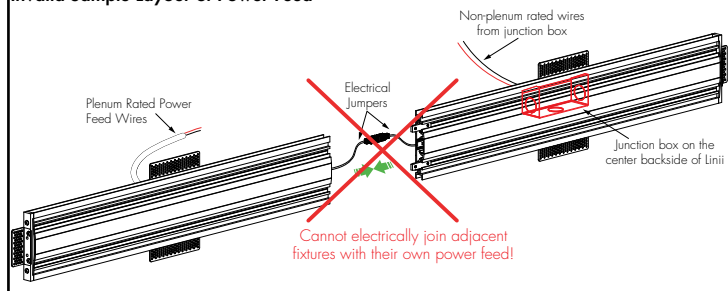


Powerfeeds and Connectors

Linking and Extension Cable Options




Layout Example

Corner types and straight runs are ordered individually

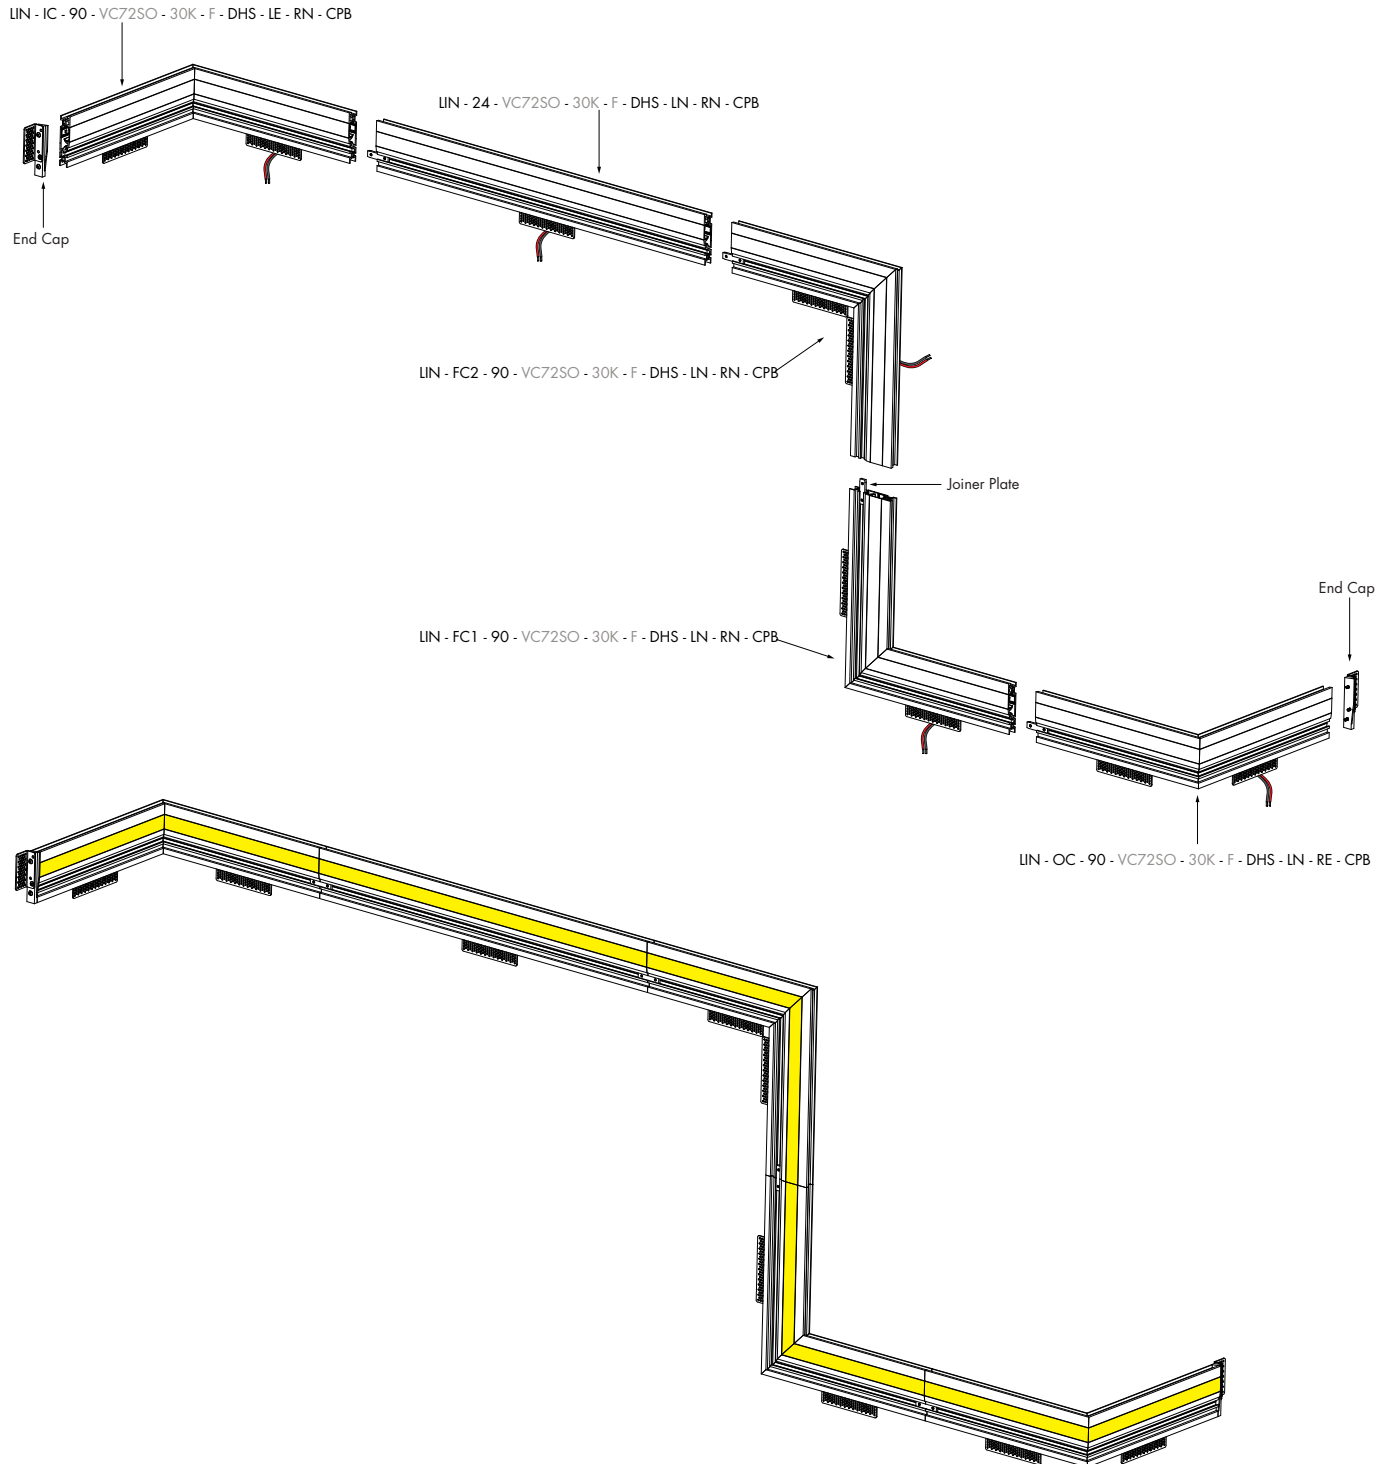


Light Transmission and Dotting

Output Options	Lens/Accessory							
	Frosted Lens				Frosted Silicon Lens			
Dimming Level	100%	50%	10%	1%	100%	50%	10%	1%
VC72VLO	ND	ND	ND	ND	ND	ND	ND	ND
VC72LO	ND	ND	ND	ND	ND	ND	ND	ND
VC72SO	ND	ND	ND	ND	ND	ND	ND	ND
VC72MO	ND	ND	ND	ND	ND	ND	ND	ND
VC72HO	ND	ND	ND	ND	ND	ND	ND	ND
VC72VHO	ND	ND	ND	ND	ND	ND	ND	ND
VC72XHO	ND	ND	ND	ND	ND	ND	ND	ND
HE64VLO	ND	ND	ND	ND	ND	ND	ND	ND
HE64LO	ND	ND	ND	ND	ND	ND	ND	ND
HE64SO	ND	ND	ND	ND	ND	ND	ND	ND
HE64MO	ND	ND	ND	ND	ND	ND	ND	ND
HE64HO	ND	ND	ND	ND	ND	ND	ND	ND
HE64VHO	ND	ND	ND	ND	ND	ND	ND	ND
HE64XHO	ND	ND	ND	ND	ND	ND	ND	ND
Transmission Percentage	100%				113%			



Photometry

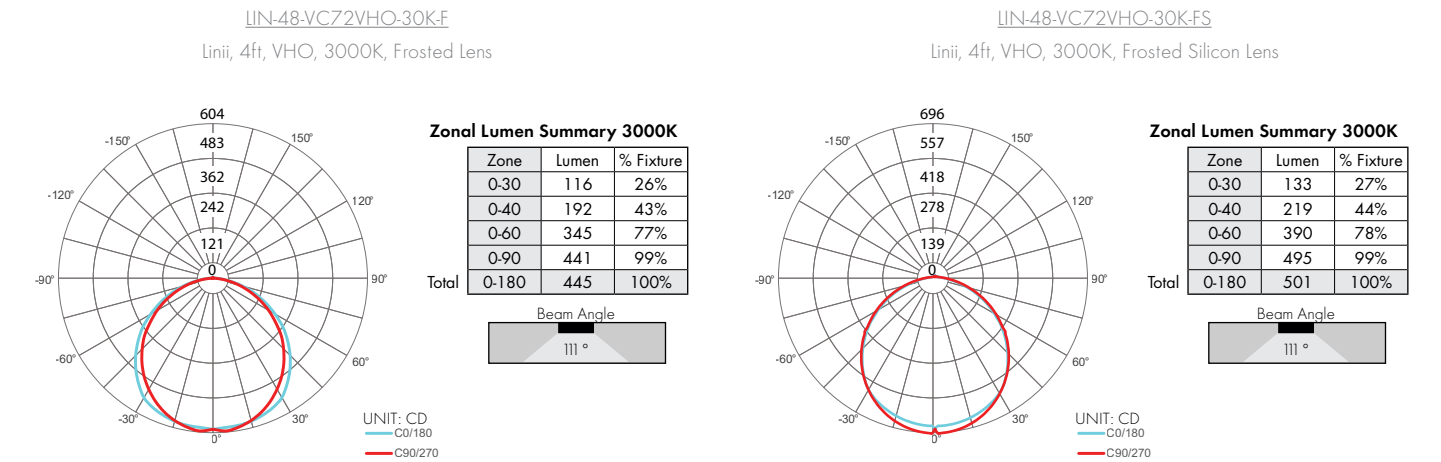

Power Consumption

Please visit the link/QR code below to access the Luminii Power Consumption Chart tool on our website.

There you will be able to select your fixture, output, and desired power feed to get a full power consumption table.



I'm also click-able

Desired Nominal Length: _____

Desired Output: _____

Desired CCT: _____

Voltage Drop Calculator

The below chart assumes nominal voltage of 24 Volts and a Voltage Drop Allowance of 3% through the wire

Wattage [W]	Wire Length From Power Supply to Start of Run [ft]						
	12 AWG	14 AWG	16 AWG	18 AWG	20 AWG	22 AWG	24 AWG
5	1088.2	684.4	430.3	270.6	170.2	107.1	67.3
10	544.1	342.2	215.1	135.3	85.1	53.5	33.7
15	362.7	228.1	143.4	90.2	56.7	35.7	22.4
20	272.0	171.1	107.6	67.7	42.6	26.8	16.8
25	217.6	136.9	86.1	54.1	34.0	21.4	13.5
30	181.4	114.1	71.7	45.1	28.4	17.8	11.2
35	155.5	97.8	61.5	38.7	24.3	15.3	9.6
40	136.0	85.5	53.8	33.8	21.3	13.4	8.4
45	120.9	76.0	47.8	30.1	18.9	11.9	7.5
50	108.8	68.4	43.0	27.1	17.0	10.7	6.7
55	98.9	62.2	39.1	24.6	15.5	9.7	6.1
60	90.7	57.0	35.9	22.6	14.2	8.9	5.6
65	83.7	52.6	33.1	20.8	13.1	8.2	5.2
70	77.7	48.9	30.7	19.3	12.2	7.6	4.8
75	72.5	45.6	28.7	18.0	11.3	7.1	4.5
80	68.0	42.8	26.9	16.9	10.6	6.7	4.2
85	64.0	40.3	25.3	15.9	10.0	6.3	4.0
90	60.5	38.0	23.9	15.0	9.5	5.9	3.7
96	56.7	35.6	22.4	14.1	8.9	5.6	3.5

Power Supplies

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

For use with Static White



Ordering Code - Universal Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	WATTAGE	OUTPUT
PS - Power Supply, 120-277VAC	UNI - 0-10V Dimming (0.1%), Phase Dimming (0.1%)	30 - 30 Watts 60 - 60 Watts 96 - 96 Watts 3x96 - 3x96 Watts	24 - 24 VDC

Compatibility: View a complete list of compatible dimmers on the PS-UNI product page.

0-10V - 0.1% dimming
MLV/ELV/TRIAC - 0.1% dimming, consult dimming compatibility chart

MODELS	PS-UNI-30W	PS-UNI-60W	PS-UNI-96W	PS-UNI-3X96W
Length	6.50"	7.40"	8.66"	11.85"
Width	3.73"	3.73"	3.73"	4.32"
Depth	1.61"	1.61"	1.61"	1.81"

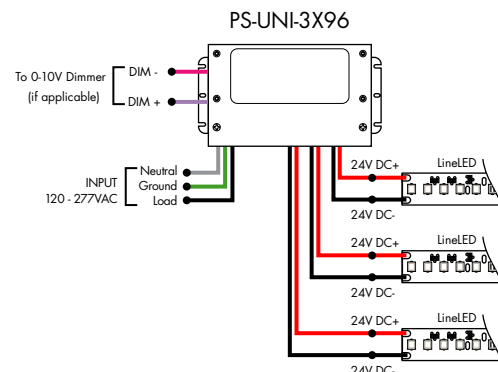
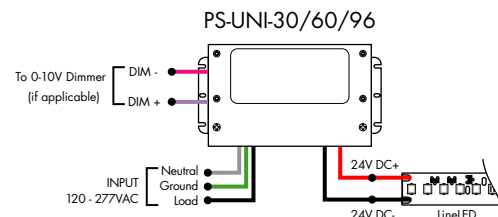


For use with Static White

Ordering Code - 0-10V Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS - Power Supply, 120-277VAC	010V-LIN - 0-10V Dimming (0.1%), Linear 010V-LOG - 0-10V Dimming (0.1%), Logarithmic	D - Dry	96 - 96 Watts 3x96 - 3x96 Watts	24 - 24 VDC

MODELS	96W	3X96
Length	14.40"	15.00"
Width	5.20"	6.62"
Depth	2.60"	4.45"

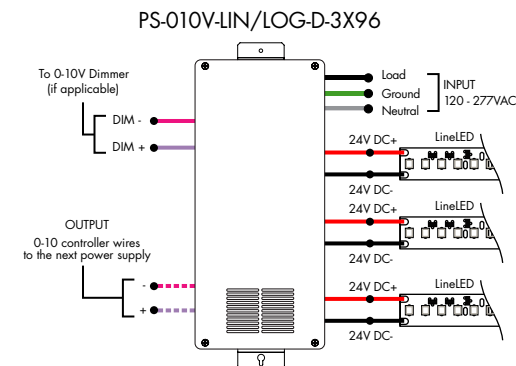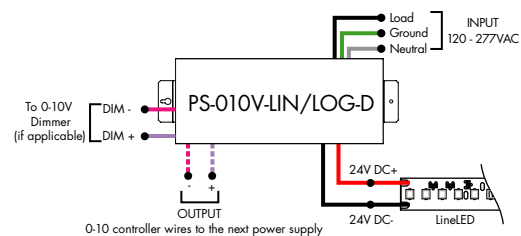


Power Supplies

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

For use with Static White

Ordering Code - Athena 0-10V LED Driver

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT	FEATURE
PS - Power Supply, 120-277VAC	010V-LIN - 0-10V Dimming (0.1%), Linear 010V-LOG - 0-10V Dimming (0.1%), Logarithmic	D-Dry	96-96 Watts	24-24 VDC	AWNDR-Athena

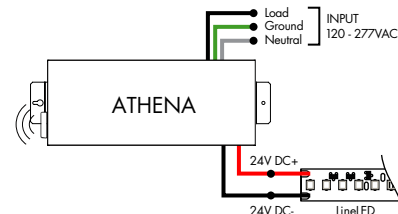


MODELS	96W
Length	14.40"
Width	5.20"
Depth	2.60"

For use with Static White

Ordering Code - DALI 2 Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS - Power Supply, 120-277VAC	DALI2-DT6 - DALI2 DT6 (0.1%)	D-Dry	96-96 Watts	24-24 VDC

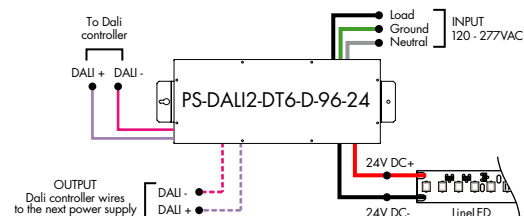


Model	96W
Length	14.40"
Width	5.20"
Depth	2.60"


For use with Static White

Ordering Code - DALI Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS - Power Supply, 120-277VAC	DALI - DALI (0.1%)	D-Dry	96-96 Watts 3x96-3x96 Watts	24-24 VDC

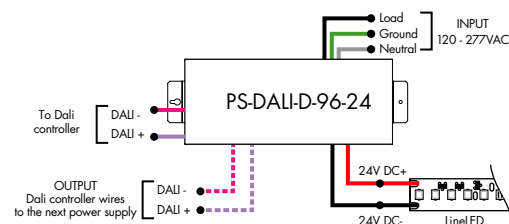

Model	96W	3X96
Length	14.40"	15.00"
Width	5.20"	6.62"
Depth	2.60"	4.56"

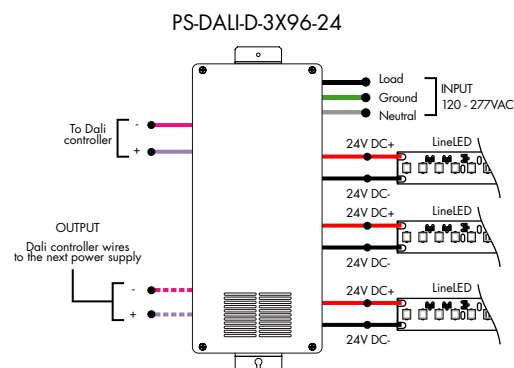

Power Supplies

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.



For use with Static White

Ordering Code - DMX Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS - Power Supply, 120-277VAC	DMX - DMX (0.1%)	D - Dry	96 - 96 Watts 3x96 - 3x96 Watts	24 - 24 VDC

MODELS	96W	3X96
Length	14.40"	15.00"
Width	5.20"	6.62"
Depth	2.60"	4.56"

ZONAL CONTROL POWER SUPPLIES.
CONTROL MULTIPLE TAPES/ZONES USING DMX CHANNELS.

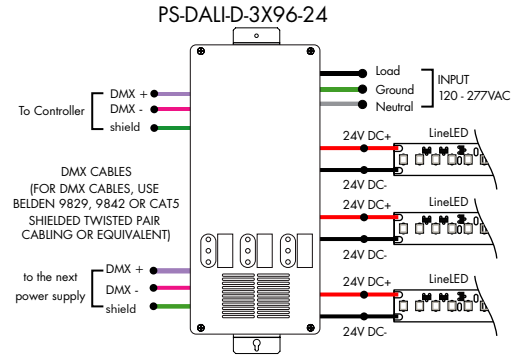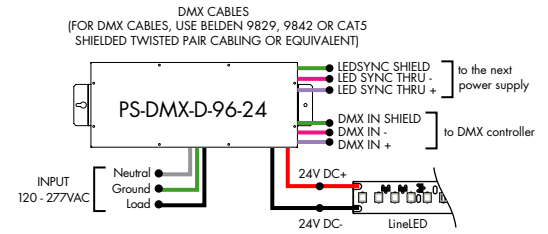


For use with Static White

Ordering Code - Non-Dimming Power Supply, 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS - Power Supply, 120-277VAC	ND - Non Dimming	D - Dry	96 - 96 Watts	24 - 24 VDC

MODELS	96W
Length	14.40"
Width	5.20"
Depth	2.60"

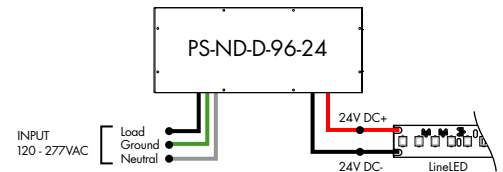


For use with Static White

Ordering Code - In-Ground Power Supplies

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS120 - Power Supply, 120VAC PS240 - Power Supply, 240VAC PS277 - Power Supply, 277VAC	ELV - ELV Dimming (1%)	IG - In Ground	2X96 - 2X96 Watts	24 - 24 VDC

MODELS	2X96W
Length	8.40"
Width	8.30"
Depth	8.10"

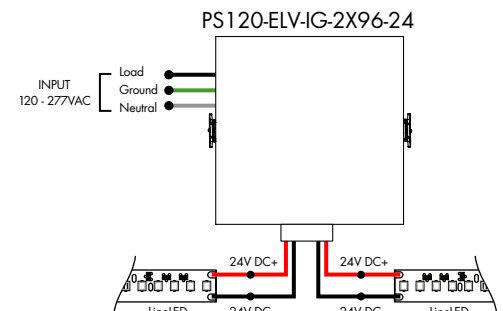

Power Supplies

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.



Luminii is a Lutron OEM Advantage Partner


Lutron Power Supplies 1%

MODEL

L3DA4U1UKL-CV240

HiLume™ 1% EcoSystem Voltage LED driver 40W max

MODELS	L3DA4U1UKL-CV240
Length	4.98"
Width	4.00"
Depth	2.62"

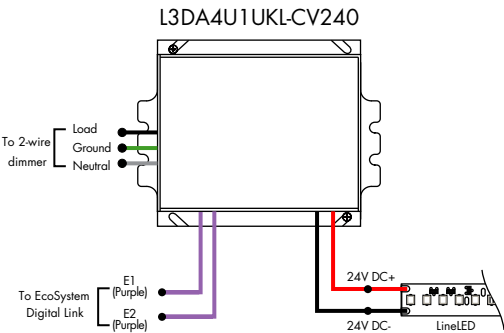

Luminii is a Lutron OEM Advantage Partner

Lutron Power Supplies 0.1%

MODEL

L3D0-96W24V-U

HiLume™ 0.1% EcoSystem Voltage LED Driver with Soft-On, Fade-to-Black™ 96W max

MODELS	L3D0
Length	10.50"
Width	5.50"
Depth	2.00"

