



Features

The Myka Recessed Trimless premium extrusion platform has been specifically designed for seamless continuous lines of light. With field cuttable extrusion and pre-welded corner configurations, this flush mud-in mounted extrusion can be used on drywall applicaitons in a wide variety of configurations. Multiple diffuser lens options allow for great flexibility and adaptability for any application. Channels come included with end caps.

Finish

Silver anodized, White, Black, Bronze

Diffuser Lens

Polycarbonate, snap-in-place, UV resistant

Mounting


Integrated mud-in flange to be used with Number 6 size screws

Warranty

7 Years

Declare.  MADE IN U.S.A

Product Dimensions

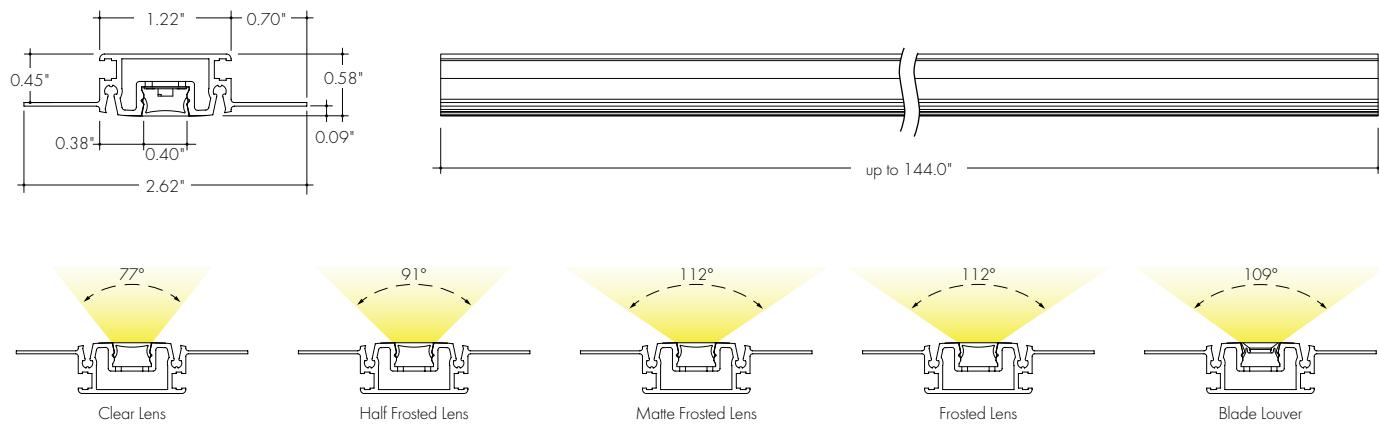

MOUNTING ACCESSORIES

EXTRUSION LENGTH	INCLUDED SCREWS
48"	8
72"	12
96"	16
120"	18
144"	20

Each pair of endcaps includes 1x H3 (no wire feed hole) and 1x H4 (with hole) where applicable. Additional endcaps and mounting clips are available for purchase.

TRANSMISSION PERCENTAGE (COMPARED TO LED TAPE WITHOUT CHANNEL)

LENS	TRANSMISSION %
Clear	80%
Half Frosted	67%
Matte Frosted	58%
Frosted	46%
White Blade Louver	42%
Black Blade Louver	25%

See LED tape spec sheet for lens dotting characteristics & compatibility
Use complete Dotting Chart Tool online for more dotting information [\(Link\)](#)

Ordering Code

MODEL	LENGTH	LENS	MOUNTING ²	FINISH
MKLC-Myka Recessed Trimless Channel ¹	48-48"	C-Clear	MF-Mounting Flange	MILL-Mill Finish
	72-72"	F-Frosted		
	96-96" ³	HF-Half Frosted		
	120-120" ³	MF-Matte Frosted		
	144-144" ³	BLV-Black Blade Louver		
		WLV-White Blade Louver		

1 - Two End Caps are included with channel. Order additional End Caps as necessary.


2 - Mounting screws are included with channel. Refer to chart above for provided mounting screw quantities.

3 - For Channels and Lenses over 96", incremental shipping charges will apply.

Myka Recessed Trimless Corner Dimensions

MKLC-FC-90


Flat Corner

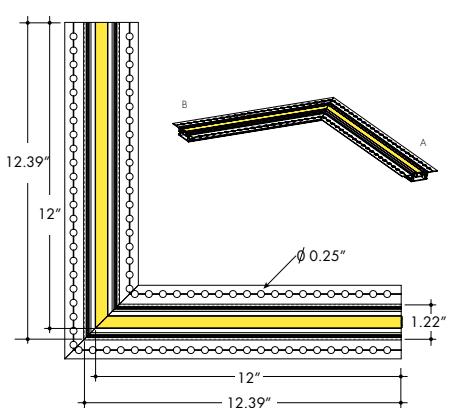

Light dimension is 12" x 12". Actual slot cut-out dimension is also shown.

MKLC-IC-90


Inner Corner

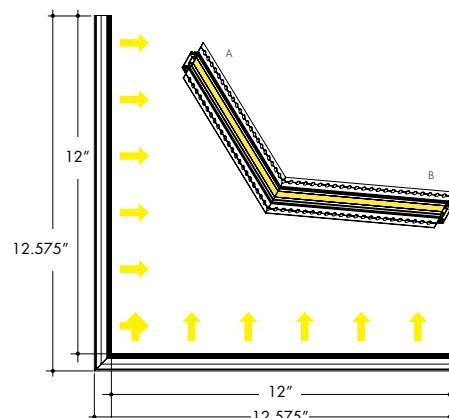

Light dimension is 12" x 12". Actual slot cut-out dimension is also shown.

MKLC-OC-90

Outside Corner

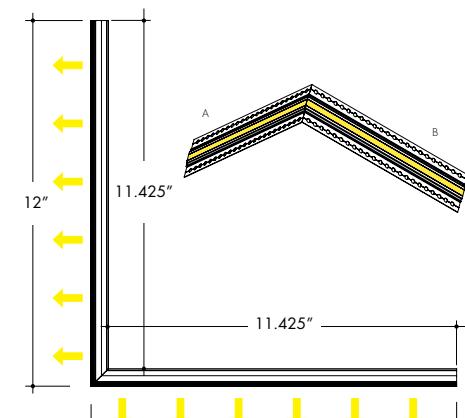

Light dimension is 12" x 12". Actual slot cut-out dimension is also shown.

Included Mounting Screws

Corner Option	FC-90	IC-90	OC-90
Number of Screws	4	4	4

TRANSMISSION PERCENTAGE (COMPARED TO LED TAPE WITHOUT CHANNEL)

LENS	TRANSMISSION %
Clear	80%
Half Frosted	67%
Matte Frosted	58%
Frosted	46%
White Blade Louver	42%
Black Blade Louver	25%

See LED tape spec sheet for lens dotting characteristics & compatibility

Ordering Code

MODEL	CORNER TYPE	CORNER TYPE ¹	LENS	MOUNTING ²	FINISH
MKLC-Myka Recessed Trimless Channel	FC-Flat coner IC-Inside coner OC-Outside coner	90-90°	C-Clear F-Frosted HF-Half Frosted MF-Matte Frosted BLV-Black Blade Louver WLV-White Blade Louver	MF-Mounting Flange	MILL-Mill Finish


1 - Custom Corner angle are available upon request.

2 - Mounting screws are included with channel. Refer to chart above for provided mounting screw quantities.

Accessory Options

EC-MKLC-F-H3.

Endcap, mill finish

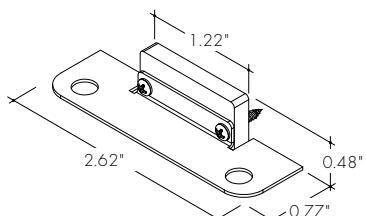

MCAL-SJ

Straight Joiner, 1 set of 2 needed per connection




One set of two is included per extrusion. Order additional as necessary

Regressed Blade Louver

LV-BL-MKC-12-BK


Blade Louver reduces glare at high angle in two directions
Also available with complete fixture, use ordering code
-BLV

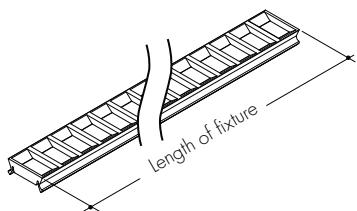

This Black louver/lens combo comes in 12" increments and sits in place of a Myka lens, not in addition to.

LV-BL-MKC-12-WH


Blade Louver reduces glare at high angle in two directions
Also available with complete fixture, use ordering code
-WLV

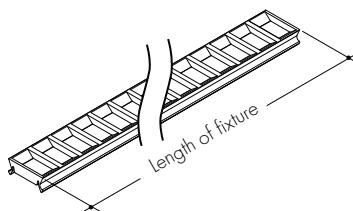




This White louver/lens combo comes in 12" increments and sits in place of a Myka lens, not in addition to.

Sample Layout




Myka Recessed Trimless can have seamless continuous runs by joining multiple extrusions together and laying in LED tape(s).

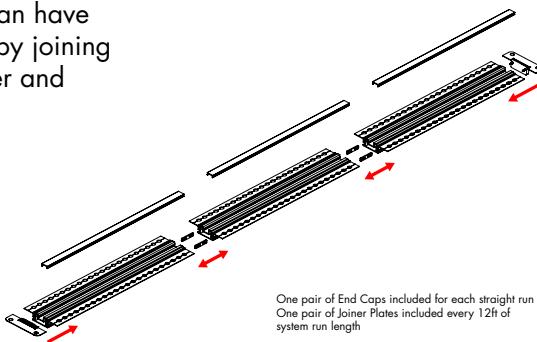

One LED strip, one Power Feed

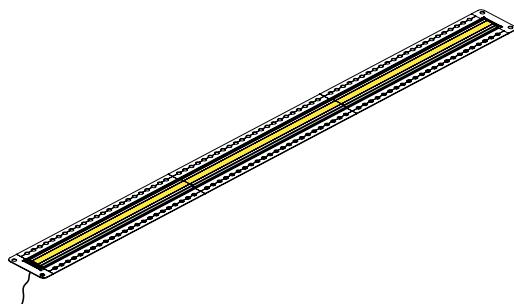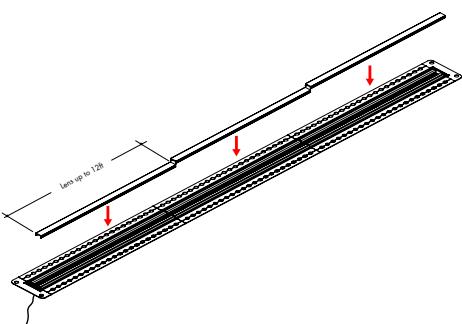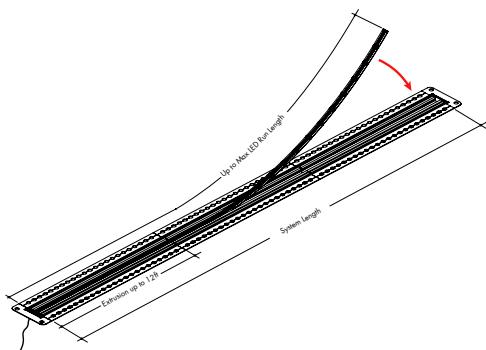

Multiple LED strips, multiple power feeds.
For when the Myka continuous run exceeds 96W or the max run length of the LED strip

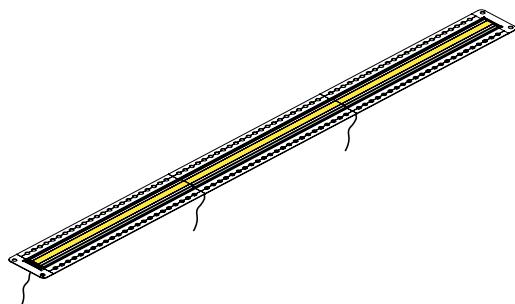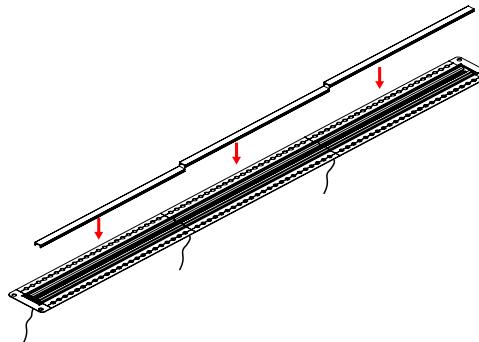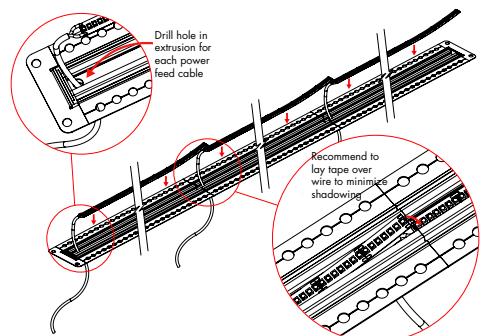

Sample Layout

