

MINIMO 1 EYE

PRODUCT OVERVIEW

STANDARD LIGHT ENGINE



KEY FEATURES

- Beam Options: 12 | 30 | 60
- Light Engine Performance: 164lm | 2.24W
- Movement: 360 Pan | 30 Tilt
- Tool-less field changeable optics
- UK Part L1 / L2 (Display) Compliant



OVERVIEW

Minimo 1 Eye is a Constant Current single source LED recessed spotlight that is machined from aerospace grade aluminium 6063-T6 and comes as standard in white, black and brushed aluminium. It has three site-changeable optics for flexible beam distribution and is fully adjustable with 360° pan and 30° tilt. Our 164lm | 2.24W light engine has a max peak intensity of 1566cd.

PERFORMANCE

	Standard		
	Narrow	Medium	Flood
FWHM	12°	30°	60°
Luminous Flux	164 lm	150 lm	163 lm
Peak Intensity	1566 cd	470 cd	163 cd
CCT	2700K 3000K		
CRI Min.	95 95		
LED Current	0.700 A		
Voltage	3.2 V		
Input Wattage	2.24 W		
Efficacy	73.2 lm/W		
Driver Type	Constant Current Remote		
Class	SELV Class III		

ORDER CODE

Model	Type	Trim	Output	CCT	Beam Angle	Finish
MNOE Minimo 1 Eye	RC Recessed	TR Trimmed	SO Standard Output	27K 2700K	NR Narrow 12°	WH White
				30K 3000K	ME Medium 30°	BK Black
					WD Wide 60°	AL Br. Aluminium
						RBZ Rubbed Bronze
						BR Br. Brass
						PB Polished Brass

Example code: MNOE-RC-TR-SO-27K-NR-WH

See Drivers, Power Supplies and Accessories sections for further order codes

LIGHT ENGINE SELECTION

This product is available with a single static white light engine option outlined below.

STANDARD
OUTPUT

Our standard output light engines embody Precision's commitment to excellence, delivering high CRI, efficient performance, and clean, well-defined beams.

- High CRI
- Crisp clean beams

LIFETIME & ENVIRONMENTAL

At Precision, we design and engineer our products with longevity in mind. Many of the components that make up our light fixtures are both modular and re-usable, making it possible to service and repair them throughout their life in service. Once our products reach the end of their useful life, it is possible to re-work and renew them in to a new product. We prioritise the use of recyclable materials in both our products and packaging, and encourage our customers to engage responsibly in the correct disposal of any materials we supply.

CIBSE TM65	8.39 Kg/CO2e
CIBSE TM66	2.4
RoHS Compliance	Yes
REACH Compliance	Yes
WEEE Compliance	Yes - Registered Producer
Declare	LBC Red List Approved
Lifetime	L90B10 100,000hrs
Warranty	5 Years


UK PART L	
Part L1A / L1B (Dwellings)	Compliant 164 lm/W ≥75 lm/W source lumens Source lm (367 lm) / Source W (2.24 W)
Part L2A (General)	- ≥95lm/W delivered lumens
Part L2A (Display)	Compliant 164 lm/W ≥80 lm/W source lumens Source lm (367 lm) / Source W (2.24 W)

MINIMO 1 EYE

DIMENSIONS & FINISHES

STANDARD LIGHT ENGINE


DIMENSIONS

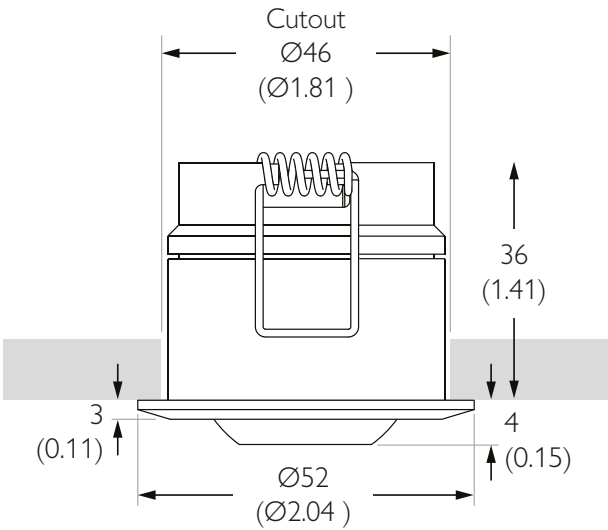

MECHANICAL

Location	IP20 Indoor Dry Location Only	Cutout	ø46mm (1.81")
Mounting	Recessed	Ceiling Thickness	7-25mm (0.28-0.98")
Adjustability	360 Pan 30 Tilt	Product Class	SELV Class III
Lockable	N/A	Material	Machined AL 6063-T6 Machined Brass
Accessories	N/A	Weight	89g 0.20lb

FINISHES

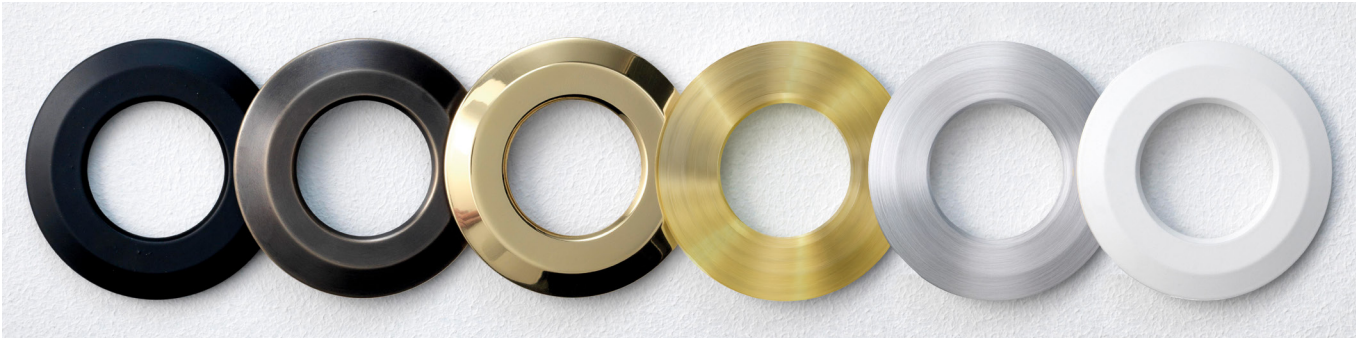

Black Rubbed Bronze Polished Brass Brushed Brass Brushed Aluminium White

20W | 0-10V | Remote | Constant Current

Input Voltage	230VAC 50/60 Hz
Driver Type	Remote Constant Current
Location	IP20 Indoor Location Only
Dimming Control	0-10V
Min. Dim Level	0.1%
Flicker	IEEE P1789 Compatible No Observable Effect
Wiring Distance	16 AWG - 36m (118') 18 AWG 22m (72')



	All CCT's		L	W	H
Max. Lights	1 to 8 in series	mm	160	41	30
Order Code	PSCC-20-700-A-EL	in	6.3	1.61	1.18

20W | DALI-2 | Remote | Constant Current

Input Voltage	230VAC 50/60 Hz
Driver Type	Remote Constant Current
Location	IP20 Indoor Location Only
Dimming Control	DALI-2
Min. Dim Level	0.1%
Flicker	IEEE P1789 Compatible No Observable Effect
Wiring Distance	16 AWG - 36m (118') 18 AWG 22m (72')



	All CCT's		L	W	H
Max. Lights	1 to 8 in series	mm	160	41	30
Order Code	PSCC-20-700-D-EL	in	6.3	1.61	1.18

30W | 0-10V | Remote | Constant Current

Input Voltage	120-277V 50/60 Hz
Driver Type	Remote Constant Current
Location	IP20 Indoor Location Only
Dimming Control	0-10V
Min. Dim Level	0.1%
Flicker	IEEE P1789 Compatible No Observable Effect
Wiring Distance	16 AWG - 36m (118') 18 AWG 22m (72')



	All CCT's		L	W	H
Max. Lights	1 to 12 in series	mm	348	65	47
Order Code	USCC-30-700-A-EL-ENC	in	13.7	2.56	1.85

30W | DALI-2 | Remote | Constant Current


Input Voltage	120-277V 50/60 Hz
Driver Type	Remote Constant Current
Location	IP20 Indoor Location Only
Dimming Control	DALI-2
Min. Dim Level	0.1%
Flicker	IEEE P1789 Compatible No Observable Effect
Wiring Distance	16 AWG - 36m (118') 18 AWG 22m (72')



	All CCT's		L	W	H
Max. Lights	1 to 12 in series	mm	348	65	47
Order Code	USCC-30-700-D-EL-ENC	in	13.7	2.56	1.85

12W | Phase | Remote | Constant Current

Input Voltage	120V 50/60Hz
Driver Type	Remote Constant Current
Location	IP20 Indoor Location Only
Dimming Control	Phase
Min. Dim Level	1.0%
Flicker	IEEE P1789 Compatible No Observable Effect
Wiring Distance	16 AWG - 14m (46') 18 AWG 9m (30')

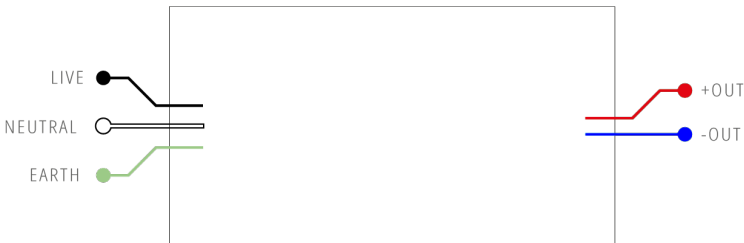

	All CCT's		L	W	H
Max. Lights	2 to 5 in series	mm	247	65	47
Order Code	USCC-12-700-P-HT-ENC	in	9.72	2.56	1.85

OUTPUT SCALING

CCT	Output Multiplier	CRI	R9 Typ.	TM-30: Rf	TM-30: Rg	Max Lm
2400K	-	-	-	-	-	-
2700K	1.00	95	65	90	98	164
3000K	1.00	95	65	90	99	164
3500K	-	-	-	-	-	-
4000K	-	-	-	-	-	-

Colour Consistency: 3 SDCM

PHOTOMETRY

NARROW

FWHM

12°

Delivered Flux

164 lm

Peak Intensity

1566 cd

Cd: 0

267

533

800

1067

1333

1600

90°

80°

70°

60°

50°

40°

0.21m

1m

1566lx

174fc

0.6'

3'

0.42m

2m

392lx

44fc

1.3'

6'

0.63m

3m

174lx

19fc

1.9'

9'

0.84m

4m

98lx

11fc

2.5'

12'

1.05m

5m

63lx

7fc

3.2'

15'

5fc

3.8'

18'

MEDIUM

FWHM

30°

Delivered Flux

150 lm

Peak Intensity

470 cd

Cd: 0

83

167

250

333

417

500

90°

80°

70°

60°

50°

40°

0.54m

1m

470lx

52fc

1.6'

3'

1.07m

2m

118lx

13fc

3.2'

6'

1.61m

3m

52lx

6fc

4.8'

9'

2.14m

4m

29lx

3fc

6.4'

12'

2.68m

5m

19lx

2fc

8.0'

15'

1fc

9.6'

18'

FLOOD

FWHM

60°

Delivered Flux

163 lm

Peak Intensity

163 cd

Cd: 0

33

67

100

133

167

200

90°

80°

70°

60°

50°

40°

1.15m

1m

163lx

18fc

3.5'

3'

2.31m

2m

41lx

5fc

6.9'

6'

3.46m

3m

18lx

2fc

10.4'

9'

4.62m

4m

10lx

1fc

13.9'

12'

5.77m

5m

7lx

1fc

17.3'

15'

1fc

20.8'

18'

OPTICS

There are 3 interchangeable optics

Optic	Optic	Optic
		
Narrow TIR Optic FWHM 12 deg	Medium TIR Optic FWHM 30 deg	Wide TIR Optic FWHM 60 deg
Order Code 701-12	Order Code 701-30	Order Code 701-60

ACCESSORIES

This product does not have interchangeable accessories, if required please contact us for modification opportunities